


15343 MONACO STREET
THORNTON, COLORADO 80602

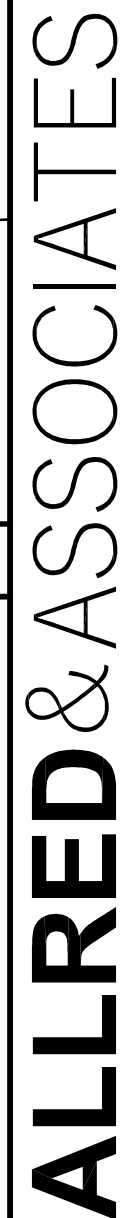

ARCHITECTURE | PLANNING | INTERIOR DESIGN
5680 BURBANK STREET, SUITE 125, BROOMFIELD, COLORADO 80020
PHONE: 303.465.4306 www.allredarch.com

• JOB NO. 2309

BID SET

THORNTON, COLORADO 80602

CITY OF THORNTON

FIRE STATION #8


15343 MONACO STREET

A0.0

TITLE SHEET

ISSUE DATE: 2024 0927

1 MAIN LEVEL CODE PLAN
SCALE: 1/8"=1'-0"

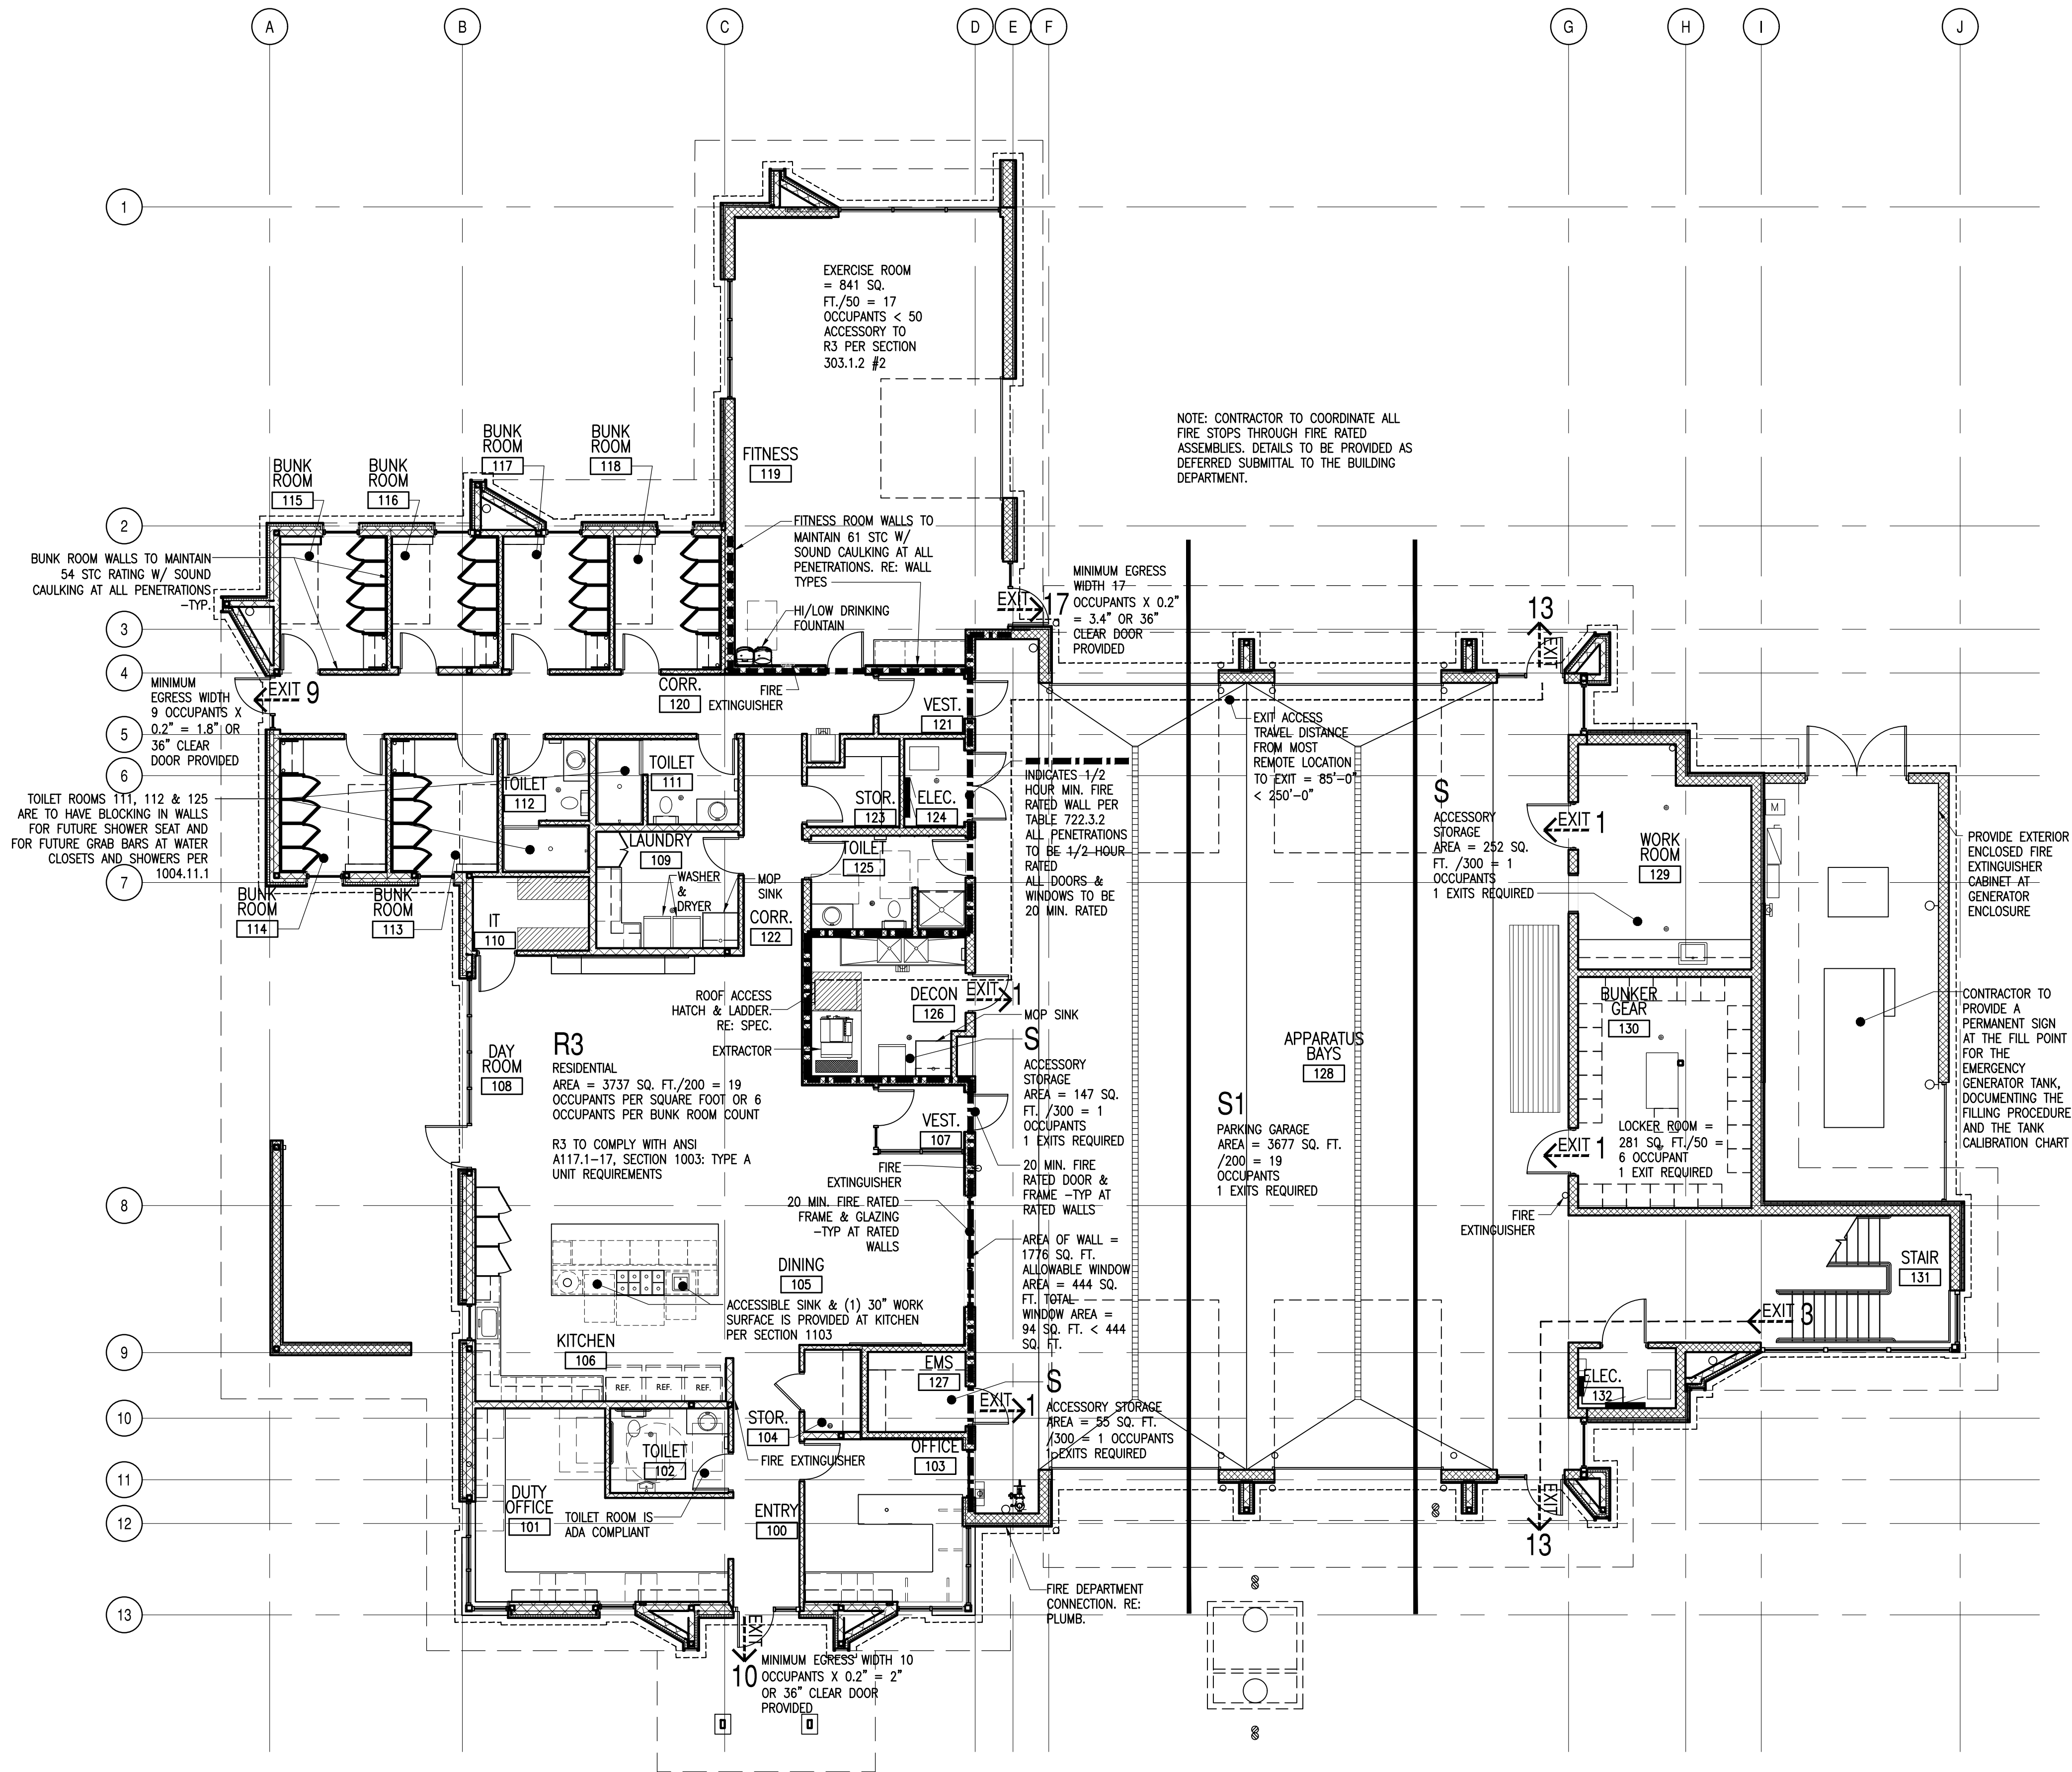

CITY OF THORNTON
FIRE STATION #8
15343 MONACO STREET
THORNTON, COLORADO 80602

REVISION NAME		DATE

ISSUE DATE: 2024 0927

MAIN LEVEL
CODE PLAN

A0.1

ALLRED & ASSOCIATES

ARCHITECTURE | PLANNING | INTERIOR DESIGN

589 BURLINGAME STREET, SUITE 125, BROOMFIELD, COLORADO 80020
PHONE: 303.465.4306
WWW.ALLREDARCH.COM

BID SET

• JOB NO. 2309

1/8"=1'-0"

CITY OF THORNTON
FIRE STATION #8
15343 MONACO STREET
THORNTON, COLORADO 80602

[illegible]

ISSUE DATE: 2024 0927

MEZZ. CODE PLAN
& CODE INFO.

AO.2

BUILDING CODES & INFO.

CODES USED:

2021 INTERNATIONAL BUILDING CODE
2021 INTERNATIONAL PLUMBING CODE
2021 INTERNATIONAL MECHANICAL CODE
2021 NATIONAL ELECTRIC CODE
2021 INTERNATIONAL FUEL GAS CODE
2021 INTERNATIONAL ENERGY CONSERVATION CODE
2021 INTERNATIONAL FUEL GAS CODE
2017 ICC ANSI A117.1

FIRE-RESISTIVE
RATING EXTERIOR
(TABLE 602)

<5'
>5'<10'
>10'<30'
>30'

1-HOUR
1-HOUR
NR
NR

OCCUPANT LOAD
SUMMARY

S-1 = 26 OCCUPANTS
R-3 = 6 OCCUPANTS

DESCRIPTION:

THIS PROJECT WILL CONSIST OF A ONE STORY FIRE STATION WITH ONE MEZZANINE. THE APPARATUS BAYS WILL NOT BE USED FOR VEHICLE REPAIRS. ASSOCIATED SITE WORK WILL INCLUDE A CONCRETE DRIVE AND PARKING LOT. SITE UTILITIES CONSIST OF WATER, SANITARY, ELECTRIC, GAS SERVICES, EMERGENCY GENERATOR. LANDSCAPING IS PART OF THIS PROJECT.

OCCUPANCY TYPE:

R3 AT BUNK ROOMS, OFFICE, DAY ROOMS, KITCHEN, DINING & FITNESS ROOM
S1 AT STORAGE ROOMS & MEZZANINE
S1 (PARKING GARAGE) AT APPARATUS BAY

420.2 SEPARATION WALLS

WALLS SEPARATING SLEEPING UNITS IN THE SAME BUILDING AND WALLS SEPARATING SLEEPING UNITS FROM OTHER OCCUPANCIES CONTIGUOUS TO THEM IN THE SAME BUILDING SHALL BE CONSTRUCTED AS FIRE PARTITIONS IN ACCORDANCE WITH SECTION 708 EXCEPTION 2.

OCCUPANCY CLASSIFICATION AND USE (CHAPTER 3)

S1 (APPARATUS BAYS)
R3 (BUNK ROOMS, DAY ROOM, OFFICES & FITNESS)

ALLOWABLE AREA FACTOR:
(TABLE 506.2)

S-1 = 2 STORY (SPRINKLED) 60 FEET (SPRINKLED)
R-3 = 4 STORY (SPRINKLED) 60 FEET (SPRINKLED)

GENERAL HEIGHT AND AREA LIMITATIONS:
(TABLE 506.2)

S-1 = 36,000 S.F. (S1)
R-3 = UNLIMITED

ACTUAL AREA:

MAIN LEVEL 10,328 SQ. FT.
MEZZANINE LEVEL 775 SQ. FT.
TOTAL 11,091 S.F. AND 1 STORY (28'-0") > 27,000 S.F.
AND 2 STORIES

505 MEZZANINES:

AREA LIMITATIONS: THE AGGREGATE AREA OF A MEZZANINE WITHIN A ROOM SHALL NOT EXCEED ONE-THIRD OF THE AREA OF THAT ROOM OR SPACE IN WHICH THEY ARE LOCATED.
1/3 OF 3677 SQ. FT. = 1226 S.F. > 773 SQ. FT.

CONSTRUCTION TYPE:

VB FULLY SPRINKLED WITH SMOKE ALARMS IN R-3 BUNK ROOMS AND SMOKE/CO ALARMS IN THE CORRIDORS OUTSIDE THE BUNK ROOMS. FIRE PROTECTION SYSTEMS (FIRE SPRINKLERS AND FIRE ALARM) SHALL BE SUBMITTED FOR REVIEW, APPROVAL AND INSPECTED BY THE FIRE DEPARTMENT.

CONSTRUCTION CLASSIFICATION:
(TABLE 601)

BUILDING ELEMENT
STRUCTURAL FRAME NR
EXTERIOR BEARING WALLS NR
INTERIOR BEARING WALLS NR
NON BEARING EXTERIOR WALLS NR
NON BEARING INTERIOR WALLS NR
FLOOR CONSTRUCTION NR
ROOF CONSTRUCTION NR
SHAFT ENCLOSURE NR

TYPE V-B
REQUIREMENT

FIRE-RESISTIVE
RATING EXTERIOR
(TABLE 602)

<5'
>5'<10'
>10'<30'
>30'

1-HOUR
1-HOUR
NR
NR

OCCUPANT LOAD
SUMMARY

S-1 = 26 OCCUPANTS
R-3 = 6 OCCUPANTS

EMERGENCY
ESCAPE
AND RESCUE
(SECTION 1030)

EMERGENCY ESCAPE & RESCUE OPENINGS ARE PROVIDED PER SECTION 1030

PLUMBING FIXTURES
(TABLE 2902.1)
OCCUPANT LOAD
R3 USED

1/10 WATER CLOSETS REQUIRED MALE & FEMALE
1/10 LAVATORIES REQUIRED
1/8 SHOWERS REQUIRED

OCCUPANTS = 6 (3 MEN & 3 WOMEN)

REQUIRED
MALE WC .6
MALE LAV. .6
FEMALE WC .6
FEMALE LAV. .6
SHOWERS .75

SEPARATE FACILITIES NOT REQUIRED PER SECTION 2902.2
SEPARATE FACILITIES EXCEPTION #1

OCCUPANT LOAD
S1

1/100 WATER CLOSETS REQUIRED MALE & FEMALE
1/100 LAVATORIES REQUIRED

OCCUPANTS = 26 (13 MEN & 13 WOMEN)

REQUIRED
MALE WC .26
MALE LAV. .26
FEMALE WC .26
FEMALE LAV. .26


TOTAL PLUMBING FIXTURES REQUIRED:

TOTAL OCCUPANT LOAD COMBINED = 32

R3 1/100 DRINKING FOUNTAINS REQUIRED
S1 1/1000 DRINKING FOUNTAINS REQUIRED
1 SERVICE SINK REQUIRED

REQUIRED PROVIDED

UNISEX WC 1 4
UNISEX LAV. 1 4
SHOWERS 1 3
DRINKING FOUNTAIN 1 1
SERVICE SINK 1 2

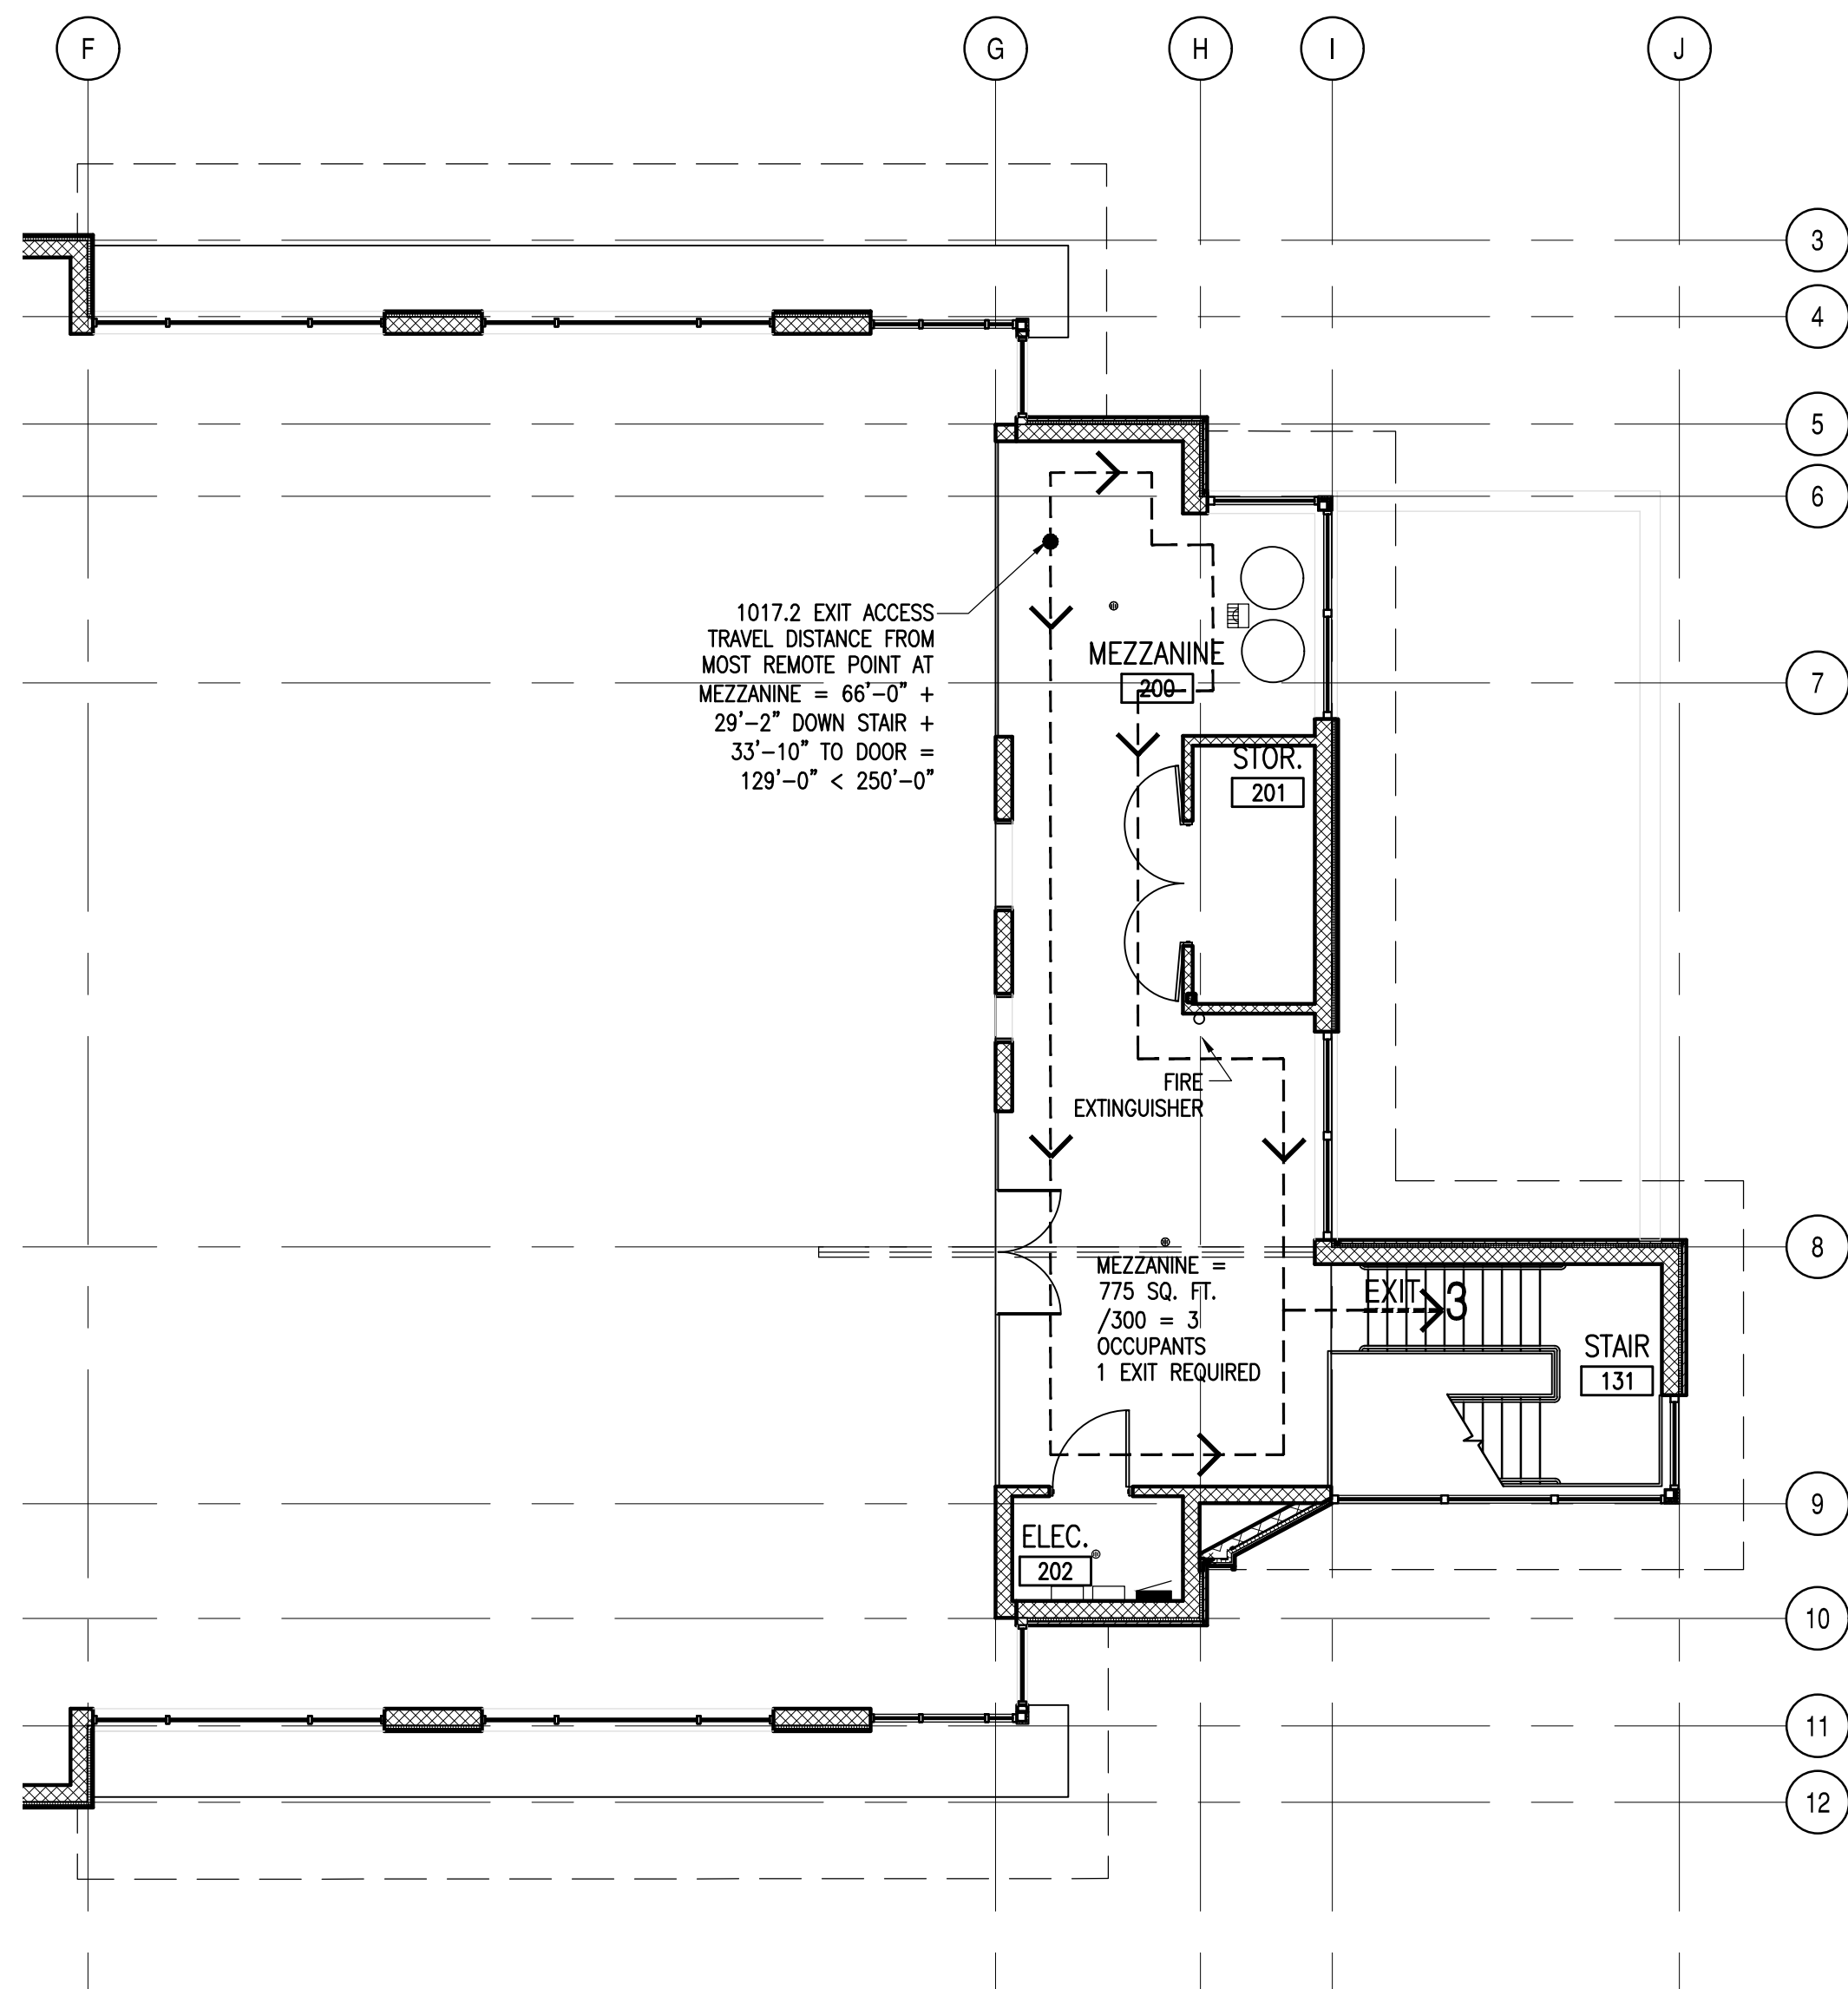


1 MEZZANINE CODE PLAN
SCALE: 1/8"=1'-0"

GENERAL NOTES

1. REFER TO CIVIL DRAWINGS FOR GRADING PLAN, UTILITY PLANS AND FOR HORIZONTAL CONTROL LOCATIONS, WHICH WILL BE PROVIDED BY CIVIL ENGINEER BY CAD FILES FOR SURVEYOR COORDINATION.
2. THE CONTRACTOR SHALL PREVIEW CONDITIONS AND REVIEW THE APPLICABLE GEOTECHNICAL ENGINEERING REPORT. FAILURE TO DO SO WILL NOT ELIMINATE RESPONSIBILITY TO PERFORM THE REQUIREMENTS OF THE GEOTECHNICAL REPORT.
3. IT IS THE CONTRACTORS RESPONSIBILITY TO VERIFY LOCATIONS OF ALL EXISTING UTILITIES BEFORE PROCEEDING WITH EXCAVATIONS. CALL UTILITY NOTIFICATION CENTER OF COLORADO AT 1.800.922.1987. ANY CONFLICTS ARE TO BE COORDINATED WITH ARCHITECT.
4. ALL GRADING AND CONCRETE PAVING SHALL SLOPE AWAY FROM BUILDING.
5. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO MAINTAIN ADEQUATE DRAINAGE THROUGHOUT THE SITE DURING THE PROCESS OF EXCAVATION AND GRADING. THE GRADE SHALL BE MAINTAINED IN SUCH CONDITION THAT IT IS WELL DRAINED AT ALL TIMES.
6. THE IRRIGATION SUBCONTRACTOR SHALL COORDINATE THE LOCATION OF ALL IRRIGATION PIPES WITH THE GENERAL CONTRACTOR PRIOR TO PAVING & CONSTRUCTION ACTIVITIES. SLEEVES SHALL BE PROVIDED AND INSTALLED BY THE IRRIGATION SUBCONTRACTOR. IRRIGATION DESIGN TO BE IN CONFORMANCE WITH THE REQUIREMENTS OF THE LOCAL MUNICIPAL JURISDICTION.
7. THE CONTRACTOR IS TO INSPECT ALL IRRIGATION LINES WITH PRESSURE TESTS PRIOR TO BACK FILL - PROVIDE INSPECTION RESULTS TO THE ARCHITECT AND THE OWNER. THE CONTRACTOR IS TO TEST THE IRRIGATION SYSTEM AFTER THE LANDSCAPE IS INSTALLED FOR LEAKS.
8. THE CONTRACTOR IS TO PROVIDE OR COORDINATE ELECTRICAL SLEEVES UNDER PAVEMENT FOR ALL ELECTRICAL FIXTURES.
9. ALL UNDERGROUND UTILITIES SHALL BE TESTED AND VERIFIED IN THE FIELD PRIOR TO BACKFILLING OR COVERING. TEST FOR LEAKS AND CONTINUITY. PROVIDE WRITTEN VERIFICATION TO THE ARCHITECT AND THE OWNER AS EACH UTILITY IS Laid PRIOR TO COVERING THAT UTILITY. VERIFY ALL DRAIN SLOPES PRIOR TO EXCAVATION AND TRENCHING. NOTIFY THE ARCHITECT OF ANY CONFLICTS WITH ELEVATIONS AND ABILITY TO DAYLIGHT PROPERLY AT SPECIFIED LOCATIONS. SUCH VERIFICATION SHALL INCLUDE BUT NOT BE LIMITED TO: DRAIN PIPES, SEWER LINES, WATER LINES, GAS LINES, CONDUIT FOR ELEC., TELEPHONE, AND CABLE.
10. THE CONTRACTOR IS TO SHOOT WITH A TRANSIT OR EQUIPMENT ACCEPTABLE FOR MEASURING HORIZONTAL SLOPES CURB AND GUTTER FORM WORK, PIPE DRAINAGE, FINISH GRADE, AND PARKING LOT SUBGRADE TO VERIFY PROPER GRADING AND DRAINAGE. PROVIDE SURVEY RESULTS TO ARCHITECT AND OWNER.
11. PROVIDE SEALANT AT ALL COLD JOINTS INCLUDING, BUT NOT LIMITED TO, JOINTS BETWEEN CURB & SIDEWALK, GUTTER & CONCRETE PAVING AND EXPANSION JOINTS IN CONC. PAVING.
12. ALL SITE WORK, SITE CLEARING, EARTH WORK, WATER DISTRIBUTION, ETC. SHALL BE COMPLETED IN ACCORDANCE WITH THE PROJECT MANUAL AND OR WRITTEN CLARIFICATIONS BY THE ARCHITECT AS REQUIRED TO COMPLETE THE INTENT AS SHOWN ON THE CONTRACT DOCUMENTS. EACH SITE WORK SHALL BE REVIEWED BY THE TESTING ENGINEER AS SELECTED BY THE OWNER. FIELD REPORTS OF THE SAME SHALL BE ISSUED IMMEDIATELY AFTER THE FIELD INSPECTION AND SHALL BE COMPILED IN THE AS BUILT SETS OF DRAWINGS, AND SHALL BE DISTRIBUTED TO THE ARCHITECT AND OWNER.
13. CONTRACTOR TO PROVIDE QC TESTING FOR ALL SOILS, CONC., FASTENERS, REBAR, WELDS, ETC.
14. ADJACENT STREETS AND PARKING AREA SHALL BE KEPT FREE OF MUD AND DEBRIS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVAL OF MUD AND DEBRIS AT THE END OF EACH DAY. REFER TO CIVIL DRAWINGS FOR VEHICLE TRAFFIC CONTROL LOCATIONS.
15. THE CONTRACTOR SHALL PROTECT EXISTING IMPROVEMENTS TO REMAIN FREE FROM DAMAGE. DAMAGED ITEMS SHALL BE REPLACED, REPAIRED, OR RESTORED BY THE CONTRACTOR AT NO COST TO THE OWNER. IF, IN THE OPINION OF THE CONTRACTOR, EXISTING IMPROVEMENTS TO REMAIN WILL BE DAMAGED OR REQUIRE REMOVAL THE GENERAL CONTRACTOR IS TO INCLUDE THE COST OF REPAIR OR REPLACEMENT IN BASE BID.
16. ADA PARKING SIGNS AND INSTALLATION TO BE APPROVED BY THE LOCAL MUNICIPAL JURISDICTION TO THEIR MINIMUM STANDARDS.
17. CROSS SLOPE OF SIDEWALKS NOT TO EXCEED 2%.
18. THE CONTRACTOR SHALL NOTIFY THE CITY INSPECTOR AT LEAST 24 HOURS PRIOR TO THE DESIRED INSPECTION.
19. THE PLACEMENT OF EROSION AND SEDIMENT CONTROL BEST MANAGEMENT PRACTICES (BMPs) SHALL BE IN ACCORDANCE WITH THE LOCAL MUNICIPAL JURISDICTION.
20. NO CONCRETE SHALL EXCEED 15' X 15' WITHOUT EXPANSION JOINTS. COORD W/ ARCHITECT.

1 SITE PLAN
1"=20'-0"

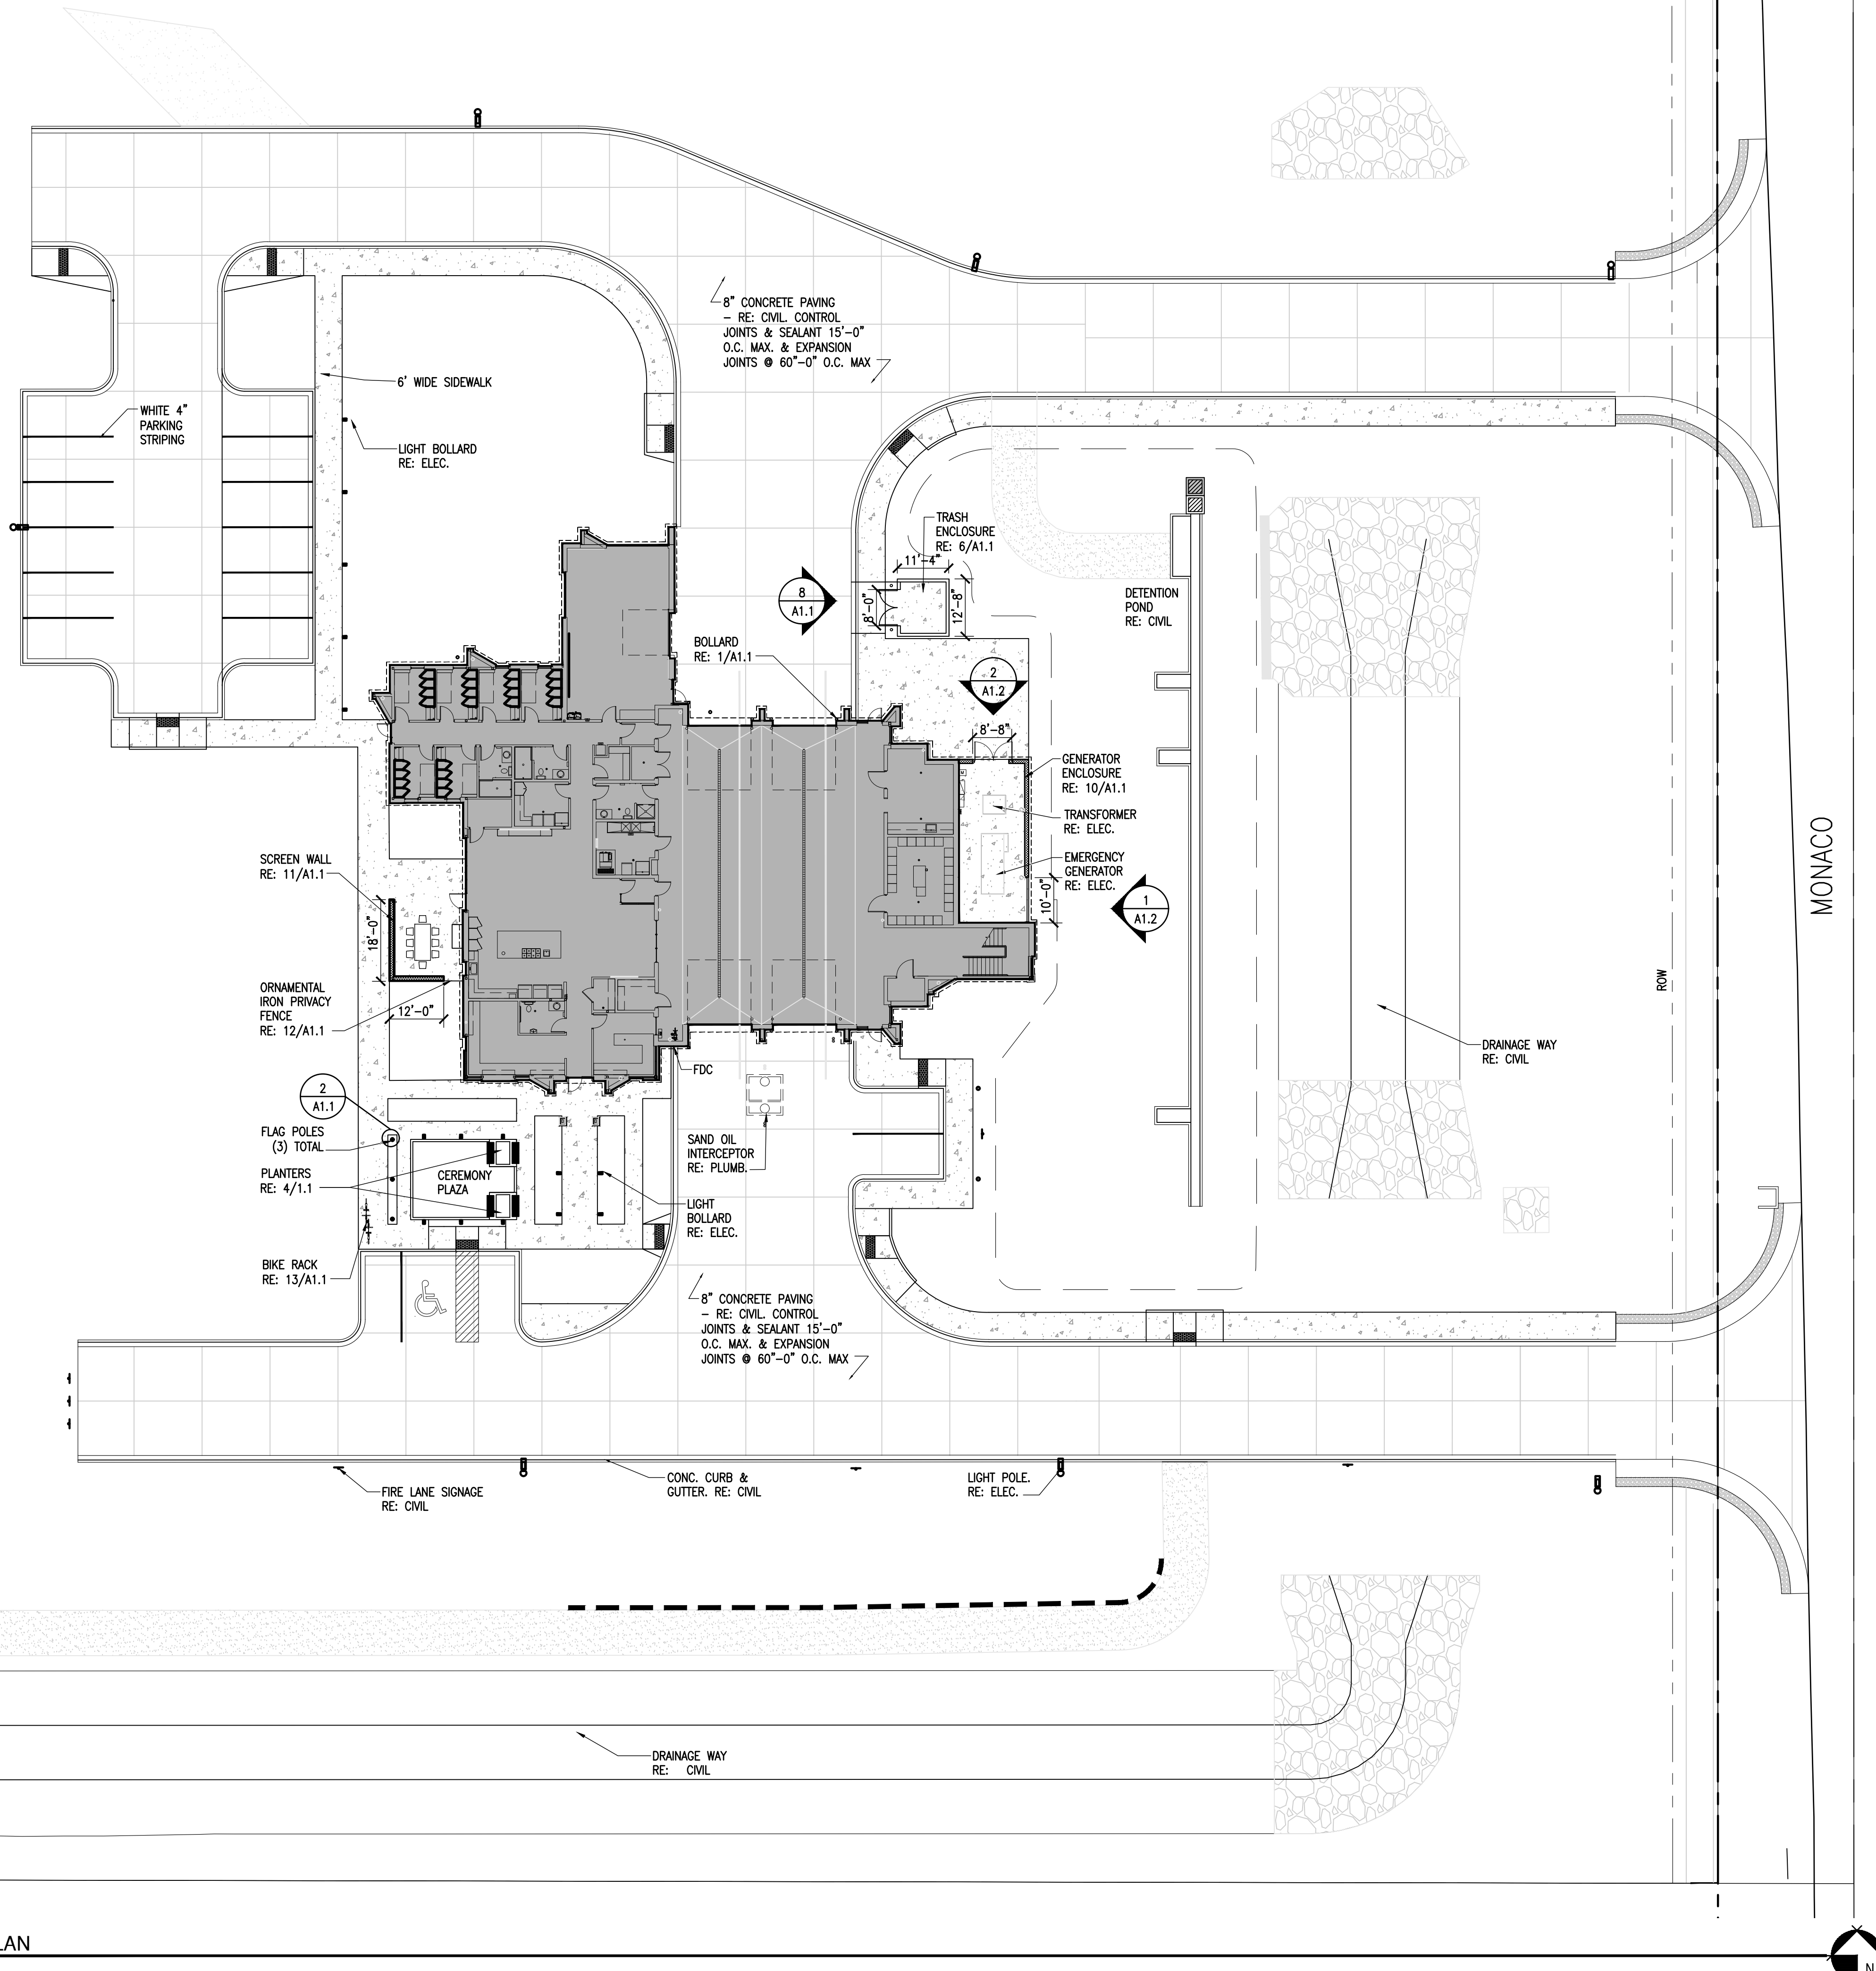

CITY OF THORNTON
FIRE STATION #8
15343 MONACO STREET
THORNTON, COLORADO 80602

ALLRED & ASSOCIATES

ARCHITECTURE | PLANNING | INTERIOR DESIGN

589 BURBANK STREET, SUITE 125, BROOMFIELD, COLORADO 80020
PHONE: 303.465.4306
WWW.ALLREDARCH.COM

BID SET


• JOB NO. 2309

REVISION NAME	DATE


ISSUE DATE: 2024 0927

SITE PLAN

A1.0

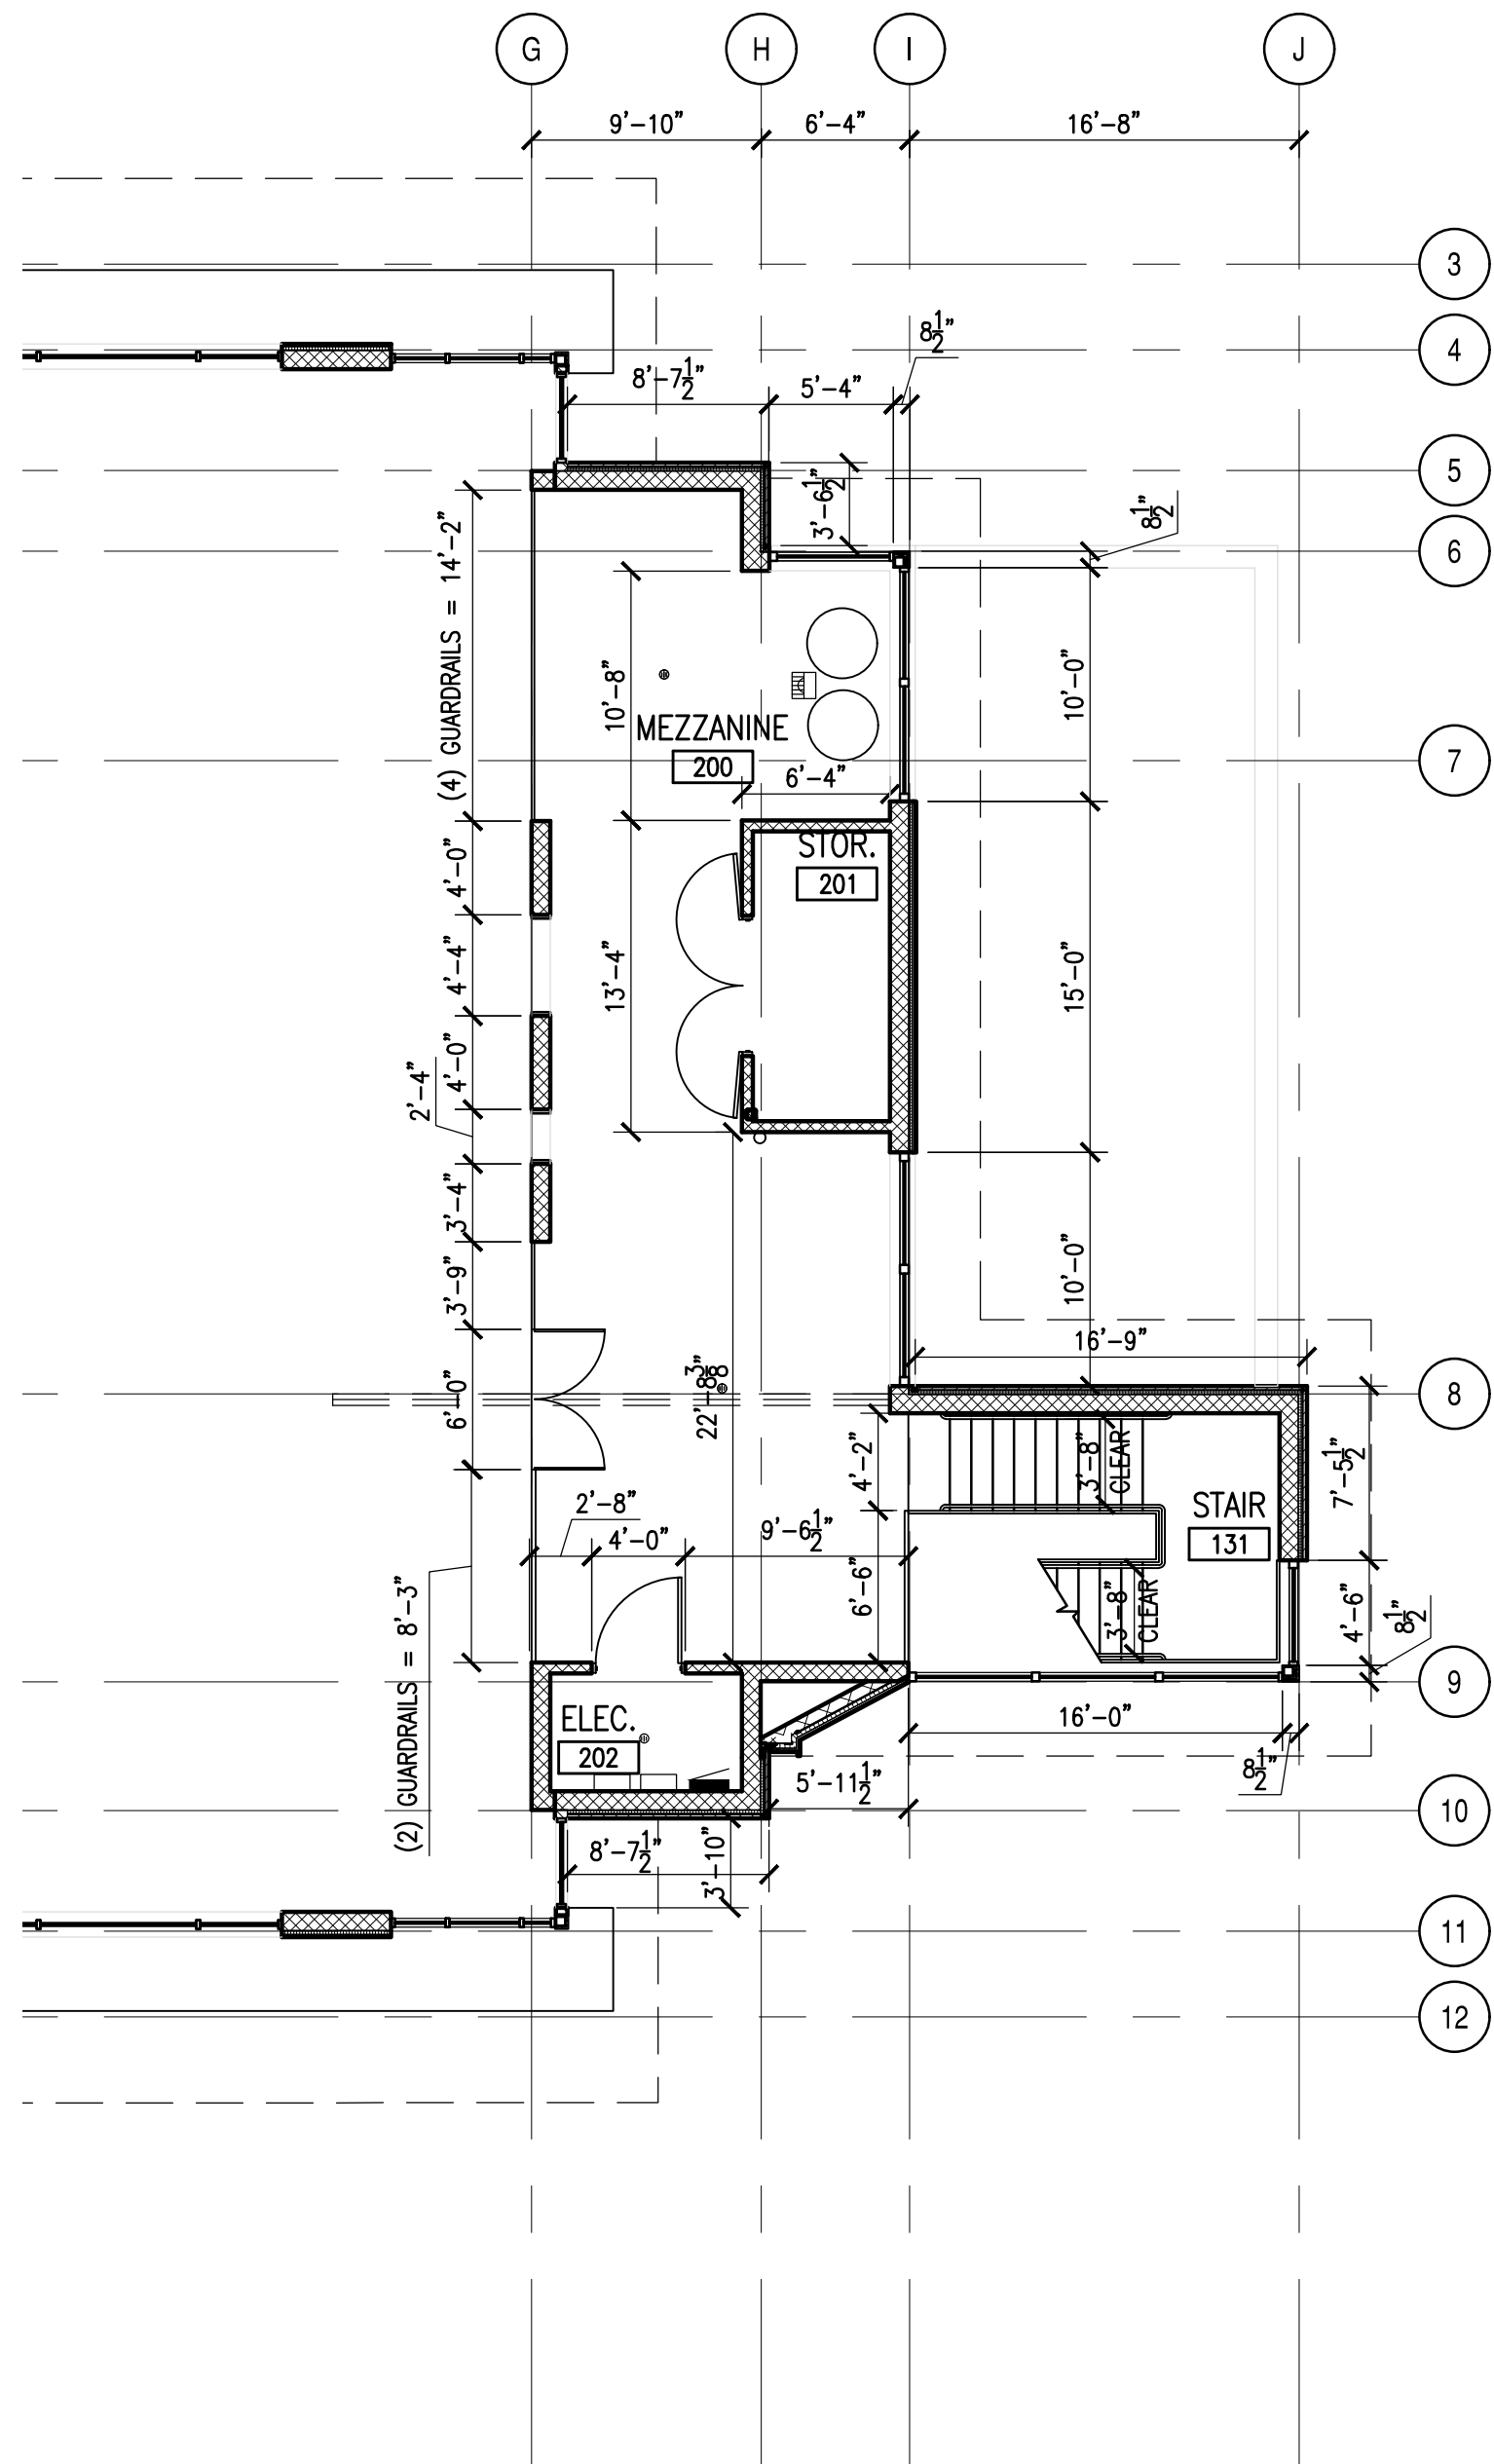

1 MEZZANINE DIMENSION PLAN
SCALE: 1/8"=1'-0"

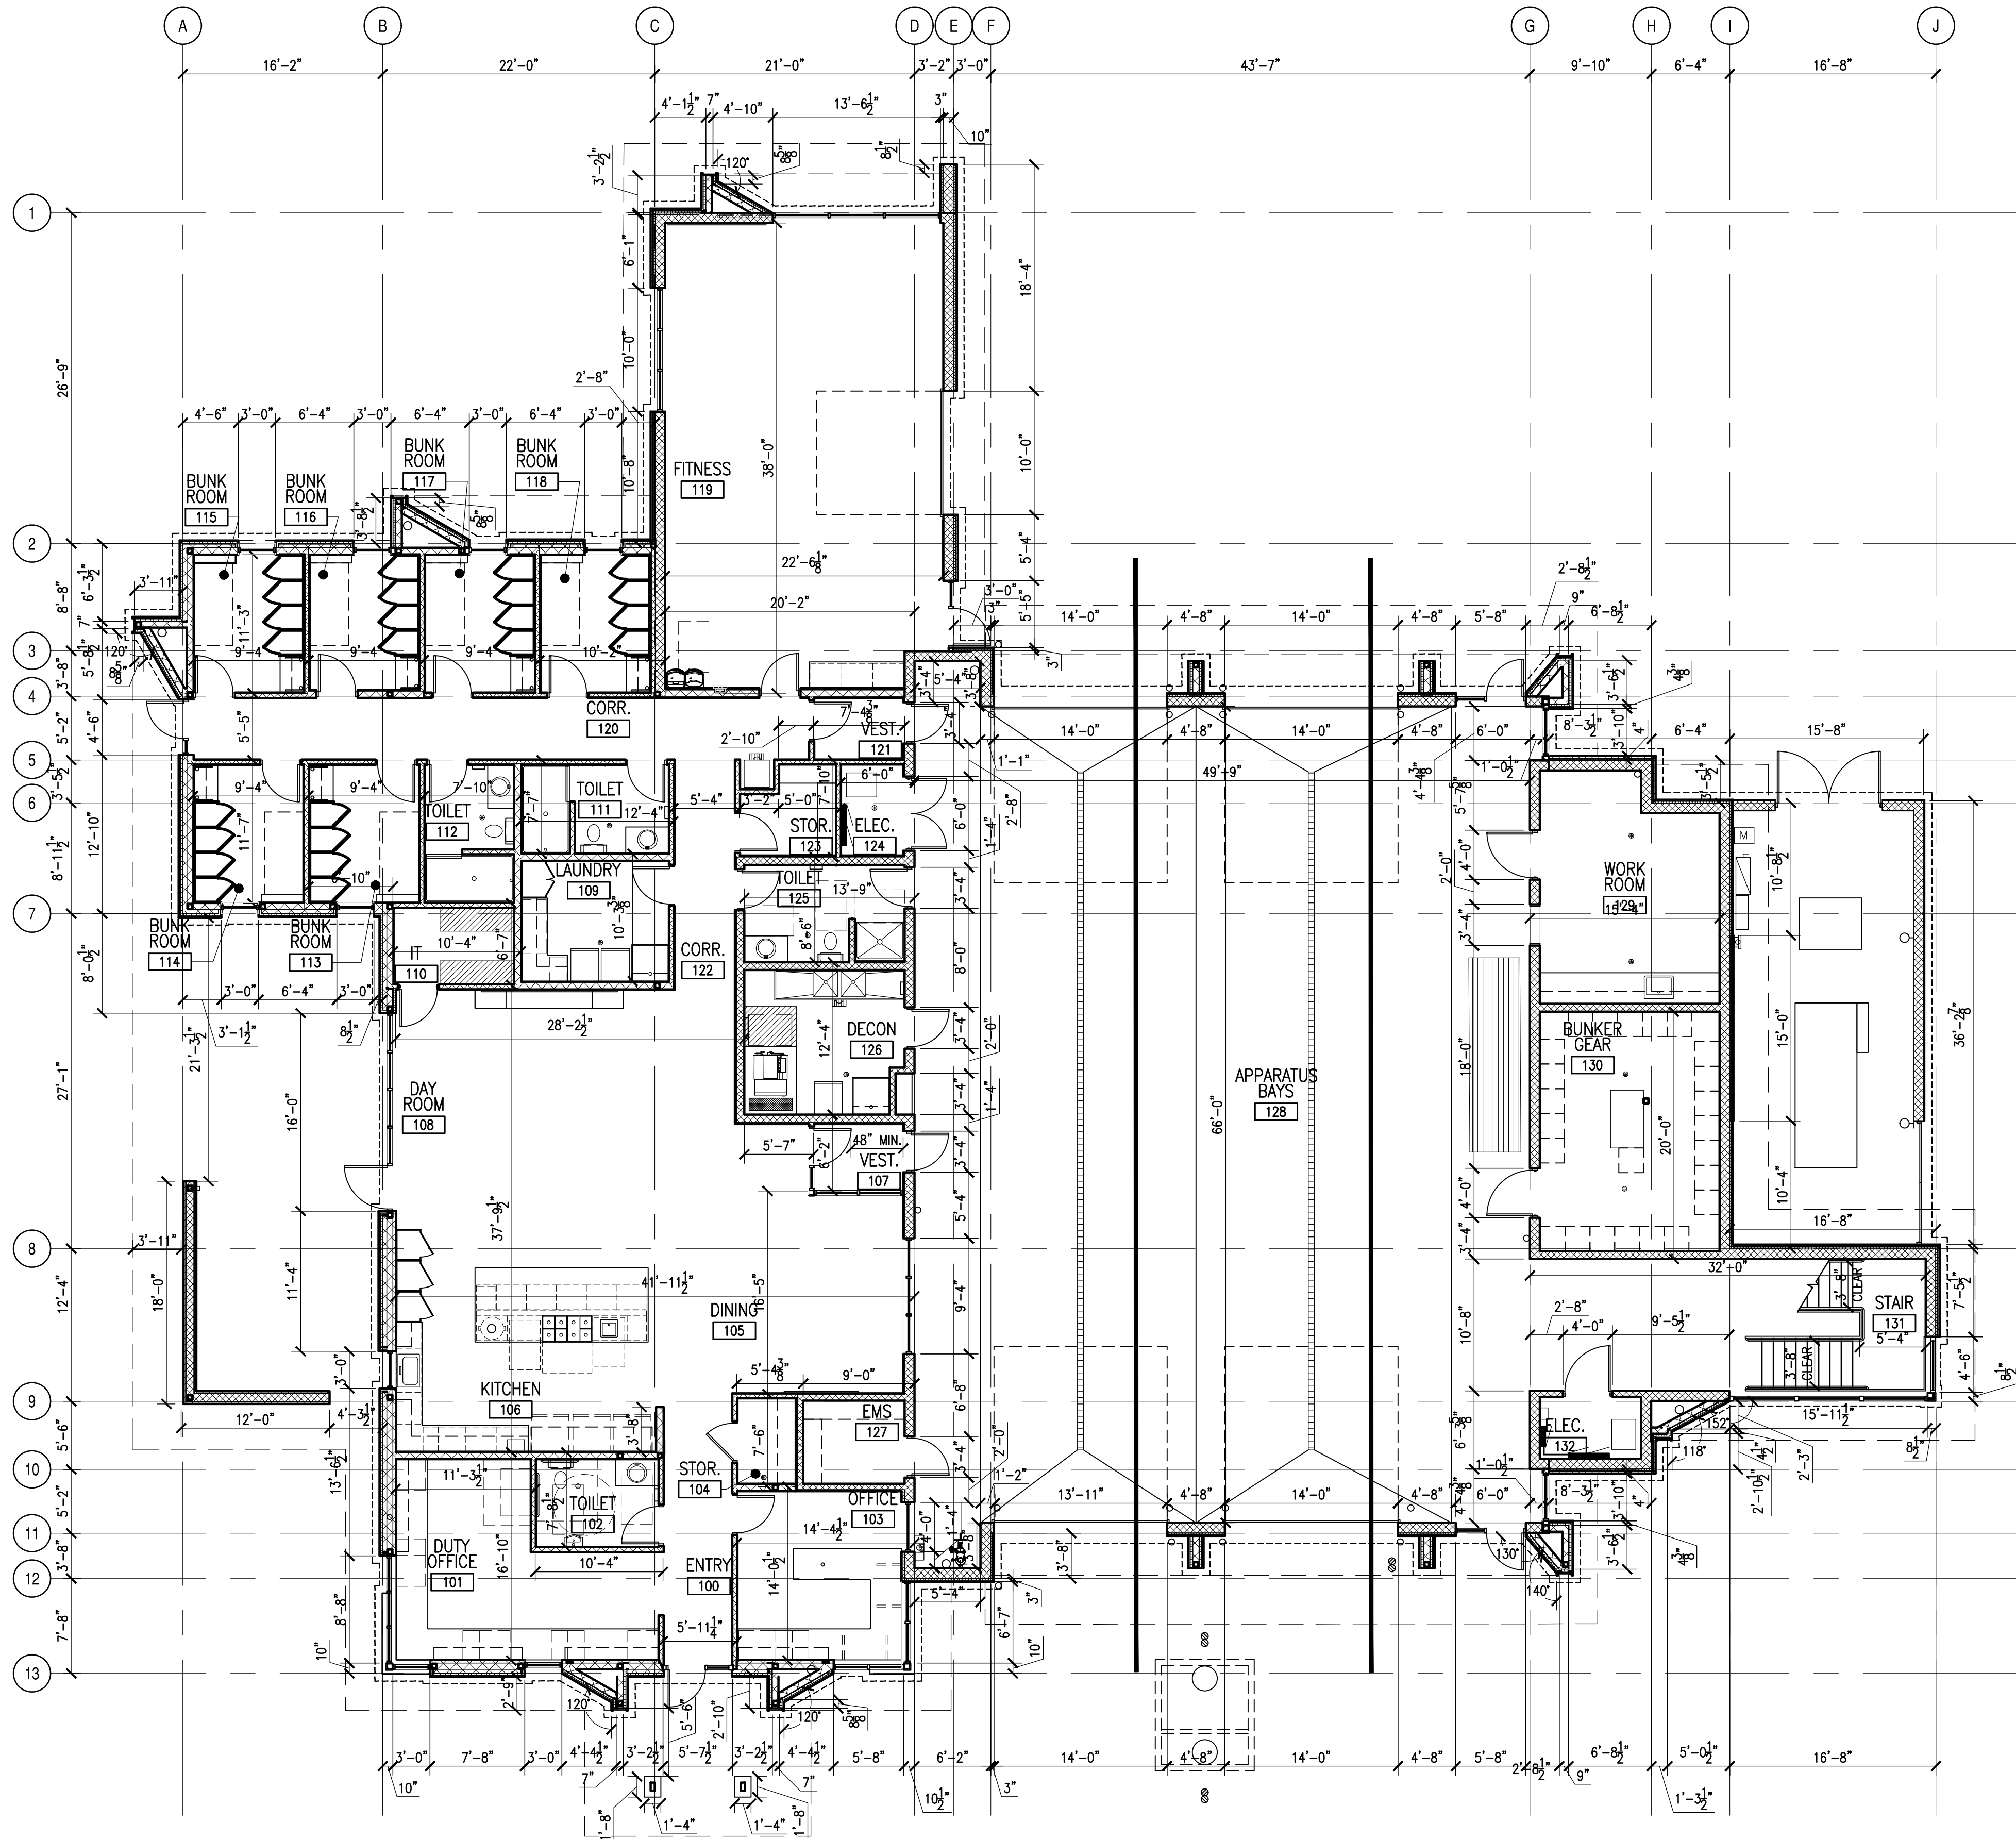

1 MAIN LEVEL DIMENSION PLAN
SCALE: 1/8"=1'-0"

CITY OF THORNTON
FIRE STATION #8
15343 MONACO STREET
THORNTON, COLORADO 80602

ALLRED & ASSOCIATES

ARCHITECTURE | PLANNING | INTERIOR DESIGN

589 BURBANK STREET, SUITE 125, BROOMFIELD, COLORADO 80020

PHONE: 303.465.4306

www.allredarch.com

• JOB NO. 2309


BID SET

REVISION NAME		DATE


ISSUE DATE: 2024 0927

DIMENSION
PLANS

A2.0

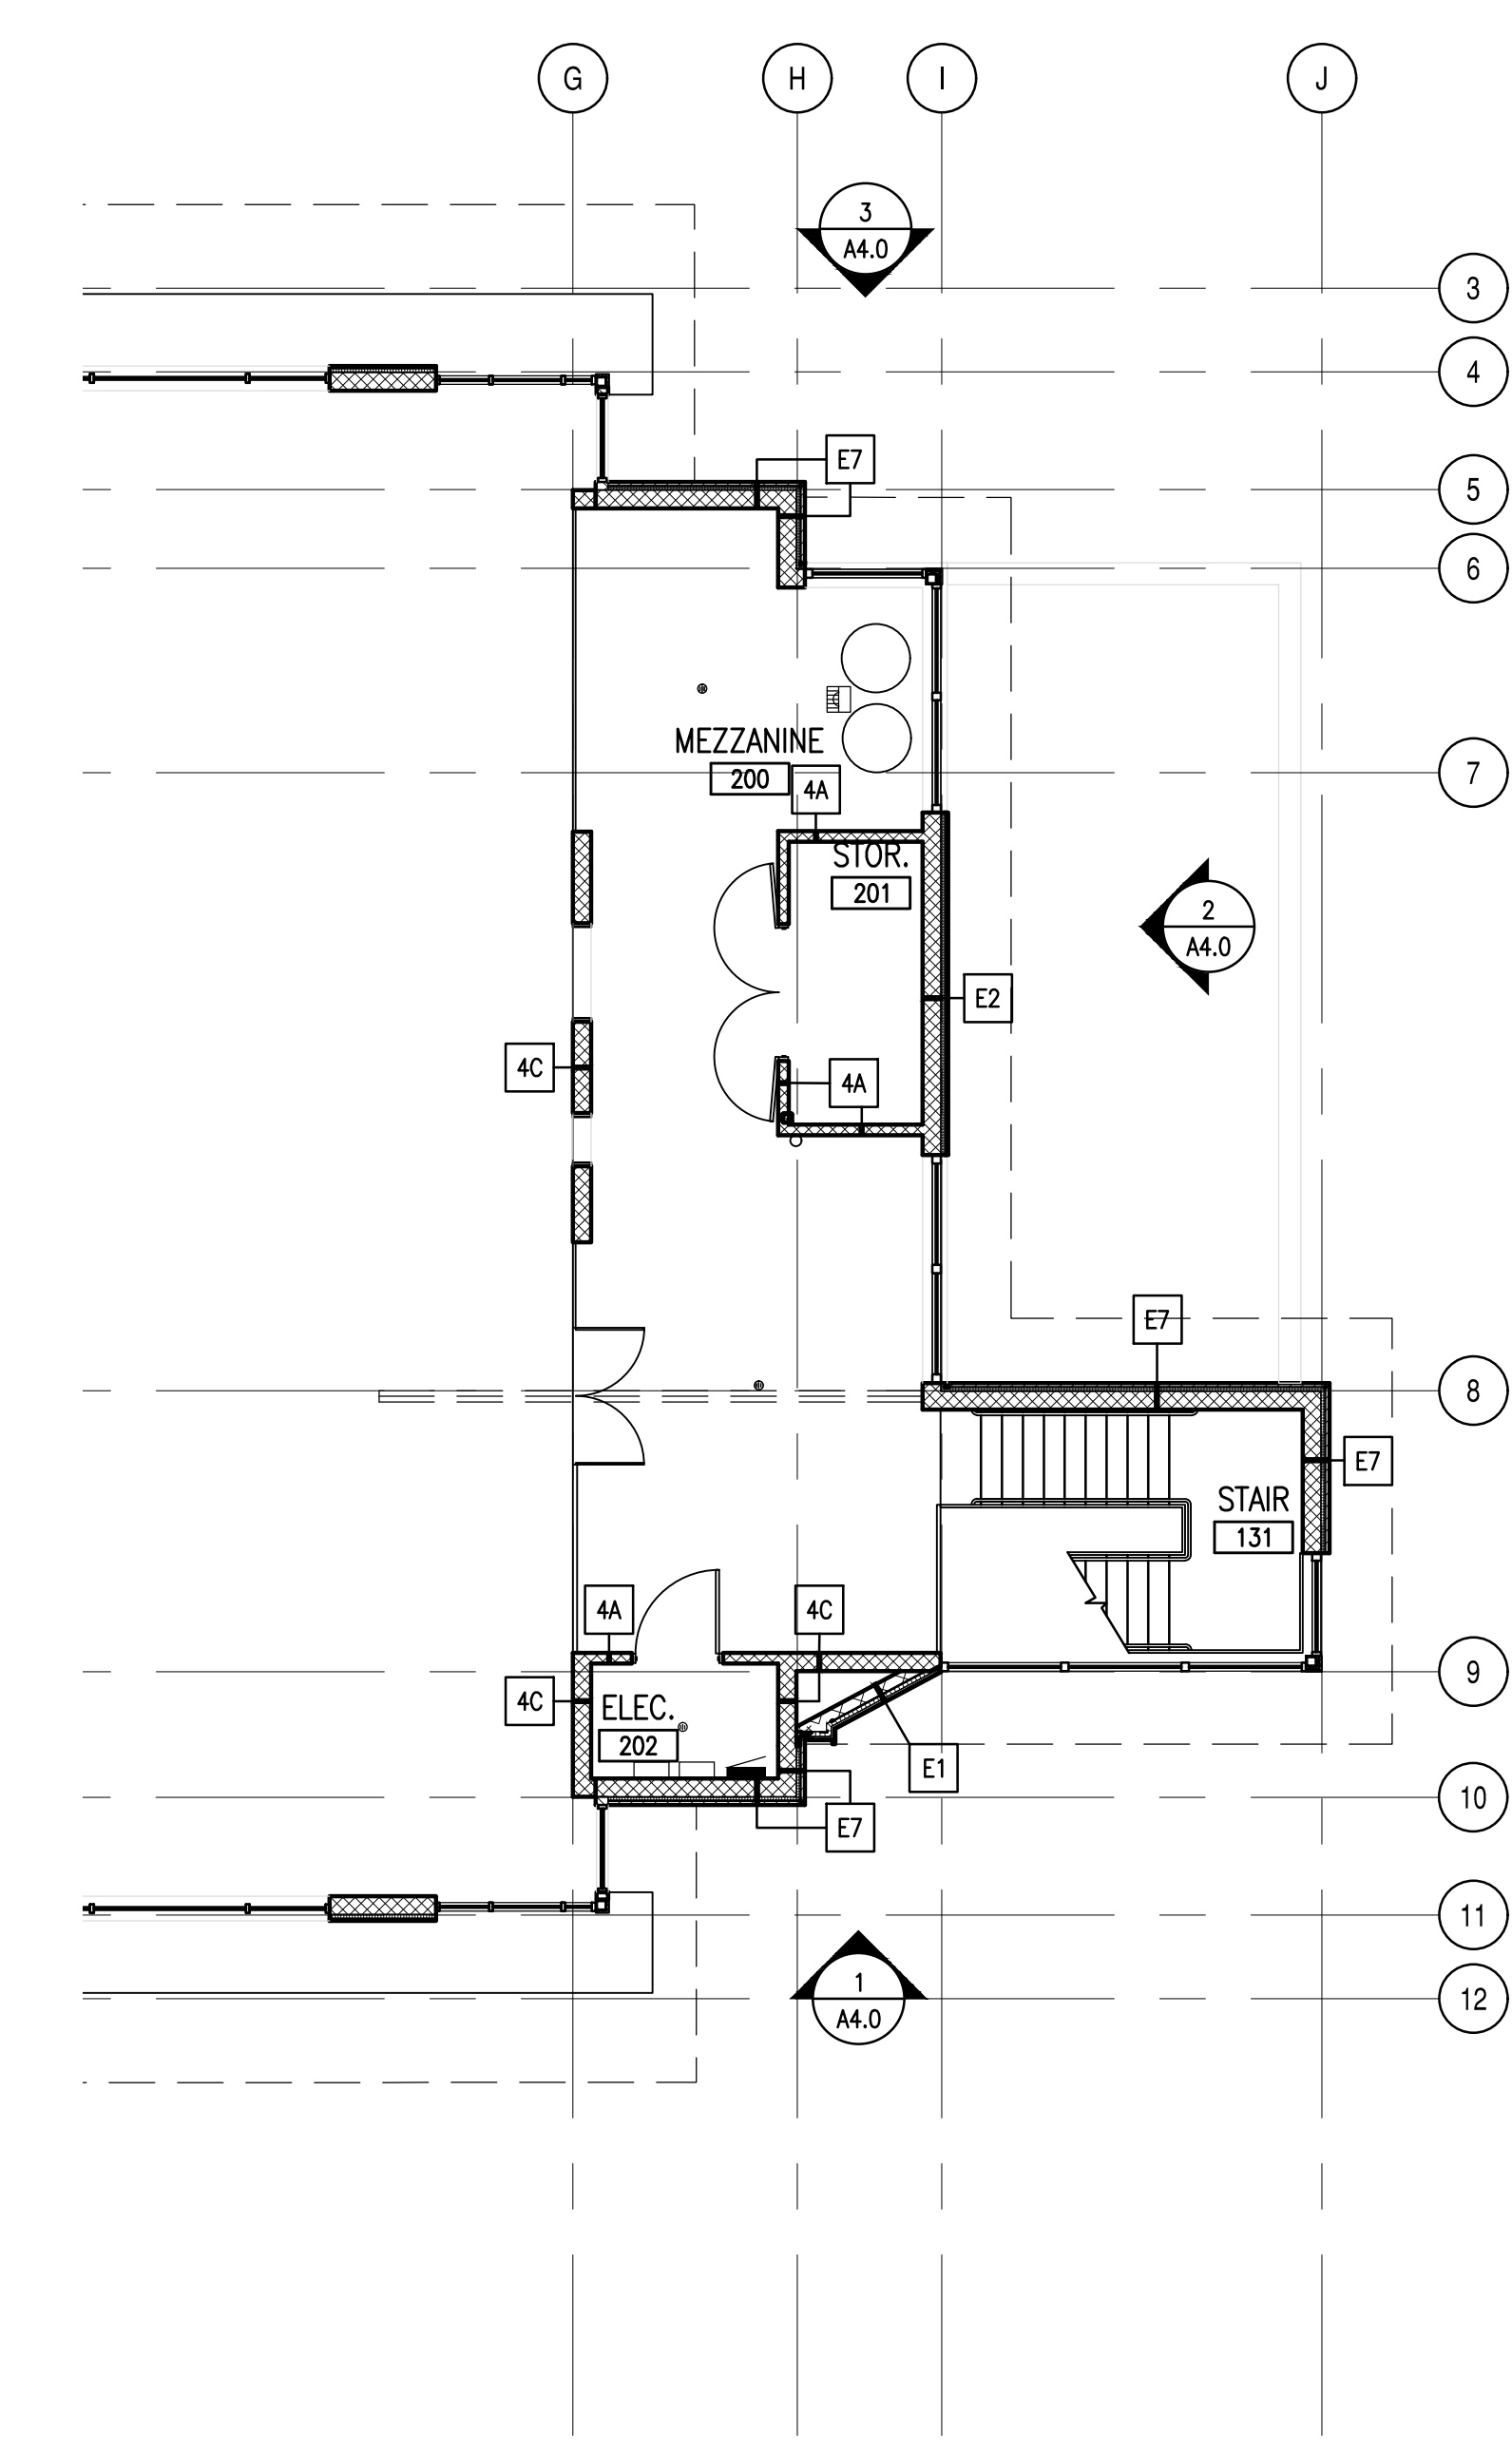

1 MEZZANINE WALL TYPE PLAN
SCALE: 1/8"=1'-0"

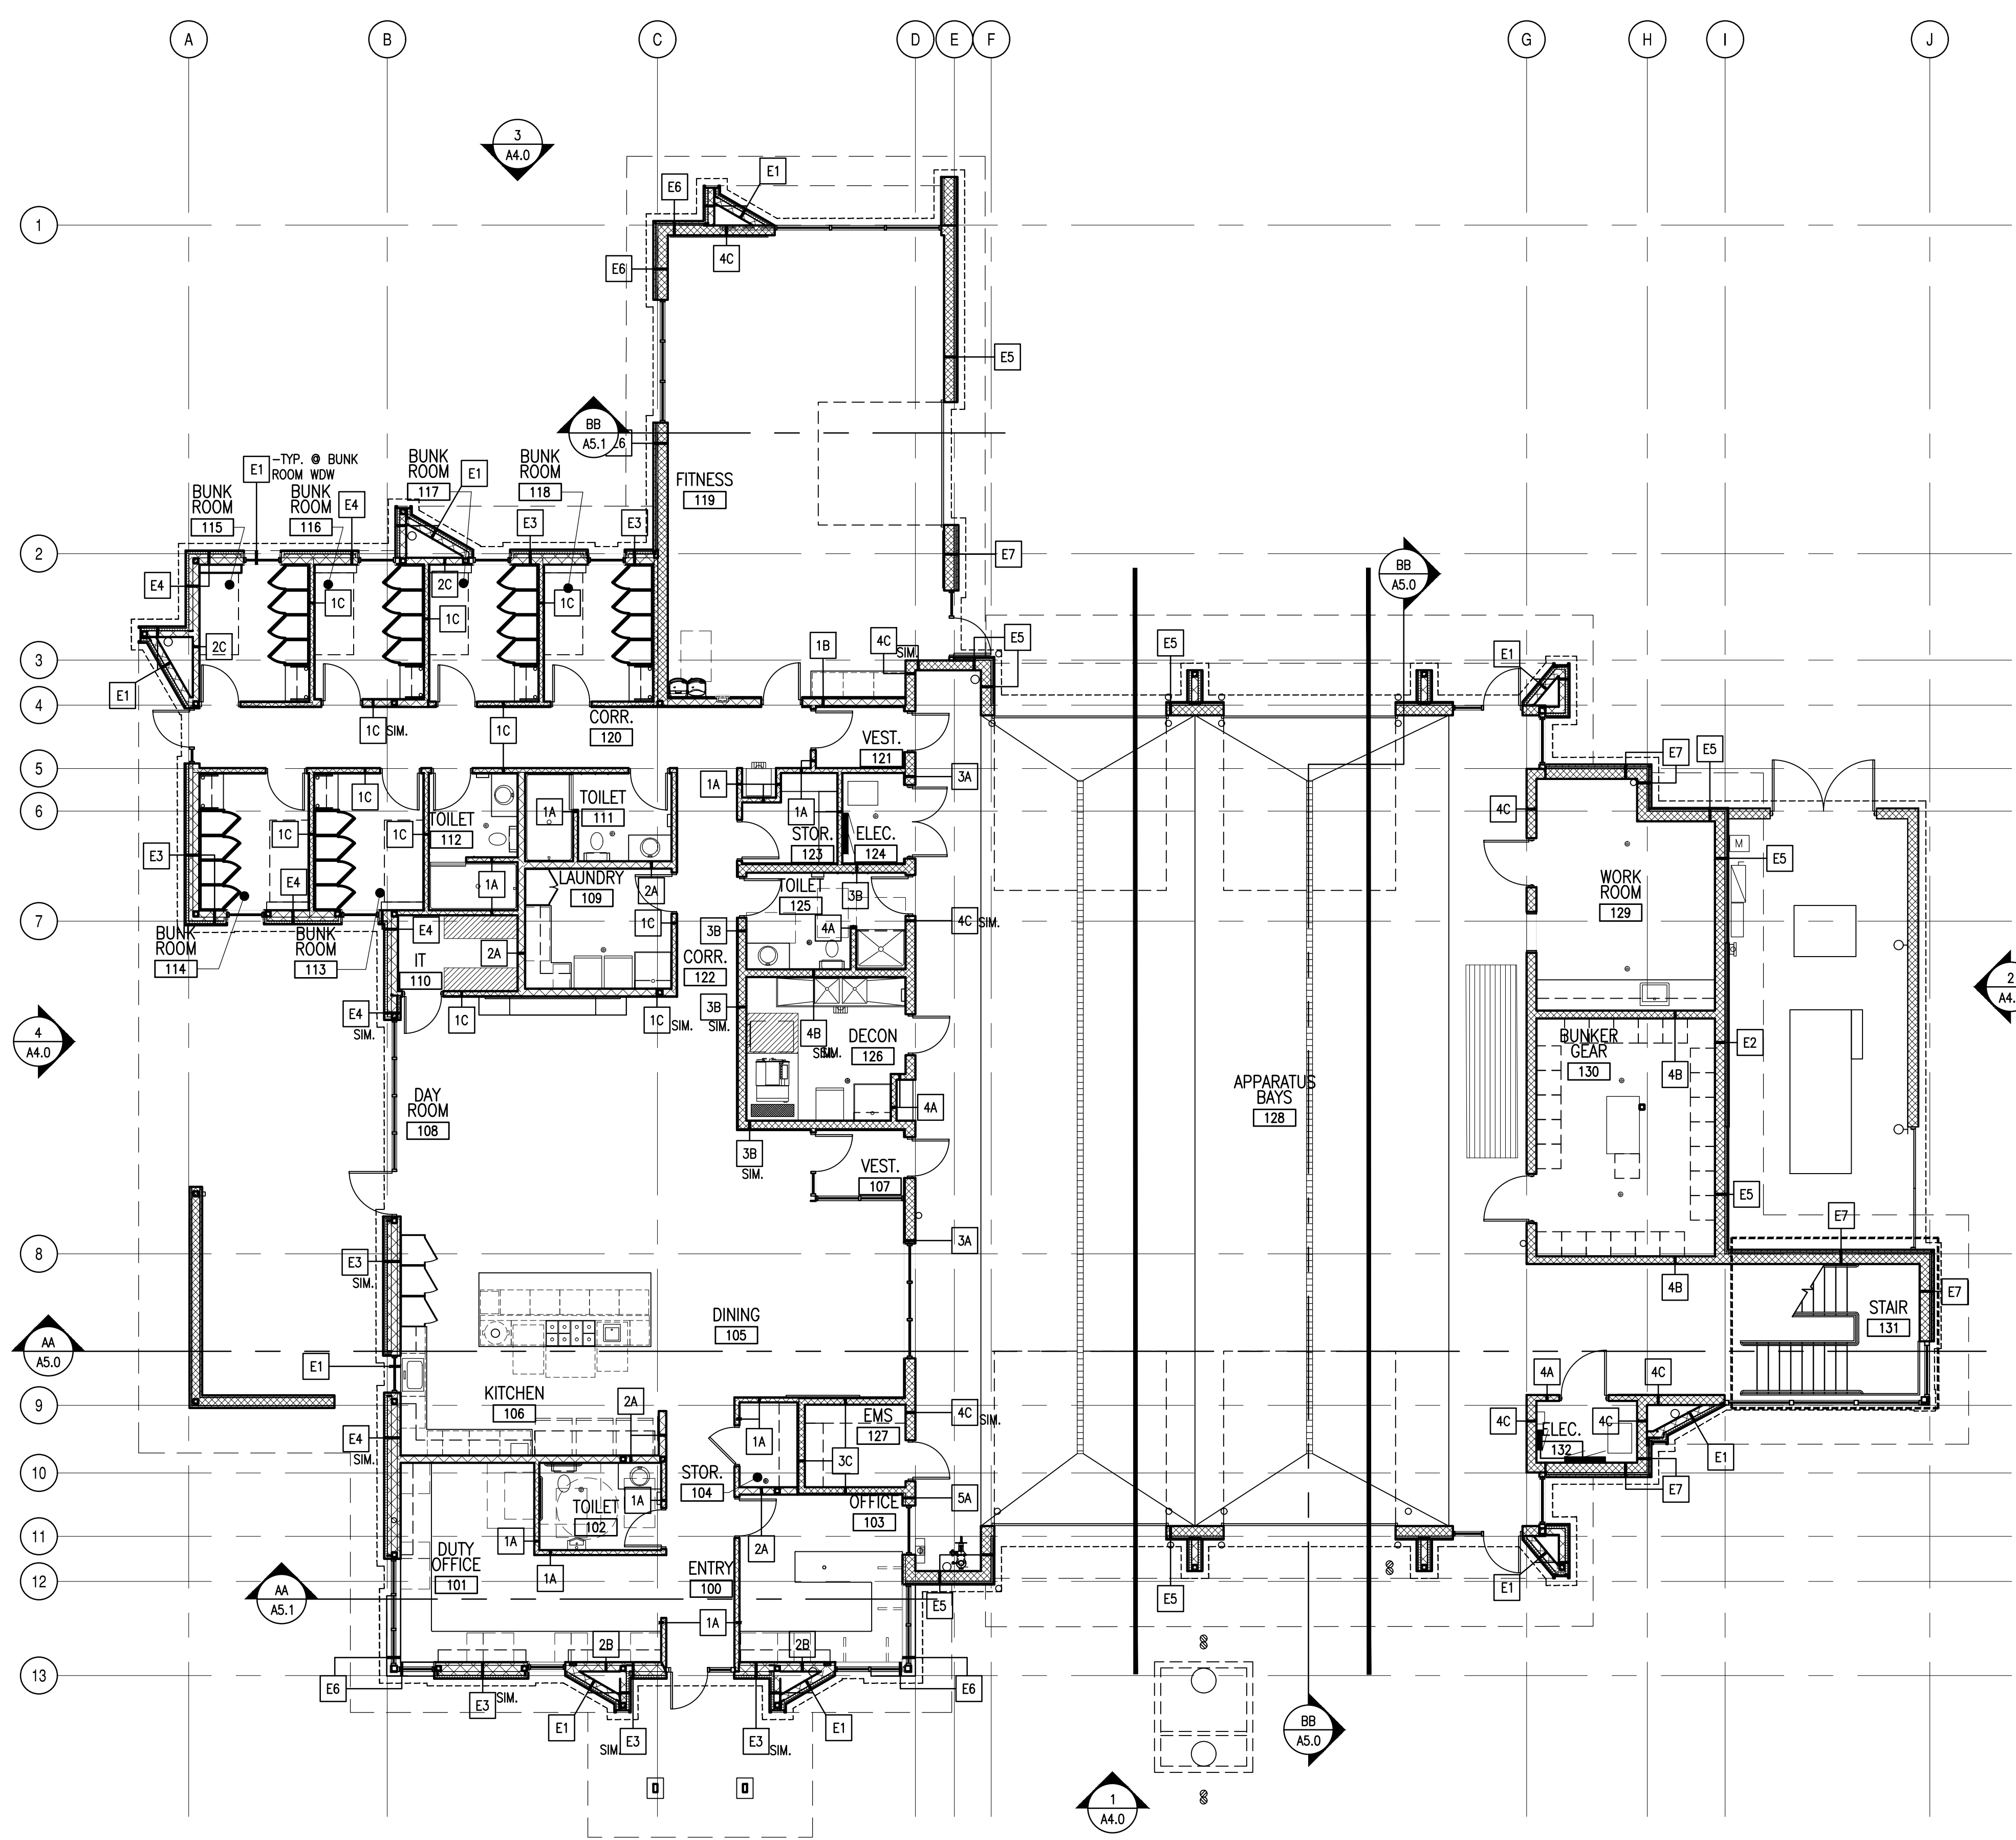

1 MAIN LEVEL WALL TYPE PLAN
SCALE: 1/8"=1'-0"

CITY OF THORNTON
FIRE STATION #8
15343 MONACO STREET
THORNTON, COLORADO 80602

ALLRED & ASSOCIATES
ARCHITECTURE | PLANNING | INTERIOR DESIGN
589 BURBANK STREET, SUITE 125, BROOMFIELD, COLORADO 80020
PHONE: 303.465.4306
WWW.ALLREDARCH.COM

• JOB NO. 2309

BID SET

REVISION NAME	DATE

ISSUE DATE: 2024.0927

WALL TYPE
FLOOR PLANS


A2.1

GENERAL NOTES

- DO NOT SCALE DRAWINGS. FIELD VERIFY ALL DIMENSIONS. NOTIFY ARCHITECT IMMEDIATELY WHEN DISCREPANCIES ARE DISCOVERED WITH THE DRAWINGS OR SPECIFICATIONS PRIOR TO BID.
- IT IS THE RESPONSIBILITY OF THE MECHANICAL, PLUMBING, & ELECTRICAL SUBCONTRACTORS TO REVIEW ALL OF THE DRAWINGS, INCLUDING ARCHITECTURAL, FOR WORK UNDER THEIR RESPECTIVE CONTRACTORS. ROOF PLANS AND REFLECTED CEILING PLANS DESCRIBE MECHANICAL, PLUMBING & ELECTRICAL WORK AS DO OTHER DRAWINGS. NO EXTRAS WILL BE ALLOWED FOR WORK SHOWN IN ANY PART OF THESE DRAWINGS, OR DESCRIBED IN ANY PART OF THE SPECIFICATIONS.
- THE GENERAL CONTRACTOR IS TO FIELD VERIFY ALL DIMENSIONS. NOTIFY ARCHITECT & OWNER IF ANY DISCREPANCIES THAT MAY OCCUR. DIMENSIONS ARE FROM FACE OF STUD, FACE OF MASONRY OR FACE OF CONCRETE FOUNDATION. WHERE DIMENSION IS NOTED "CLEAR", DIMENSION IS TO FINAL FINISH. ALL EXTERIOR DIMENSIONS ARE TO OUTSIDE FACE OF FOUNDATION WALL.
- REFER TO STRUCTURAL DRAWINGS FOR ALL INTERIOR CMU CONTROL JOINTS AND INTERIOR CONCRETE FLOOR SLAB CONTROL JOINTS.
- CONTRACTOR TO PROVIDE ALL REQUIRED FIRE SAFING AT RATED ASSEMBLIES.
- PROVIDE BLOCKING AT ALL ACCESSORIES & AT ALL WINDOWS.
- SEE A9.1 FOR WALL TYPES **1A**.
- CONTRACTOR TO PROVIDE ROLLER SHADES AT WINDOWS AS INDICATED PER SPEC. PROVIDE BLACKOUT ROLLER SHADES AT BUNK ROOMS. RE: SPEC.
- REFER TO CIVIL DRAWINGS FOR GRADING AND HORIZONTAL CONTROL INFORMATION.
- ALL WORK SHALL CONFORM TO ALL APPLICABLE CODES.
- MAINTAIN THE BUILDING IN A WEATHER TIGHT CONDITION DURING CONSTRUCTION.
- MAINTAIN THE SITE IN A SAFE CONDITION TO THE PUBLIC. FENCE OFF AND POST PRECAUTIONARY SIGNS AS NEEDED.
- WATERPROOF ALL UTILITY PENETRATIONS INTO BUILDING.
- CONTRACTOR TO COORD. INSTALLATION OF SECURITY, ACCESS CONTROL AV, VEHICLE EXHAUST & FIRST-IN ALERT SYSTEMS W/ OWNERS SUB-CONTRACTORS.
- ALL DRAIN SYSTEMS SHALL BE TESTED AND APPROVED PRIOR TO BACKFILLING AND/OR COVERING UP THE DRAIN SYSTEM.
- PROVIDE HOUSEKEEPING PADS AT FURNACES, CONDENSING UNITS, TRANSFORMER AND EMERGENCY GENERATOR.
- TOILET ROOM & KITCHEN ACCESSORIES & APPLIANCES THAT ARE BY OWNER ARE TO BE INSTALLED BY CONTRACTOR. CONTRACTOR TO COORDINATE LOCATIONS WITH OWNER & PROVIDE BLOCKING IN WALL AS REQUIRED.
- CONTRACTOR TO PROVIDE BLOCKING IN WALLS FOR DRY ERASE BOARDS BY OWNER. COORDINATE LOCATIONS WITH OWNER.


DOOR NOTES AND LEGEND:

- PROVIDE 1/2" CLEAR BETWEEN BOTTOM OF DOOR AND FLOOR FINISH OR THRESHOLD UNLESS OTHERWISE NOTED.

DOOR TYPE  DOOR NUMBER
HARDWARE GROUP

FLOOR PLAN NOTES

- PROVIDE FRAMING & 3/4" PLYWD BACKING BETWEEN STUDS AT TV LOCATIONS IN OFFICES, DAY ROOM, FITNESS & BUNK ROOMS. COORDINATE LOCATIONS WITH OWNER. PROVIDE CONCRETE ANCHORS AT CMU LOCATIONS.
- PROVIDE CEMENTITIOUS BACKERBOARD AT ALL WALL TILE LOCATIONS.
- PROVIDE HIGH IMPACT GYP. BD. AT FITNESS 119 WALLS.
- PROVIDE 12" HIGH CONCRETE PAD AT OWNER PROVIDED BUNKER GEAR WASHER. COORDINATE FINAL SIZE AND LOCATION WITH OWNER.
- CONTRACTOR TO COORDINATE ALL WALL BOXES WITH SOUND & FIRE RATED WALL ASSEMBLIES. RE: 6/A9.0
- (5) 18" (D) ADJUSTABLE MELAMINE SHELVES W/ 6" (H) WALL BRACKET.
- MAP BY OWNER. COORD. EXACT SIZE W/ OWNER. PROVIDE 1X4 WD. FRAME -PT. AROUND MAP WITH INSET PLEXIGLAS
- FIRE EXTINGUISHER (FE1) ON WALL. RE: SPEC.
- FIRE EXTINGUISHER (FE2) IN CABINET. COORD. W/ RATED WALLS AS REQ. RE: SPEC.
- DOW, FIRE RISER, REDUCE PRESSURE BACKFLOW ASSEMBLY. RE: PLUMB.
- (24) JUMBO WALL MOUNTED BUNKER GEAR STORAGE LOCKERS (1 TO BE ON CASTERS). RE SPEC. & ELEC.
- GEAR DRYER BY OWNER & INSTALLED BY CONTRACTOR. RE: ELEC. & MECH.
- ELECTRICAL PANELS & EQUIPMENT. RE: ELEC.
- ROOF DRAIN TO UNDERGROUND & OVERFLOW DRAIN TO LAMBS TONGUE. RE: PLUMB. & CIVIL
- ROOF DRAIN TO UNDERGROUND. RE: PLUMB. & CIVIL
- OVERFLOW DRAIN TO LAMBS TONGUE. RE: PLUMB. & CIVIL
- ROOF DRAIN TO 4"X3" D.S. TO UNDERGROUND. OVERFLOW THROUGH

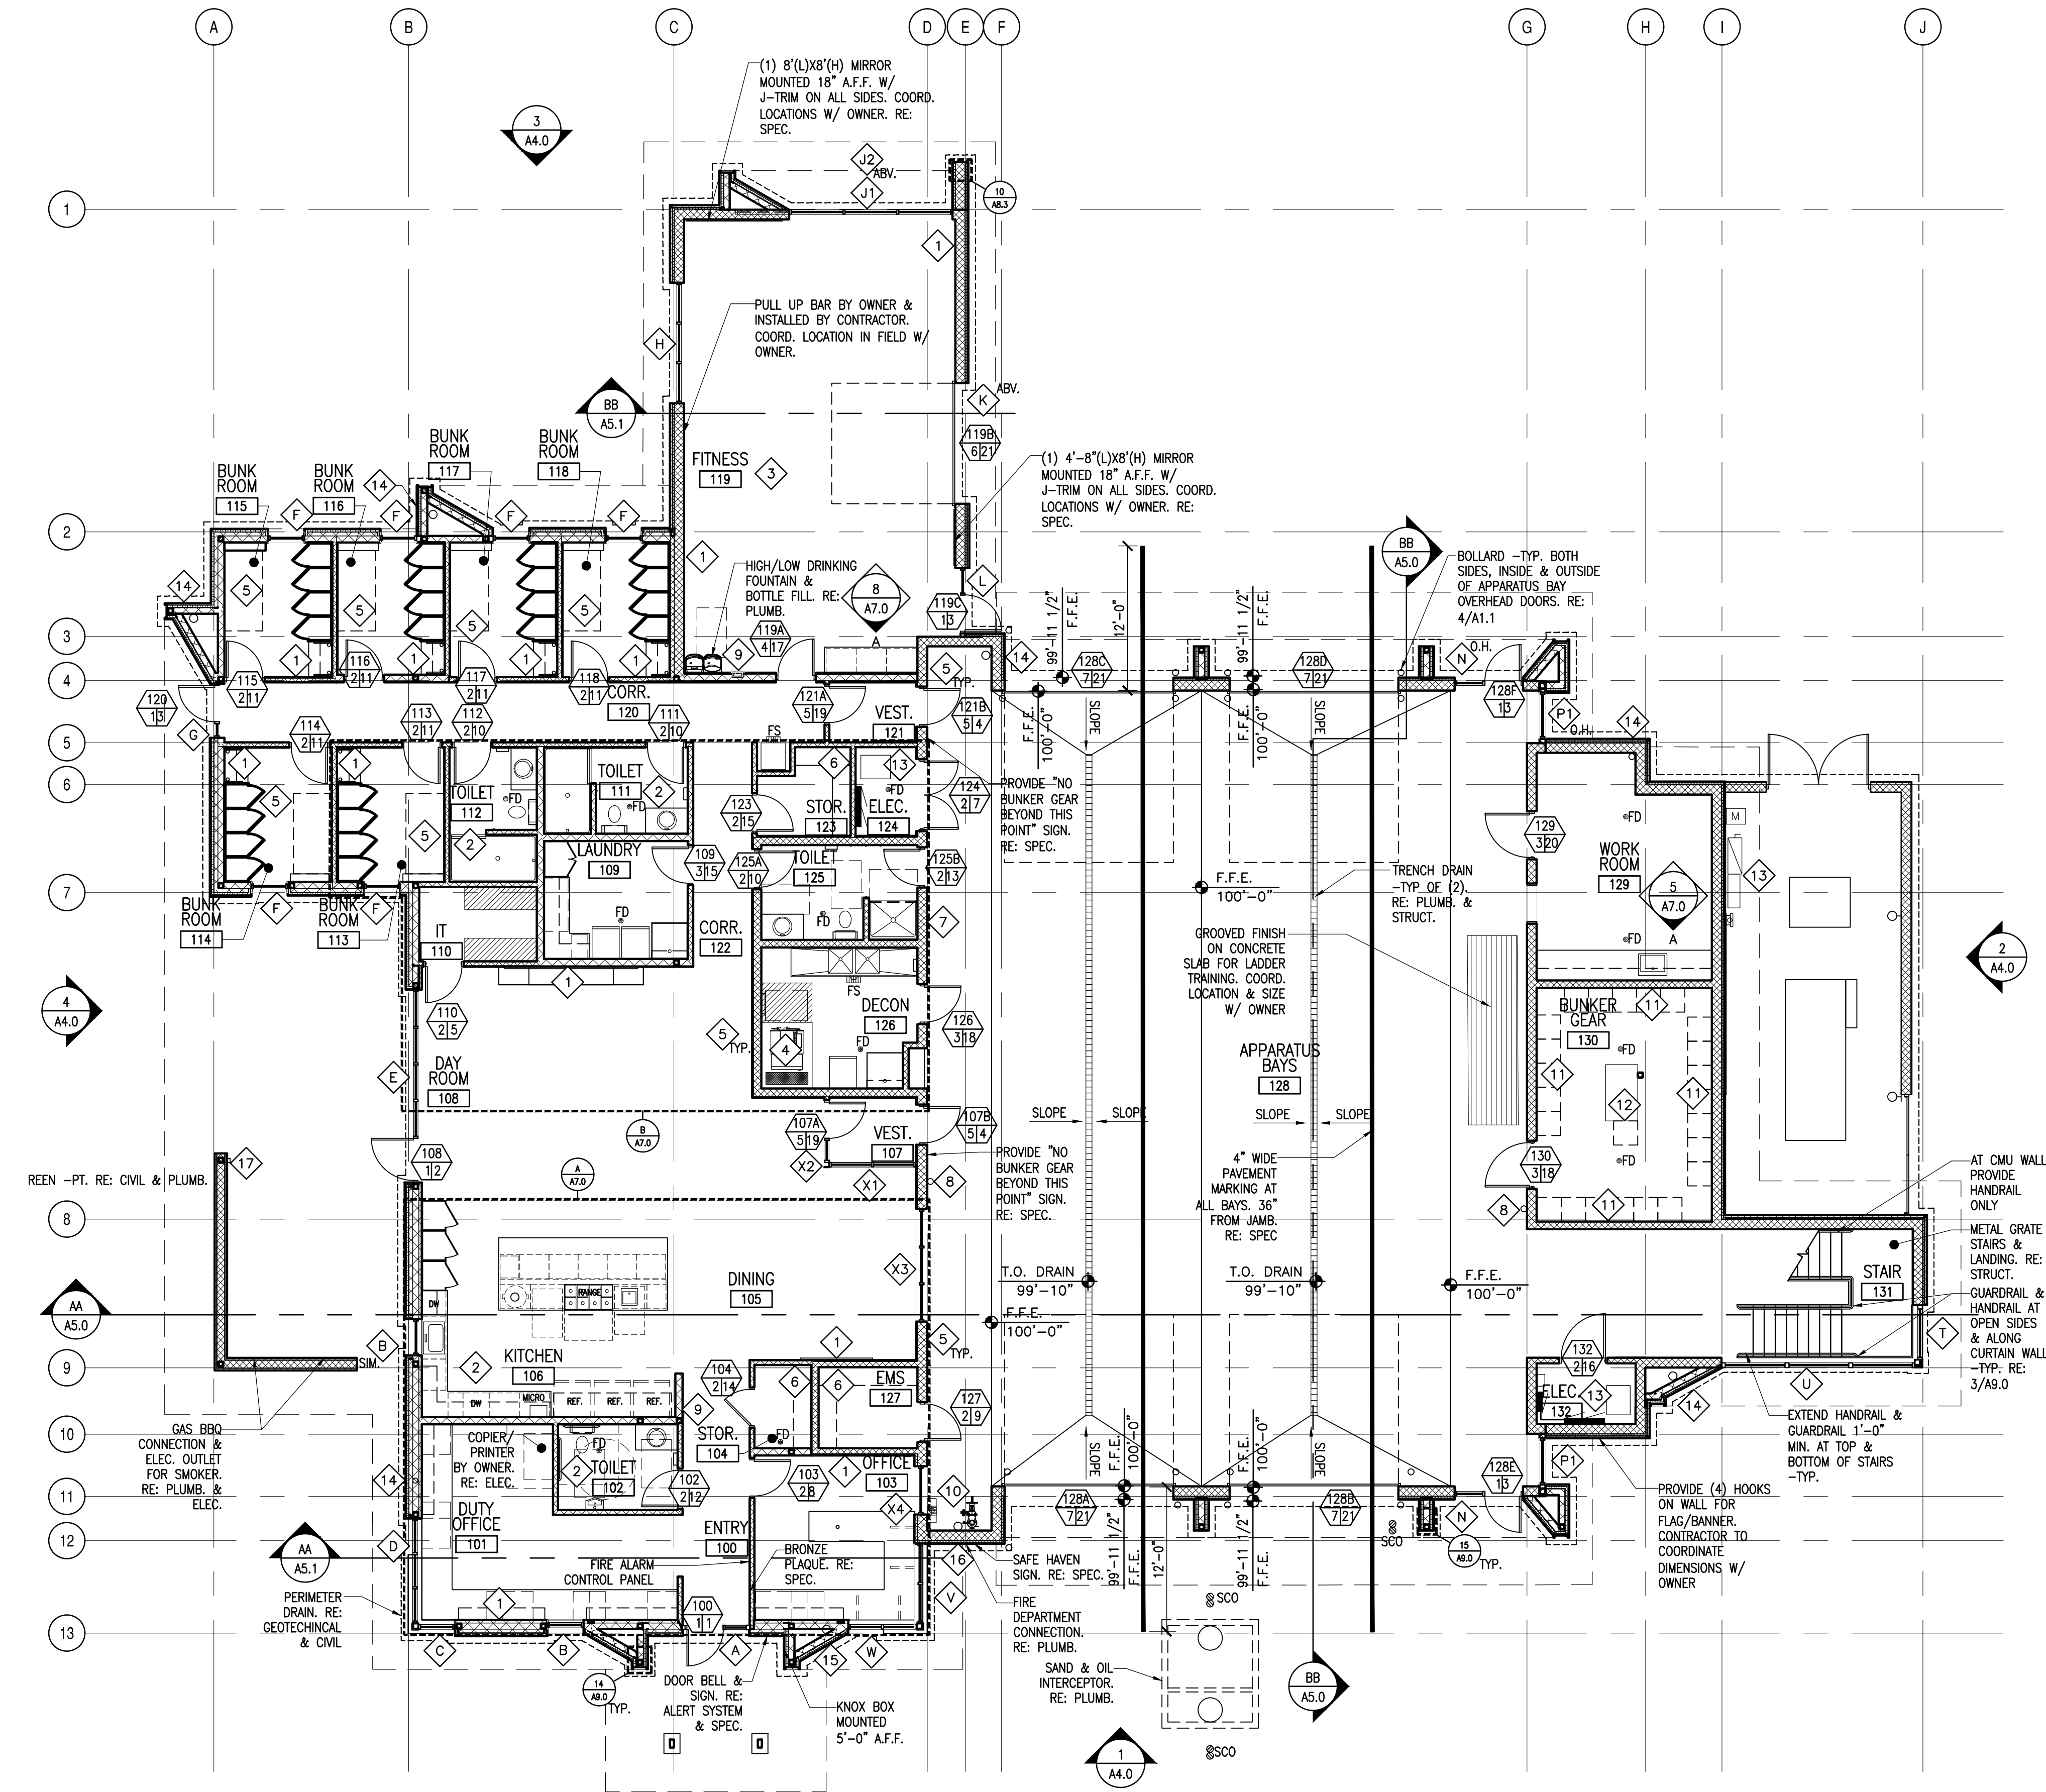

1 MAIN LEVEL FLOOR PLAN
SCALE: 1/8"=1'-0"

ALLRED & ASSOCIATES

ARCHITECTURE | PLANNING | INTERIOR DESIGN

588 BURBANK STREET, SUITE 125, BROOMFIELD, COLORADO 80020
www.allredarch.com

• JOB NO. 2309

BID SET

CITY OF THORNTON

FIRE STATION #8

15343 MONACO STREET


THORNTON, COLORADO 80602

REVISION NAME	DATE

ISSUE DATE: 2024 0927

FLOOR PLAN

A2.2

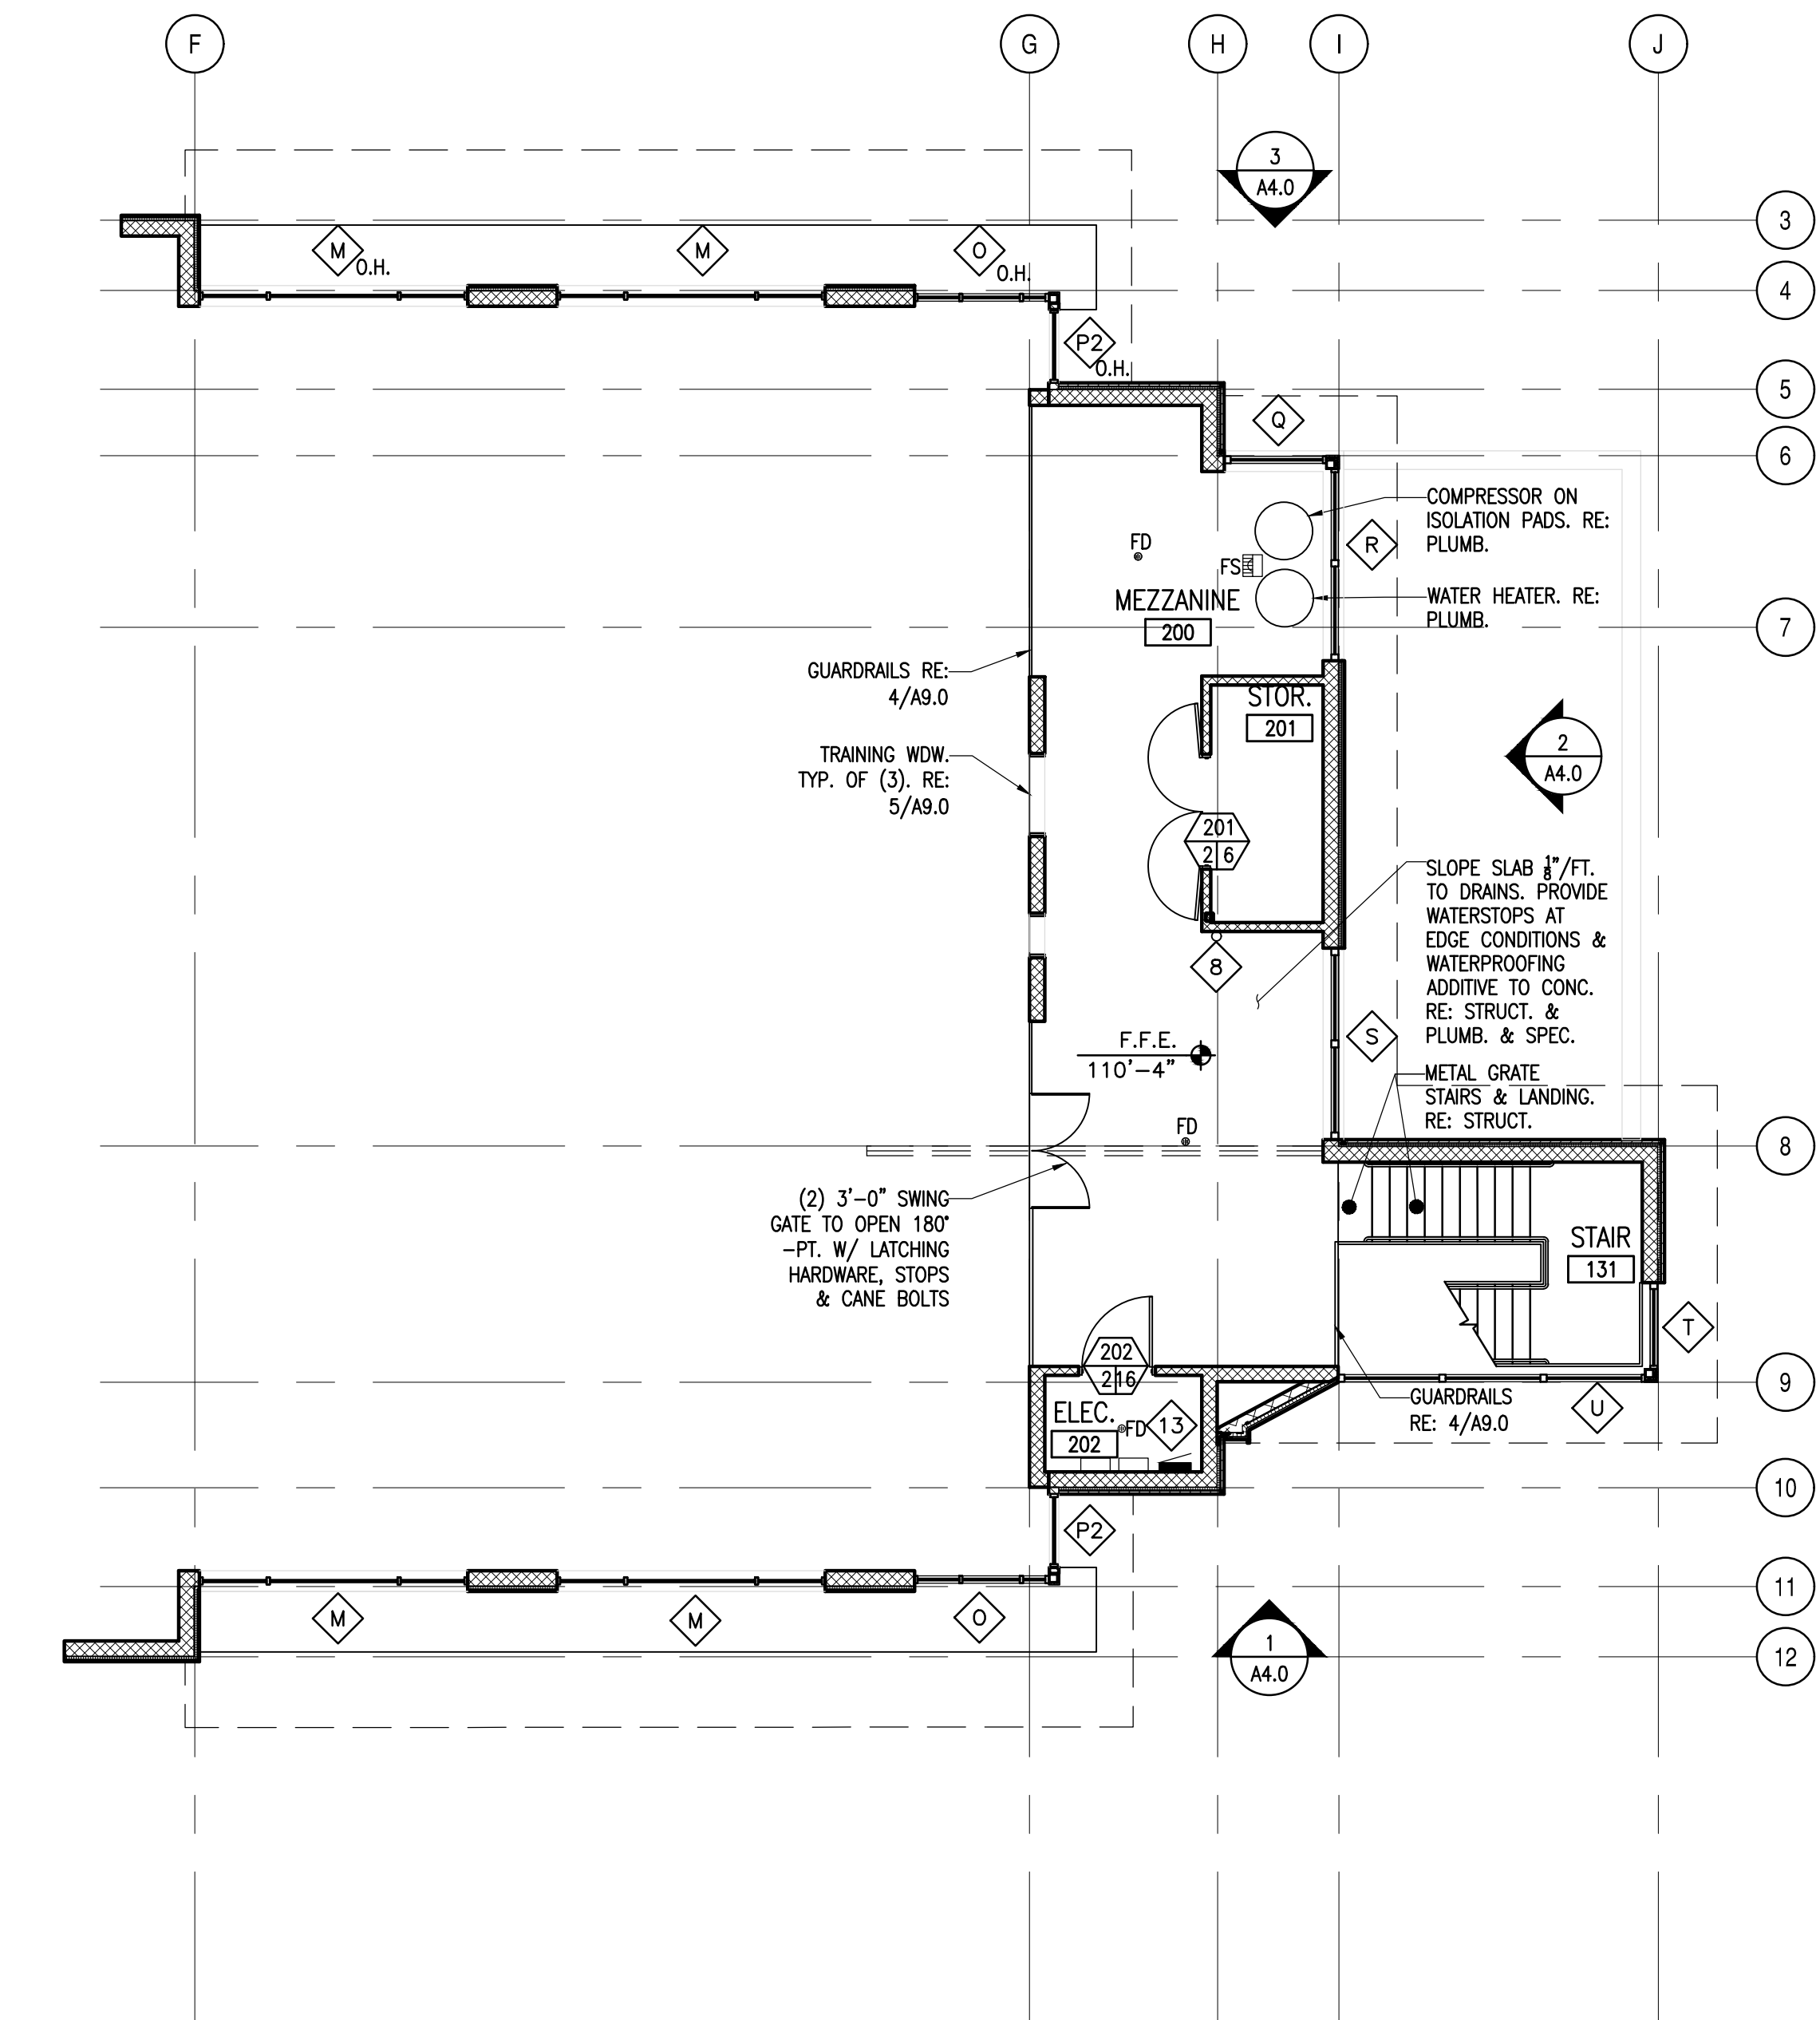

1 MEZZANINE FLOOR PLAN
SCALE: 1/8"=1'-0"

CITY OF THORNTON
FIRE STATION #8
15343 MONACO STREET
THORNTON, COLORADO 80602

ALLRED & ASSOCIATES
ARCHITECTURE | PLANNING | INTERIOR DESIGN
589 BURBANK STREET, SUITE 125, BROOMFIELD, COLORADO 80020
PHONE: 303.465.4306
WWW.ALLREDARCH.COM

• JOB NO. 2309


BID SET

REVISION NAME		DATE


ISSUE DATE: 2024 0927

MEZZANINE PLAN

A2.3

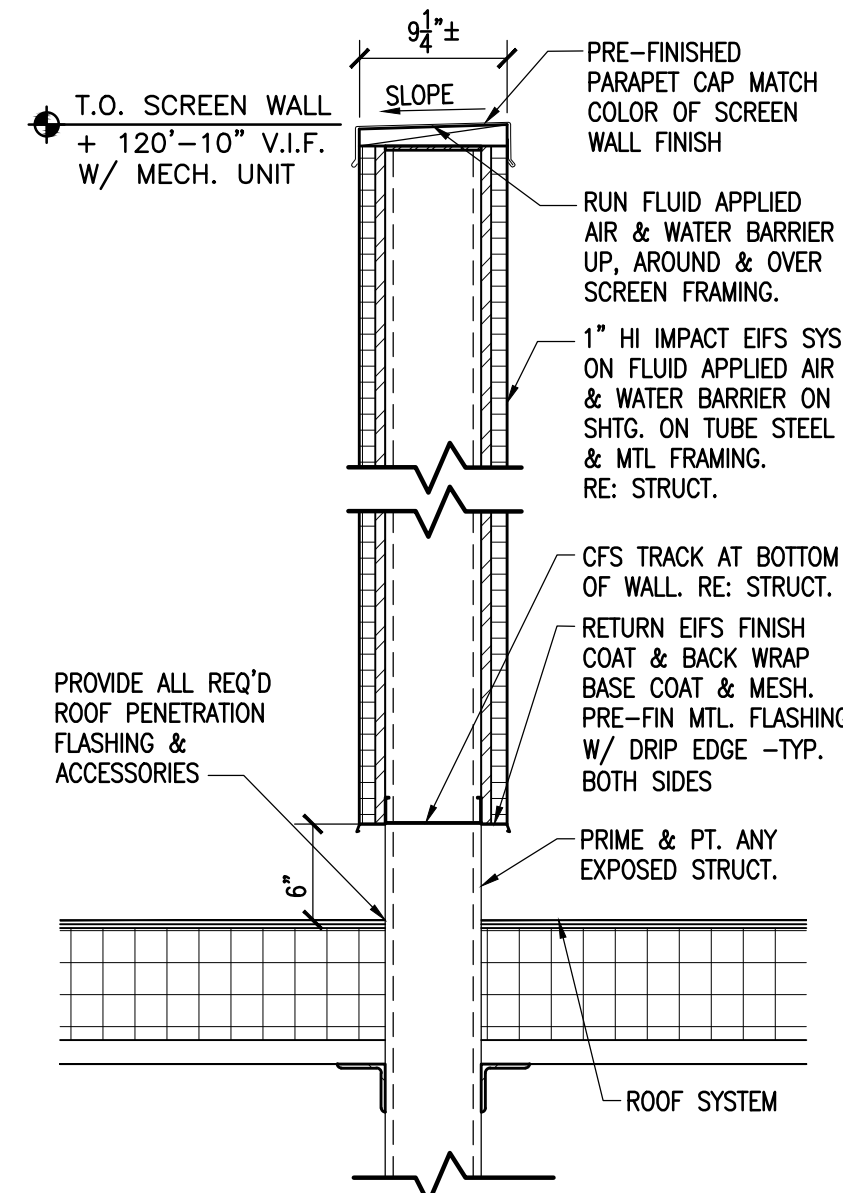


3 MECHANICAL SCREEN SECTION
1"=1'-0"

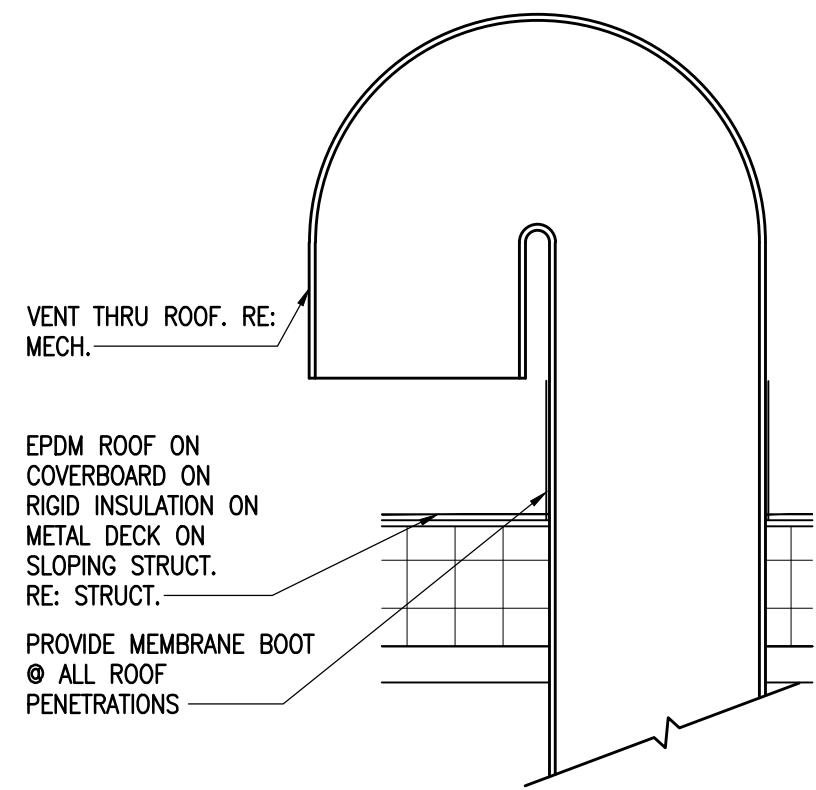

2 VENT THUR EPDM ROOF DETAIL
SCALE: 1-1/2"=1'-0"

ROOF GENERAL NOTES

- SEE MECHANICAL, ELECTRICAL & PLUMBING DRAWINGS FOR GENERAL LOCATION AND TYPE OF ROOF PENETRATION.
- ALL ROOF PENETRATIONS INCLUDING CURBS, VENT PIPES, FLUES AND CONDUITS SHALL BE LOCATED TO MAINTAIN AN 18" MIN. CLEAR BETWEEN THE OUTSIDE SURFACE OF THE PENETRATION AND ALL WALLS, CURBS, CRICKET VALLEYS, DRAINS, PIPES AND OTHER ROOF PENETRATIONS.
- INSTALL $\frac{1}{2}$ " PER FOOT CRICKETS ON THE UPHILL SIDE OF ALL CURBS.
- EXACT LOCATION OF THE VALLEYS SHALL BE FIELD VERIFIED AND ADJUSTED AS REQUIRED TO ACCOMMODATE VARIANCES IN CURB, DRAIN AND PENETRATION LOCATION. IF ANY CURBS OR PENETRATIONS WILL INTERFERE WITH PROPER DRAINAGE, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT PRIOR TO INSTALLATION OF ANY TAPERED INSULATION SO ADJUSTMENTS CAN BE MADE.
- ALL DRAINS SHALL HAVE A TAPERED INSULATION SUMP.
- ALL ROOF PROTRUSIONS PER DETAIL 2/A2.4 TO MATCH ROOF COLOR.
- ALL ROOF DRAINS TO TIE INTO UNDERGROUND DRAINS. RE: PLUMB. & CIVIL.
- SLOPE ROOFS AT $\frac{1}{4}$ " PER FT. MIN.
- CONTRACTOR TO COORDINATE TAPERED ROOF INSULATION MAX THICKNESSES TO VERIFY ALL WILL BE AT OR BELOW EDGE OF ROOF AT FASCIA LOCATIONS.
- CONTRACTOR TO PROVIDE WATER FLOW TEST AT ALL ROOF DRAINS.
- UTILITIES (GAS PIPING) TO BE KEPT CLEAR OF ALL WALKWAYS.

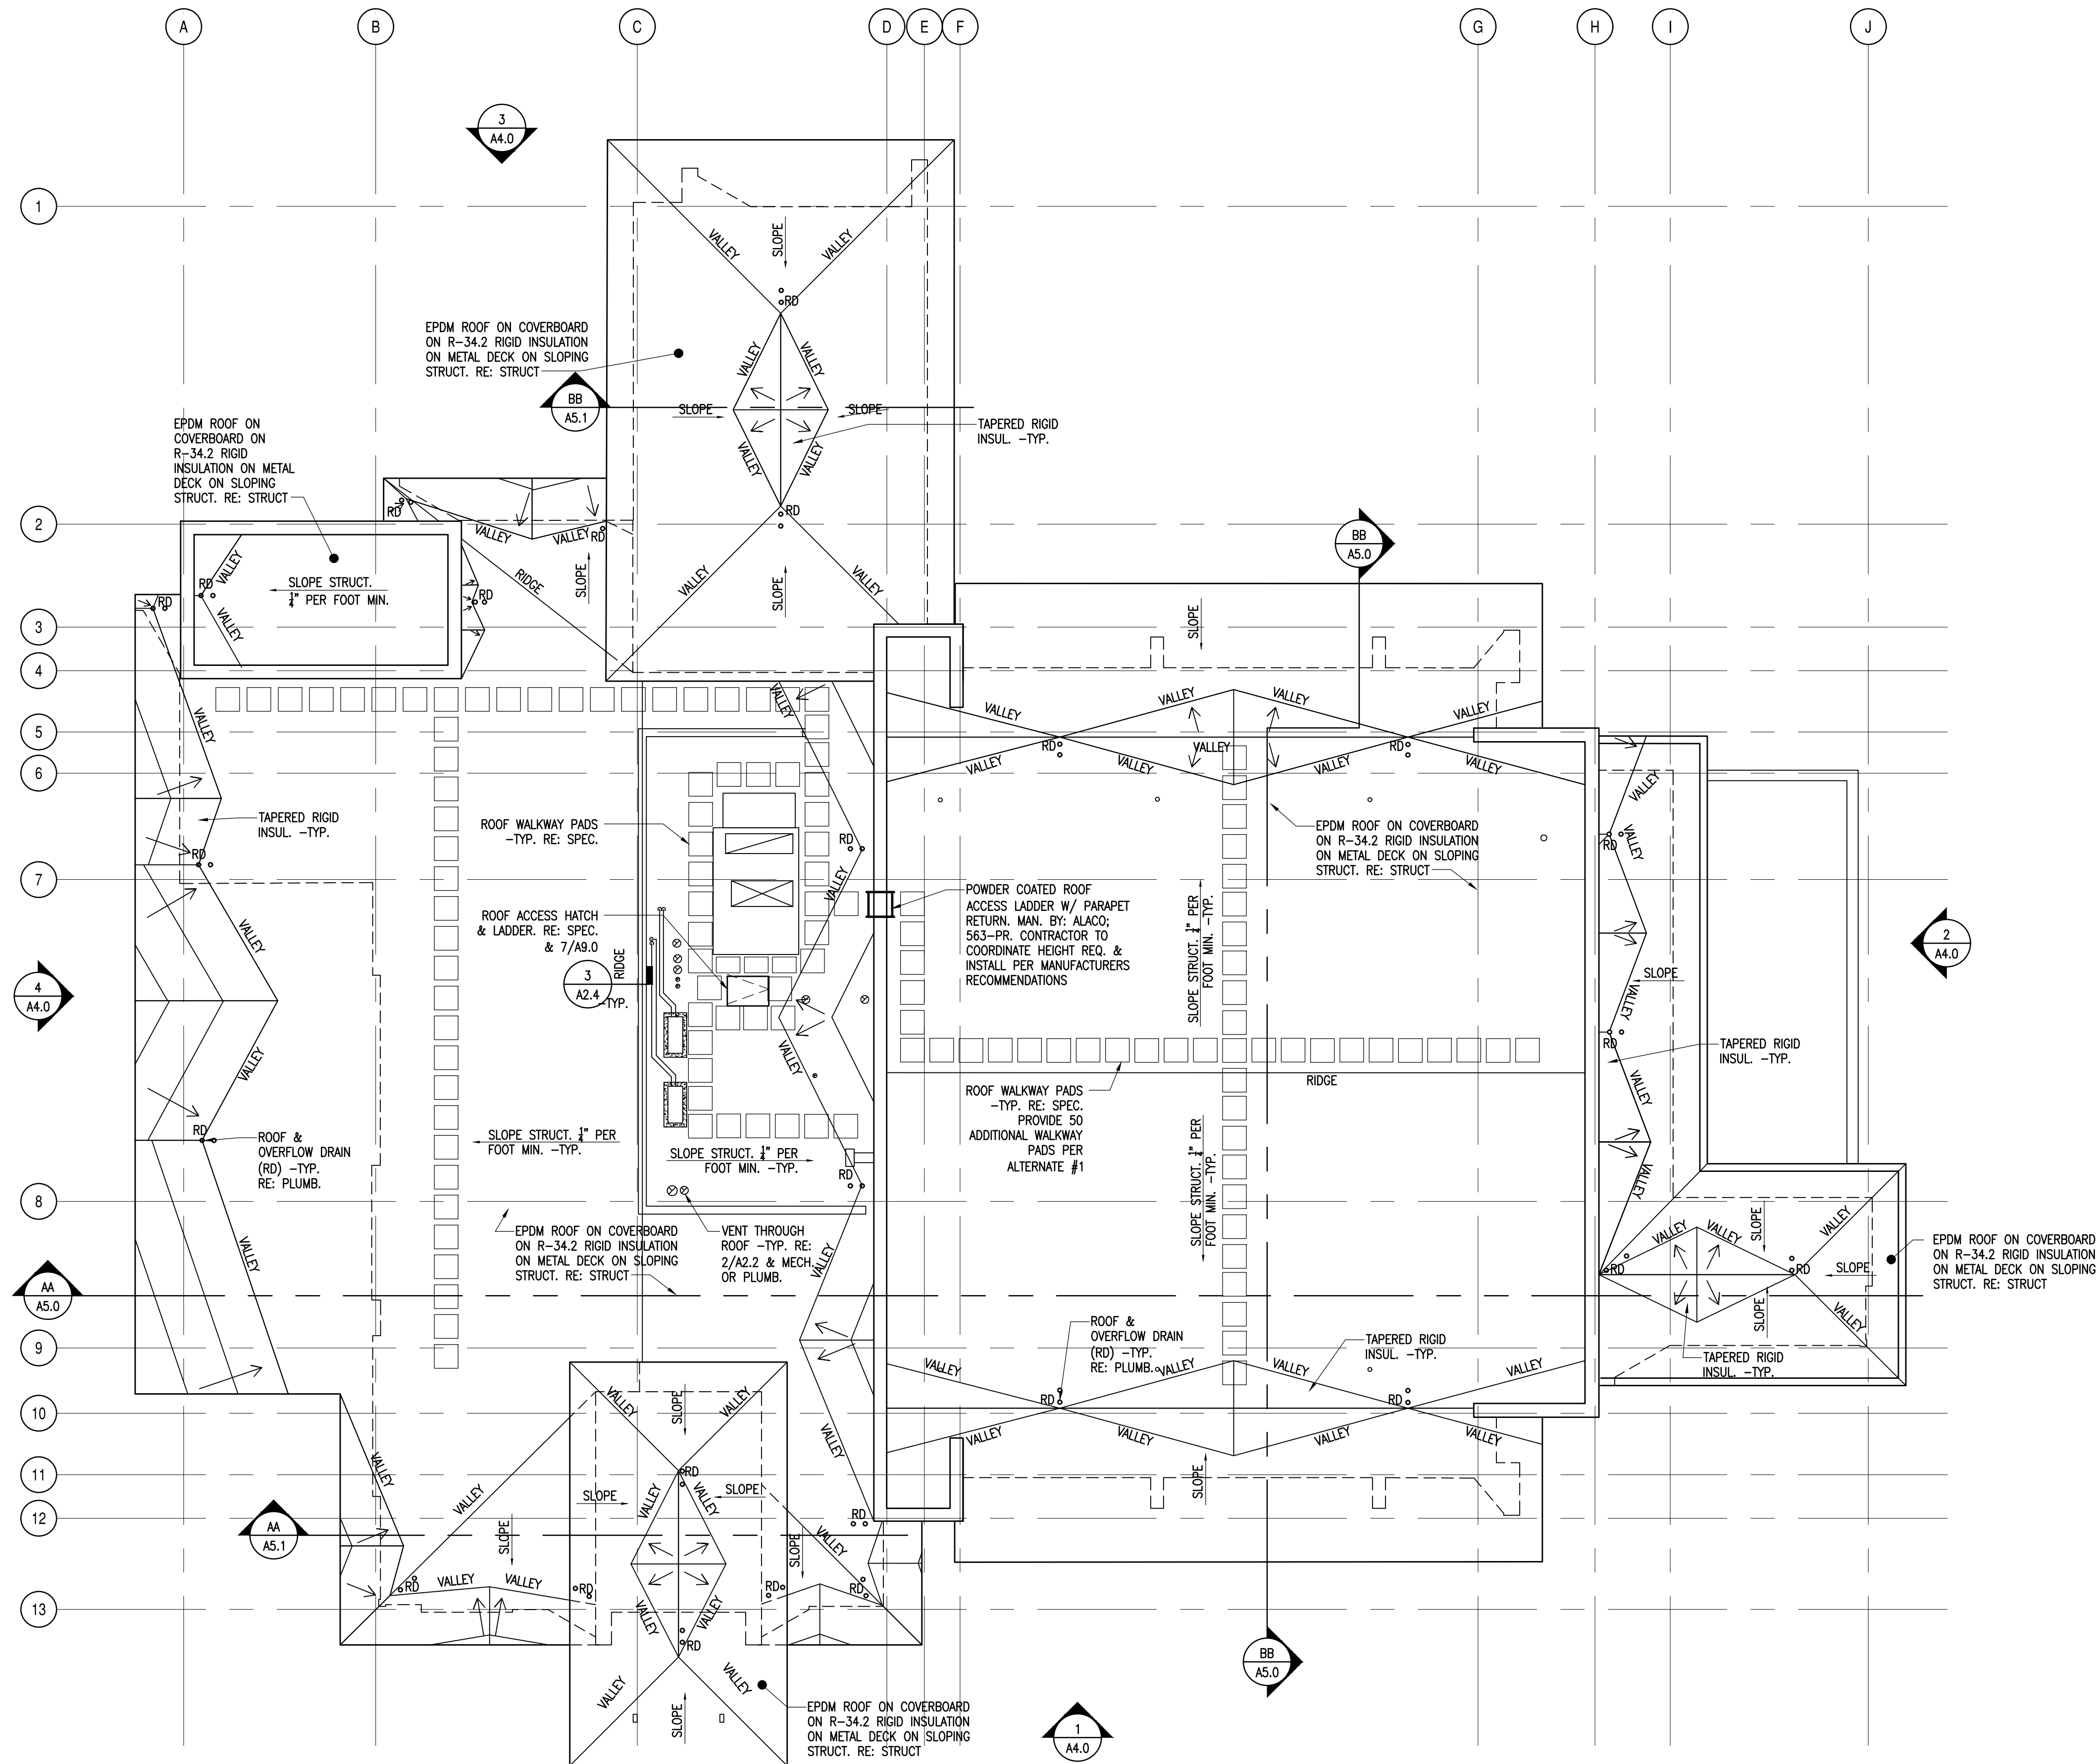

1 ROOF PLAN
SCALE: 1/8"=1'-0"

ALLRED & ASSOCIATES

ARCHITECTURE | PLANNING | INTERIOR DESIGN

589 BURBANK STREET, SUITE 125, BROOMFIELD, COLORADO 80020
PHONE: 303.465.4306
WWW.ALLREDARCH.COM

• JOB NO. 2309

BID SET

CITY OF THORNTON

FIRE STATION #8

15343 MONACO STREET

THORNTON, COLORADO 80602

REVISION NAME		DATE

ISSUE DATE: 2024 0927


ROOF PLAN
& DETAILS

A2.4

- GENERAL NOTES**
- SEE ROOM FINISH SCHEDULE FOR CEILING TYPES AND FINISHES.
 - SEE INTERIOR PARTITION TYPES FOR WALL TERMINATION INFORMATION.
 - COORDINATE ALL MECHANICAL, ELECTRICAL, LOW VOLTAGE, AND FIRE PROTECTION SYSTEMS THAT ARE SUPPORTED BY OR INTERFACE WITH CEILING AND SOFFIT SYSTEMS. SEE ELECTRICAL & LOW VOLTAGE DRAWINGS FOR ALARM, SMOKE DETECTION, SPEAKERS, AND OTHER MISC. CEILING MOUNTED EQUIPMENT. NO EXTRAS WILL BE PROVIDED FOR MOVING OF SAID EQUIPMENT.
 - ALL SPRINKLER HEADS & MECHANICAL/ ELECTRICAL/ PLUMBING / LOW VOLTAGE FIXTURES ARE TO BE CENTERED IN ACOUSTICAL CEILING TILES.
 - ALL GYP. BD. CLGS. TO BE A MINIMUM OF 5/8" TYPE 'X' GYP. BD. & W.R. 5/8" TYPE 'X' GYP. BD. AT DECON, TOILET & LAUNDRY ROOMS W/ VAPOR RETARDER. PROVIDE FRAMING & BLOCKING AS REQUIRED FOR GYP. BD. CEILINGS.
 - ALL MOUNTING SUPPORTS FOR MECHANICAL, ELECTRICAL, PLUMBING, AND LOW VOLTAGE FIXTURES ARE TO BE PROVIDED & INSTALLED BY THE CONTRACTOR.
 - CONTRACTOR TO PROVIDE ALL REQUIRED FIRE SAFING & FIRE STOPS AT RATED ASSEMBLIES.
 - GANGED ELECTRICAL SWITCHES TO BE LOCATED ON ONE COVERPLATE WITH MATCHING ELECTRICAL SWITCHES, OUTLETS, ETC.
 - NO PLUMBING, ELECTRICAL, LOW VOLTAGE OR FIRE SUPPRESSION LINES ARE TO BE EXPOSED. THE GENERAL CONTRACTOR SHALL COORDINATE CONCEALING ALL LINES IN WALLS AND CEILING ASSEMBLIES.
 - ALL PLUMBING & FIRE SUPPRESSION LINES TO BE GANGED TOGETHER & HELD TIGHT TO CEILING AT APPARATUS BAY, FITNESS & MEZZANINE CEILINGS -TYP.
 - ALL ROOF PENETRATIONS TO BE COORDINATED WITH THE ROOFING MANUFACTURER AND ROOF PLAN PRIOR TO INSTALLATION.
 - GYP. BD. WALL TO CEILING DETAIL RE: 4/A3.1, TYP.
 - TOILET ROOM FIXTURES AND BUNK ROOM DESK FIXTURES TO BE CENTERED ON THE COUNTERTOP BELOW.
 - UNDER CABINET LIGHTING TO BE HARD WIRED & CONTINUOUS TO FILL ENTIRE LENGTH OF CABINET. END TO END CONNECTORS REQUIRED. NO EXPOSED WIRES OR CORDS.
 - CONTRACTOR TO COORDINATE LED TAPE LIGHT LENGTHS WITH COVES TO CREATE AN EVEN & CONTINUOUS LIGHT. PROVIDE END TO END CONNECTORS BETWEEN RUNS AS REQUIRED & CONNECTOR WIRES AT CORNERS.
 - CONTRACTOR TO COORDINATE MEP & FIRE SUPPRESSION LINES WITH STRUCTURE & CEILING HEIGHTS & ADJUST AS REQ.
 - PROVIDE 1 HR RATED CEILING BOXES AT ALL CEILING PENETRATIONS PER UL P238.

LEGEND	
	-2'x2' RECESS MOUNTED FIXTURE. RE: ELEC.
	-STRIP FIXTURE. RE: ELEC.
	-WALL MOUNTED FIXTURE. RE: ELEC.
	-WALL SCONCE. RE: ELEC.
	-RECESSED FIXTURE. RE: ELEC.
	-UNDERCABINET FIXTURE. RE: ELEC.
	-SUSPENDED FIXTURE
	-PENDANT FIXTURE
	-COVE FIXTURE
	-EXIT LIGHT. RE: ELEC.
	-CEILING FAN. RE: ELEC.
	-RETURN. RE: MECH.
	-SUPPLY. RE: MECH.
	-EXHAUST FAN. RE: MECH.
	-SMOKE/CO2 DETECTOR. RE: ELEC.

FINISH LEGEND	
	ACT-1: 2X2 HALCYON ACOUSTICAL CEILING TILES. RE: SPEC.
	5/8" TYPE 'X' GYP. BD. -PT. ON SUSPENDED FRAMING. PROVIDE WR GYP. BD. @ ALL WET LOCATIONS. PROVIDE SOUND BATT INSULATION ABOVE TOILET ROOMS.
	5/8" TYPE 'X' GYP. BD. SOFFIT ON FRAMING AS REQ. FOR SUPPORT
	5/8" TYPE 'X' GYP. BD. HEADER. RE: 3/A3.1
	5/8" TYPE 'X' GYP. BD. COVE. RE: 2/A3.1
	5/8" TYPE 'X' GYP. BD. COVE. RE: 5/A3.1
	OPEN TO STRUCTURE
	PRE-FIN. ALUMN. PLANK RAINSCREEN SOFFIT ON HAT CHANNELS @ 18" O.C. ON BLDG WRAP ON P.T. PLYWD. ON FRAMING AS REQ. FOR SUPPORT. RE: STRUCT.
	1 HOUR RATED GYP. BD. CEILING ASSEMBLY PER UL DESIGN 1507 -PT.

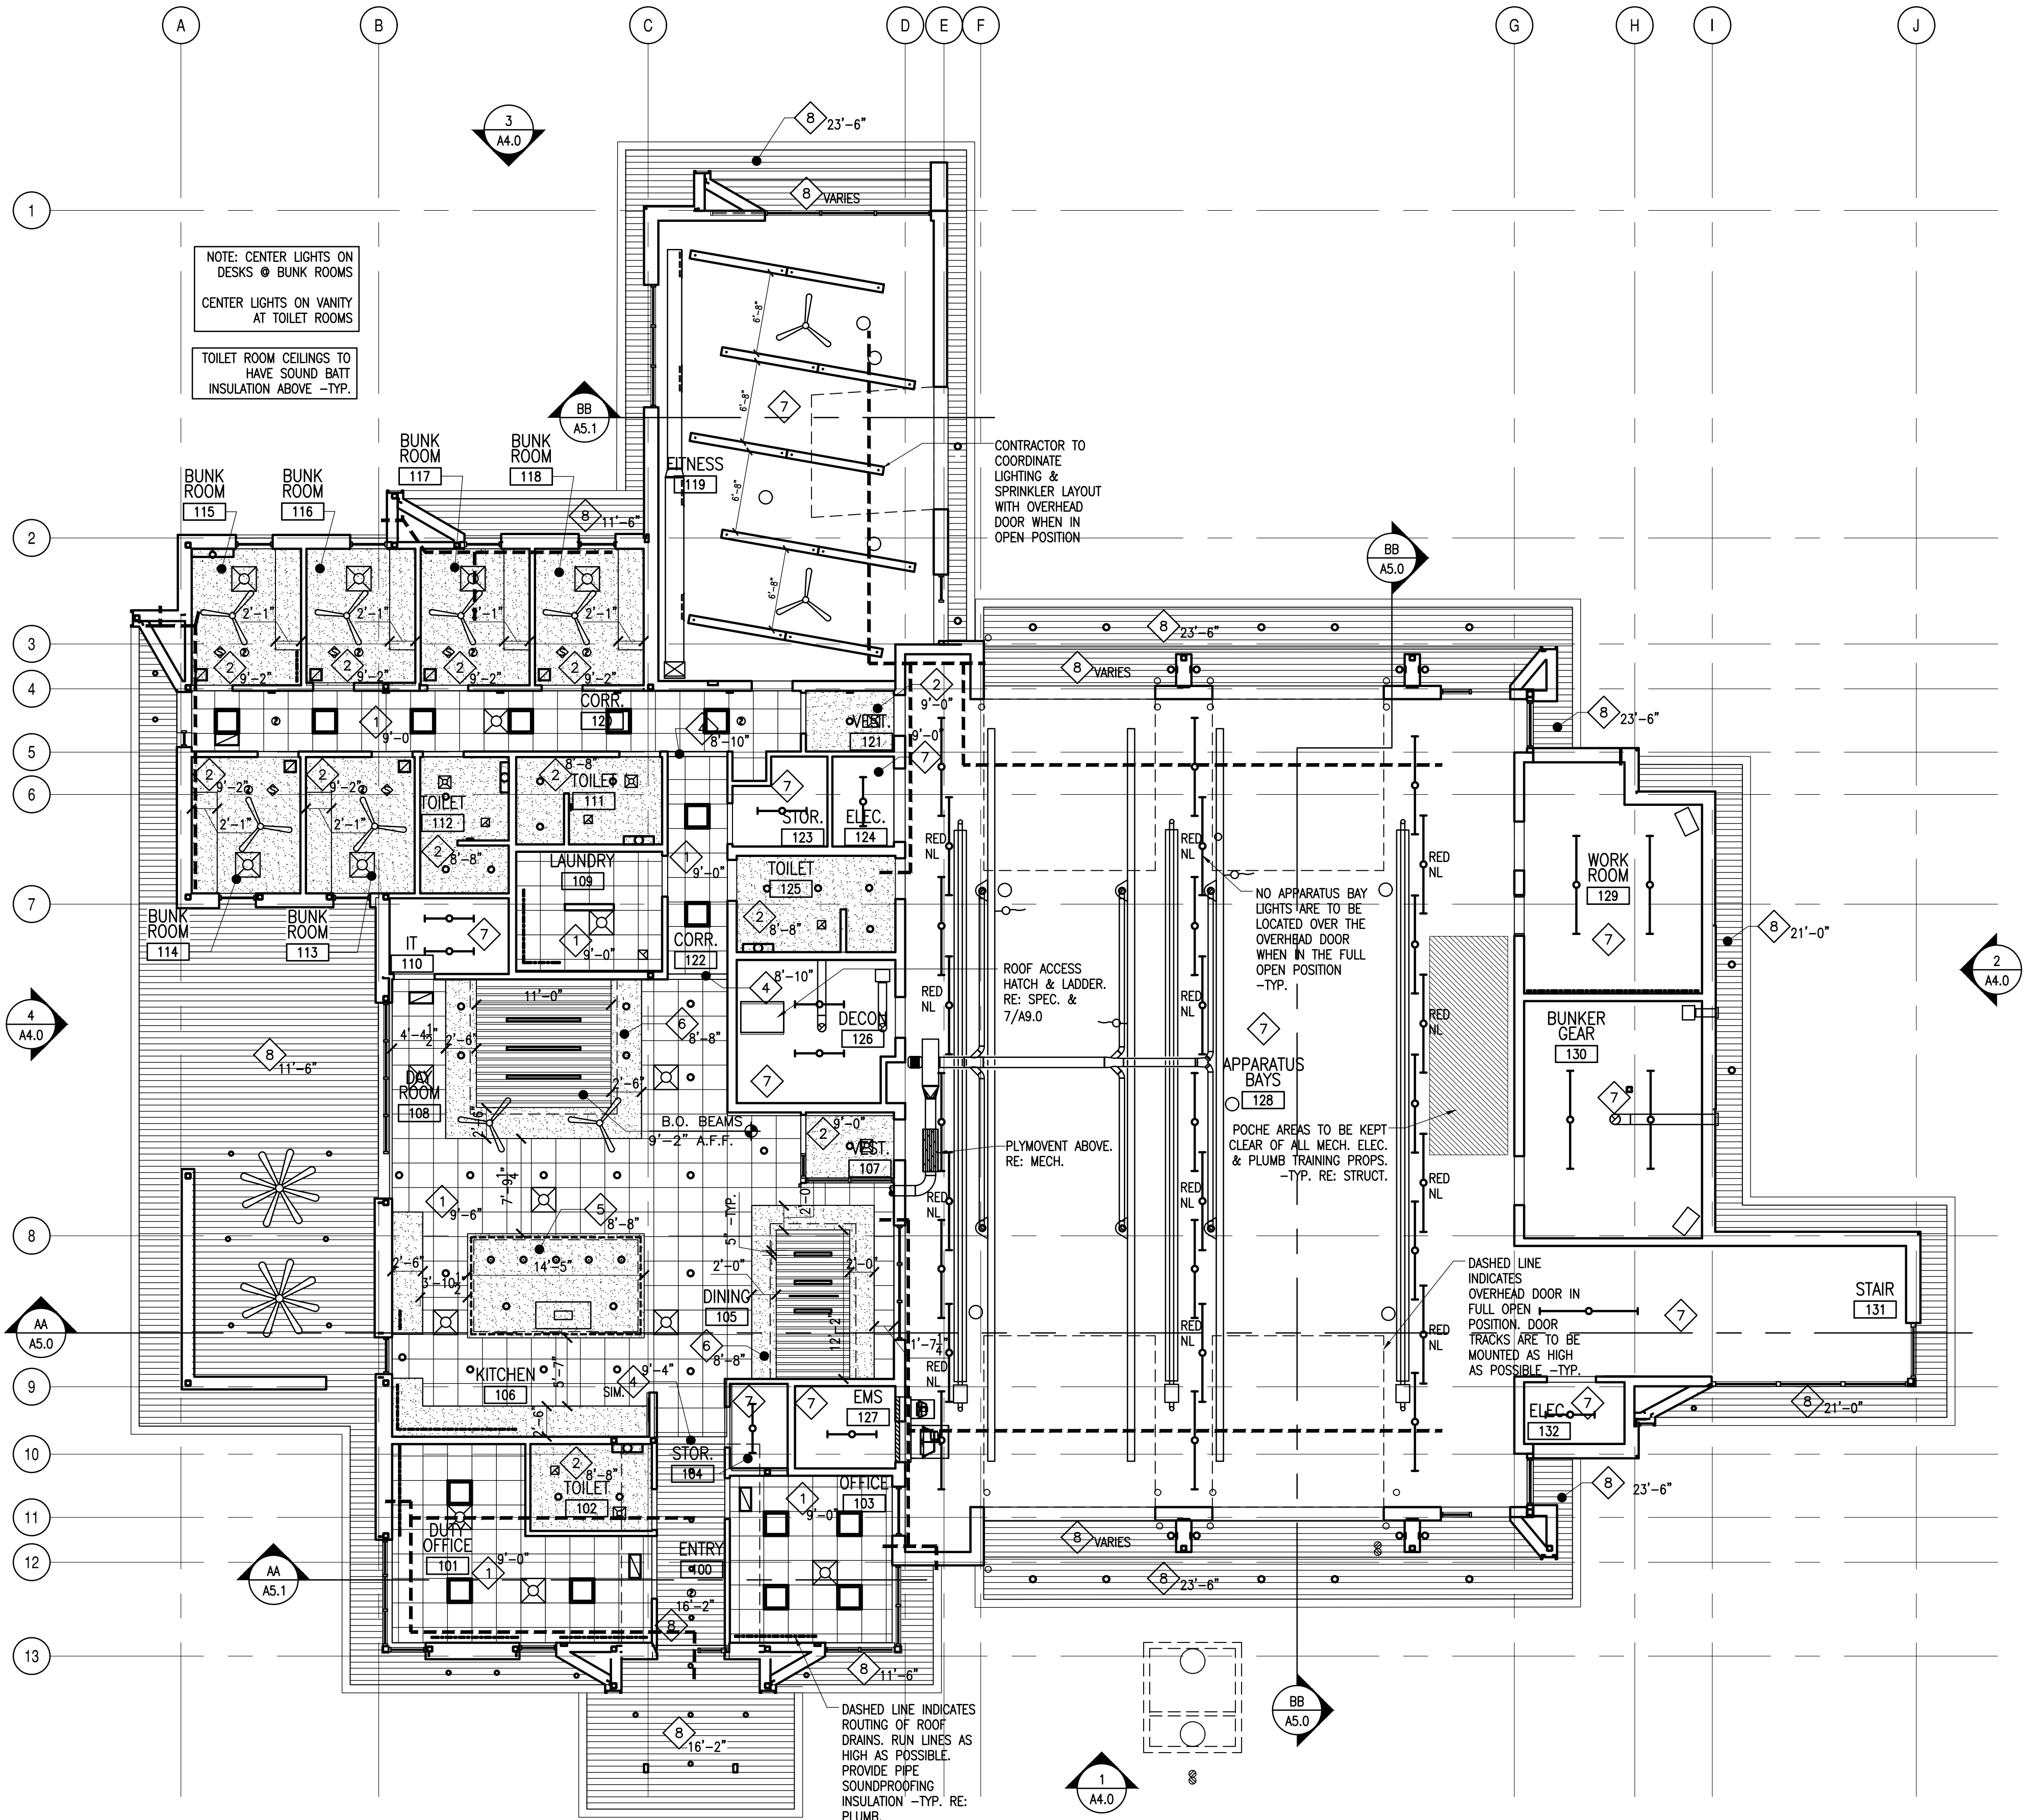

1 MAIN LEVEL REFLECTED CEILING PLAN
SCALE: 1/8"=1'-0"

ALLRED & ASSOCIATES

ARCHITECTURE | PLANNING | INTERIOR DESIGN
589 BURBANK STREET, SUITE 125, BROOMFIELD, COLORADO 80020
PHONE: 303.465.4306
WWW.ALLREDARCH.COM

• JOB NO. 2309

BID SET

1/8"=1'-0"

CITY OF THORNTON

FIRE STATION #8

15343 MONACO STREET

THORNTON, COLORADO 80602

REVISION NAME		DATE

ISSUE DATE: 2024.0927


MAIN LEVEL
RCP

A3.0


- GENERAL NOTES
- SEE ROOM FINISH SCHEDULE FOR CEILING TYPES AND FINISHES.
 - SEE INTERIOR PARTITION TYPES FOR WALL TERMINATION INFORMATION.
 - COORDINATE ALL MECHANICAL, ELECTRICAL, LOW VOLTAGE, AND FIRE PROTECTION SYSTEMS THAT ARE SUPPORTED BY OR INTERFACE WITH CEILING AND SOFFIT SYSTEMS. SEE ELECTRICAL & LOW VOLTAGE DRAWINGS FOR ALARM, SMOKE, DETECTION, SPEAKERS, AND OTHER MISC. CEILING MOUNTED EQUIPMENT. NO EXTRAS WILL BE PROVIDED FOR MOVING OF SAID EQUIPMENT.
 - ALL SPRINKLER HEADS & MECHANICAL/ ELECTRICAL/ PLUMBING / LOW VOLTAGE FIXTURES ARE TO BE CENTERED IN ACOUSTICAL CEILING TILES.
 - ALL GYP. BD. CLGS. TO BE A MINIMUM OF 5/8" TYPE 'X' GYP. BD. & W.R. 5/8" TYPE 'X' GYP. BD. AT DECON, TOILET & LAUNDRY ROOMS W/ VAPOR RETARDER. PROVIDE FRAMING & BLOCKING AS REQUIRED FOR GYP. BD. CEILINGS.
 - ALL MOUNTING SUPPORTS FOR MECHANICAL, ELECTRICAL, PLUMBING, AND LOW VOLTAGE FIXTURES ARE TO BE PROVIDED & INSTALLED BY THE CONTRACTOR.
 - CONTRACTOR TO PROVIDE ALL REQUIRED FIRE SAFING & FIRE STOPS AT RATED ASSEMBLIES.
 - GANGED ELECTRICAL SWITCHES TO BE LOCATED ON ONE COVERPLATE WITH MATCHING ELECTRICAL SWITCHES, OUTLETS, ETC.
 - NO PLUMBING, ELECTRICAL, LOW VOLTAGE OR FIRE SUPPRESSION LINES ARE TO BE EXPOSED. THE GENERAL CONTRACTOR SHALL COORDINATE CONCEALING ALL LINES IN WALLS AND CEILING ASSEMBLIES.
 - ALL PLUMBING & FIRE SUPPRESSION LINES TO BE GANGED TOGETHER & HELD TIGHT TO CEILING AT APPARATUS BAY, FITNESS & MEZZANINE CEILINGS -TYP.
 - ALL ROOF PENETRATIONS TO BE COORDINATED WITH THE ROOFING MANUFACTURER AND ROOF PLAN PRIOR TO INSTALLATION.
 - GYP. BD. WALL TO CEILING DETAIL. RE: 4/A3.1, TYP.
 - TOILET ROOM FIXTURES AND BUNK ROOM DESK FIXTURES TO BE CENTERED ON THE COUNTERTOP BELOW.
 - UNDER CABINET LIGHTING TO BE HARD WIRED & CONTINUOUS TO FILL ENTIRE LENGTH OF CABINET. END TO END CONNECTORS REQUIRED. NO EXPOSED WIRES OR CORDS.
 - CONTRACTOR TO COORDINATE LED TAPE LIGHT LENGTHS WITH COVES TO CREATE AN EVEN & CONTINUOUS LIGHT. PROVIDE END TO END CONNECTORS BETWEEN RUNS AS REQUIRED & CONNECTOR WIRES AT CORNERS.
 - CONTRACTOR TO COORDINATE MEP & FIRE SUPPRESSION LINES WITH STRUCTURE & CEILING HEIGHTS & ADJUST AS REQ.
 - PROVIDE 1 HR RATED CEILING BOXES AT ALL CEILING PENETRATIONS PER UL P238.

- LEGEND
- 2'x2' RECESS MOUNTED FIXTURE. RE: ELEC.
 - STRIP FIXTURE. RE: ELEC.
 - WALL MOUNTED FIXTURE. RE: ELEC.
 - WALL SCONCE. RE: ELEC.
 - RECESSED FIXTURE. RE: ELEC.
 - UNDERCABINET FIXTURE. RE: ELEC.
 - SUSPENDED FIXTURE
 - PENDANT FIXTURE
 - COVE FIXTURE
 - EXIT LIGHT. RE: ELEC.
 - CEILING FAN. RE: ELEC.
 - RETURN. RE: MECH
 - SUPPLY. RE: MECH.
 - EXHAUST FAN, RE: MECH.
 - SMOKE/CO2 DETECTOR. RE: ELEC.


- FINISH LEGEND
- 1 ACT-1: 2X2 HALCYON ACOUSTICAL CEILING TILES. RE: SPEC.
 - 2 5/8" TYPE 'X' GYP. BD. -PT. ON SUSPENDED FRAMING. PROVIDE WR GYP. BD. @ ALL WET LOCATIONS. PROVIDE SOUND BATT INSULATION ABOVE TOILET ROOMS.
 - 3 5/8" TYPE 'X' GYP. BD. SOFFIT ON FRAMING AS REQ. FOR SUPPORT
 - 4 5/8" TYPE 'X' GYP. BD. HEADER. RE: 3/A3.1
 - 5 5/8" TYPE 'X' GYP. BD. COVE. RE: 2/A3.1
 - 6 5/8" TYPE 'X' GYP. BD. COVE. RE: 5/A3.1
 - 7 OPEN TO STRUCTURE
 - 8 PRE-FIN. ALUMN. PLANK RAINSCREEN SOFFIT ON HAT CHANNELS @ 18" O.C. ON BLDG WRAP ON P.T. PLYWD. ON FRAMING AS REQ. FOR SUPPORT. RE: STRUCT.
 - 9 1 HOUR RATED GYP. BD. CEILING ASSEMBLY PER UL DESIGN I507 -PT.

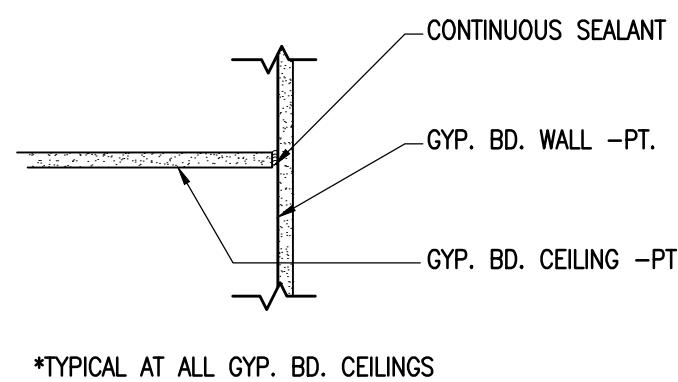


4 TYPICAL GYP. BD. CEILING DETAIL
SCALE: 1-1/2"=1'-0"

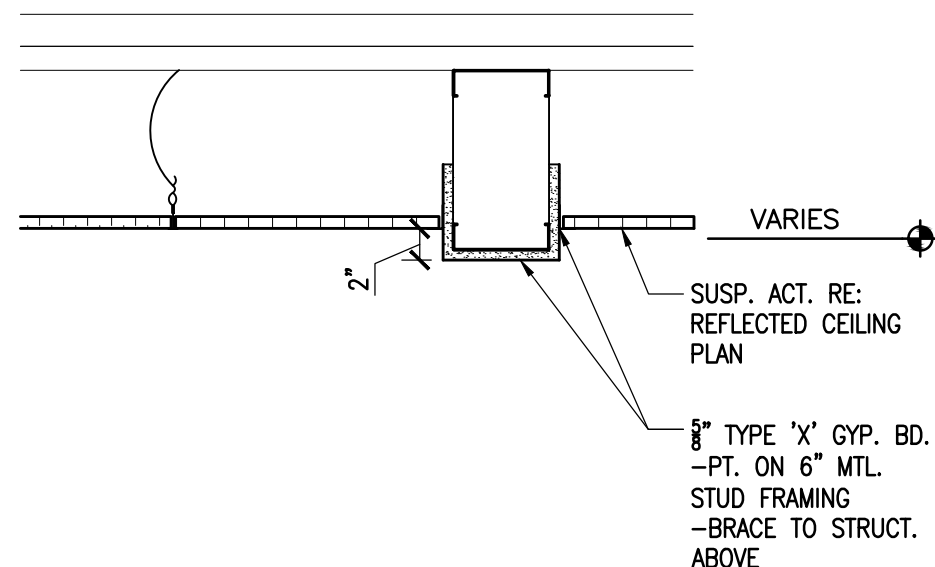


3 HEADER DETAIL
SCALE: 1"=1'-0"

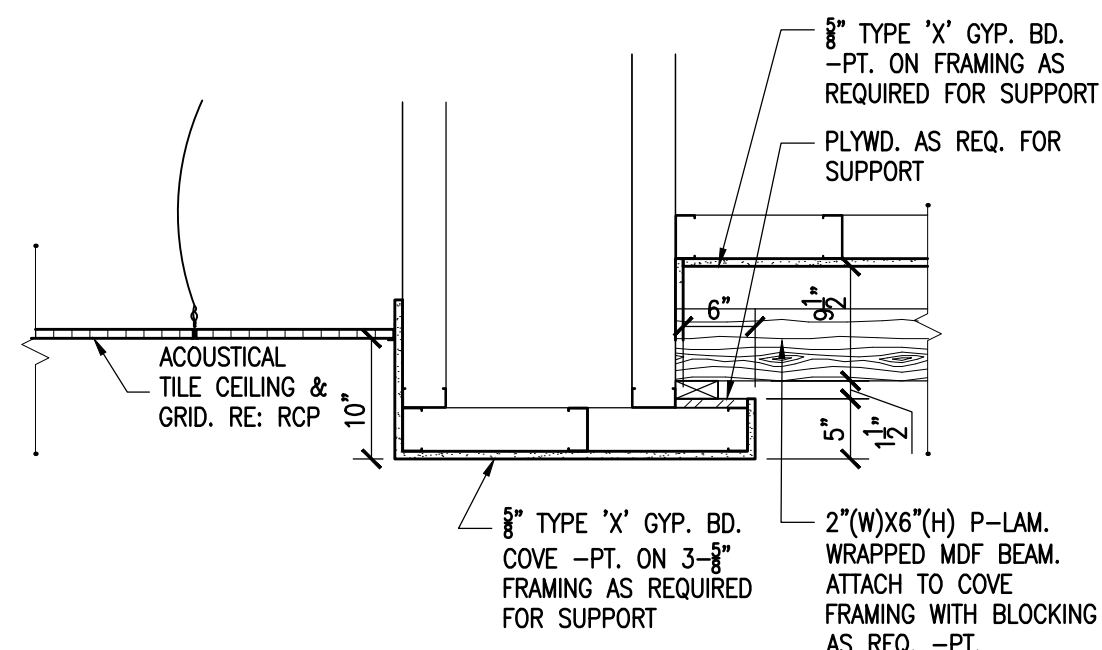

5 COVE CEILING & P-LAM. BEAM DETAIL
SCALE: 3/4"=1'-0"

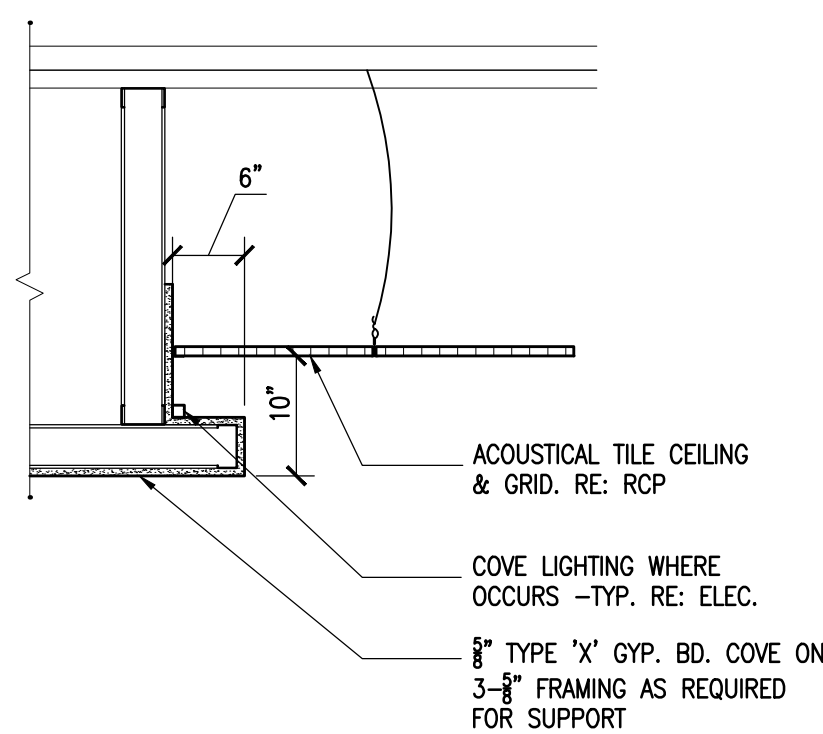




2 COVE CEILING DETAIL
SCALE: 3/4"=1'-0"

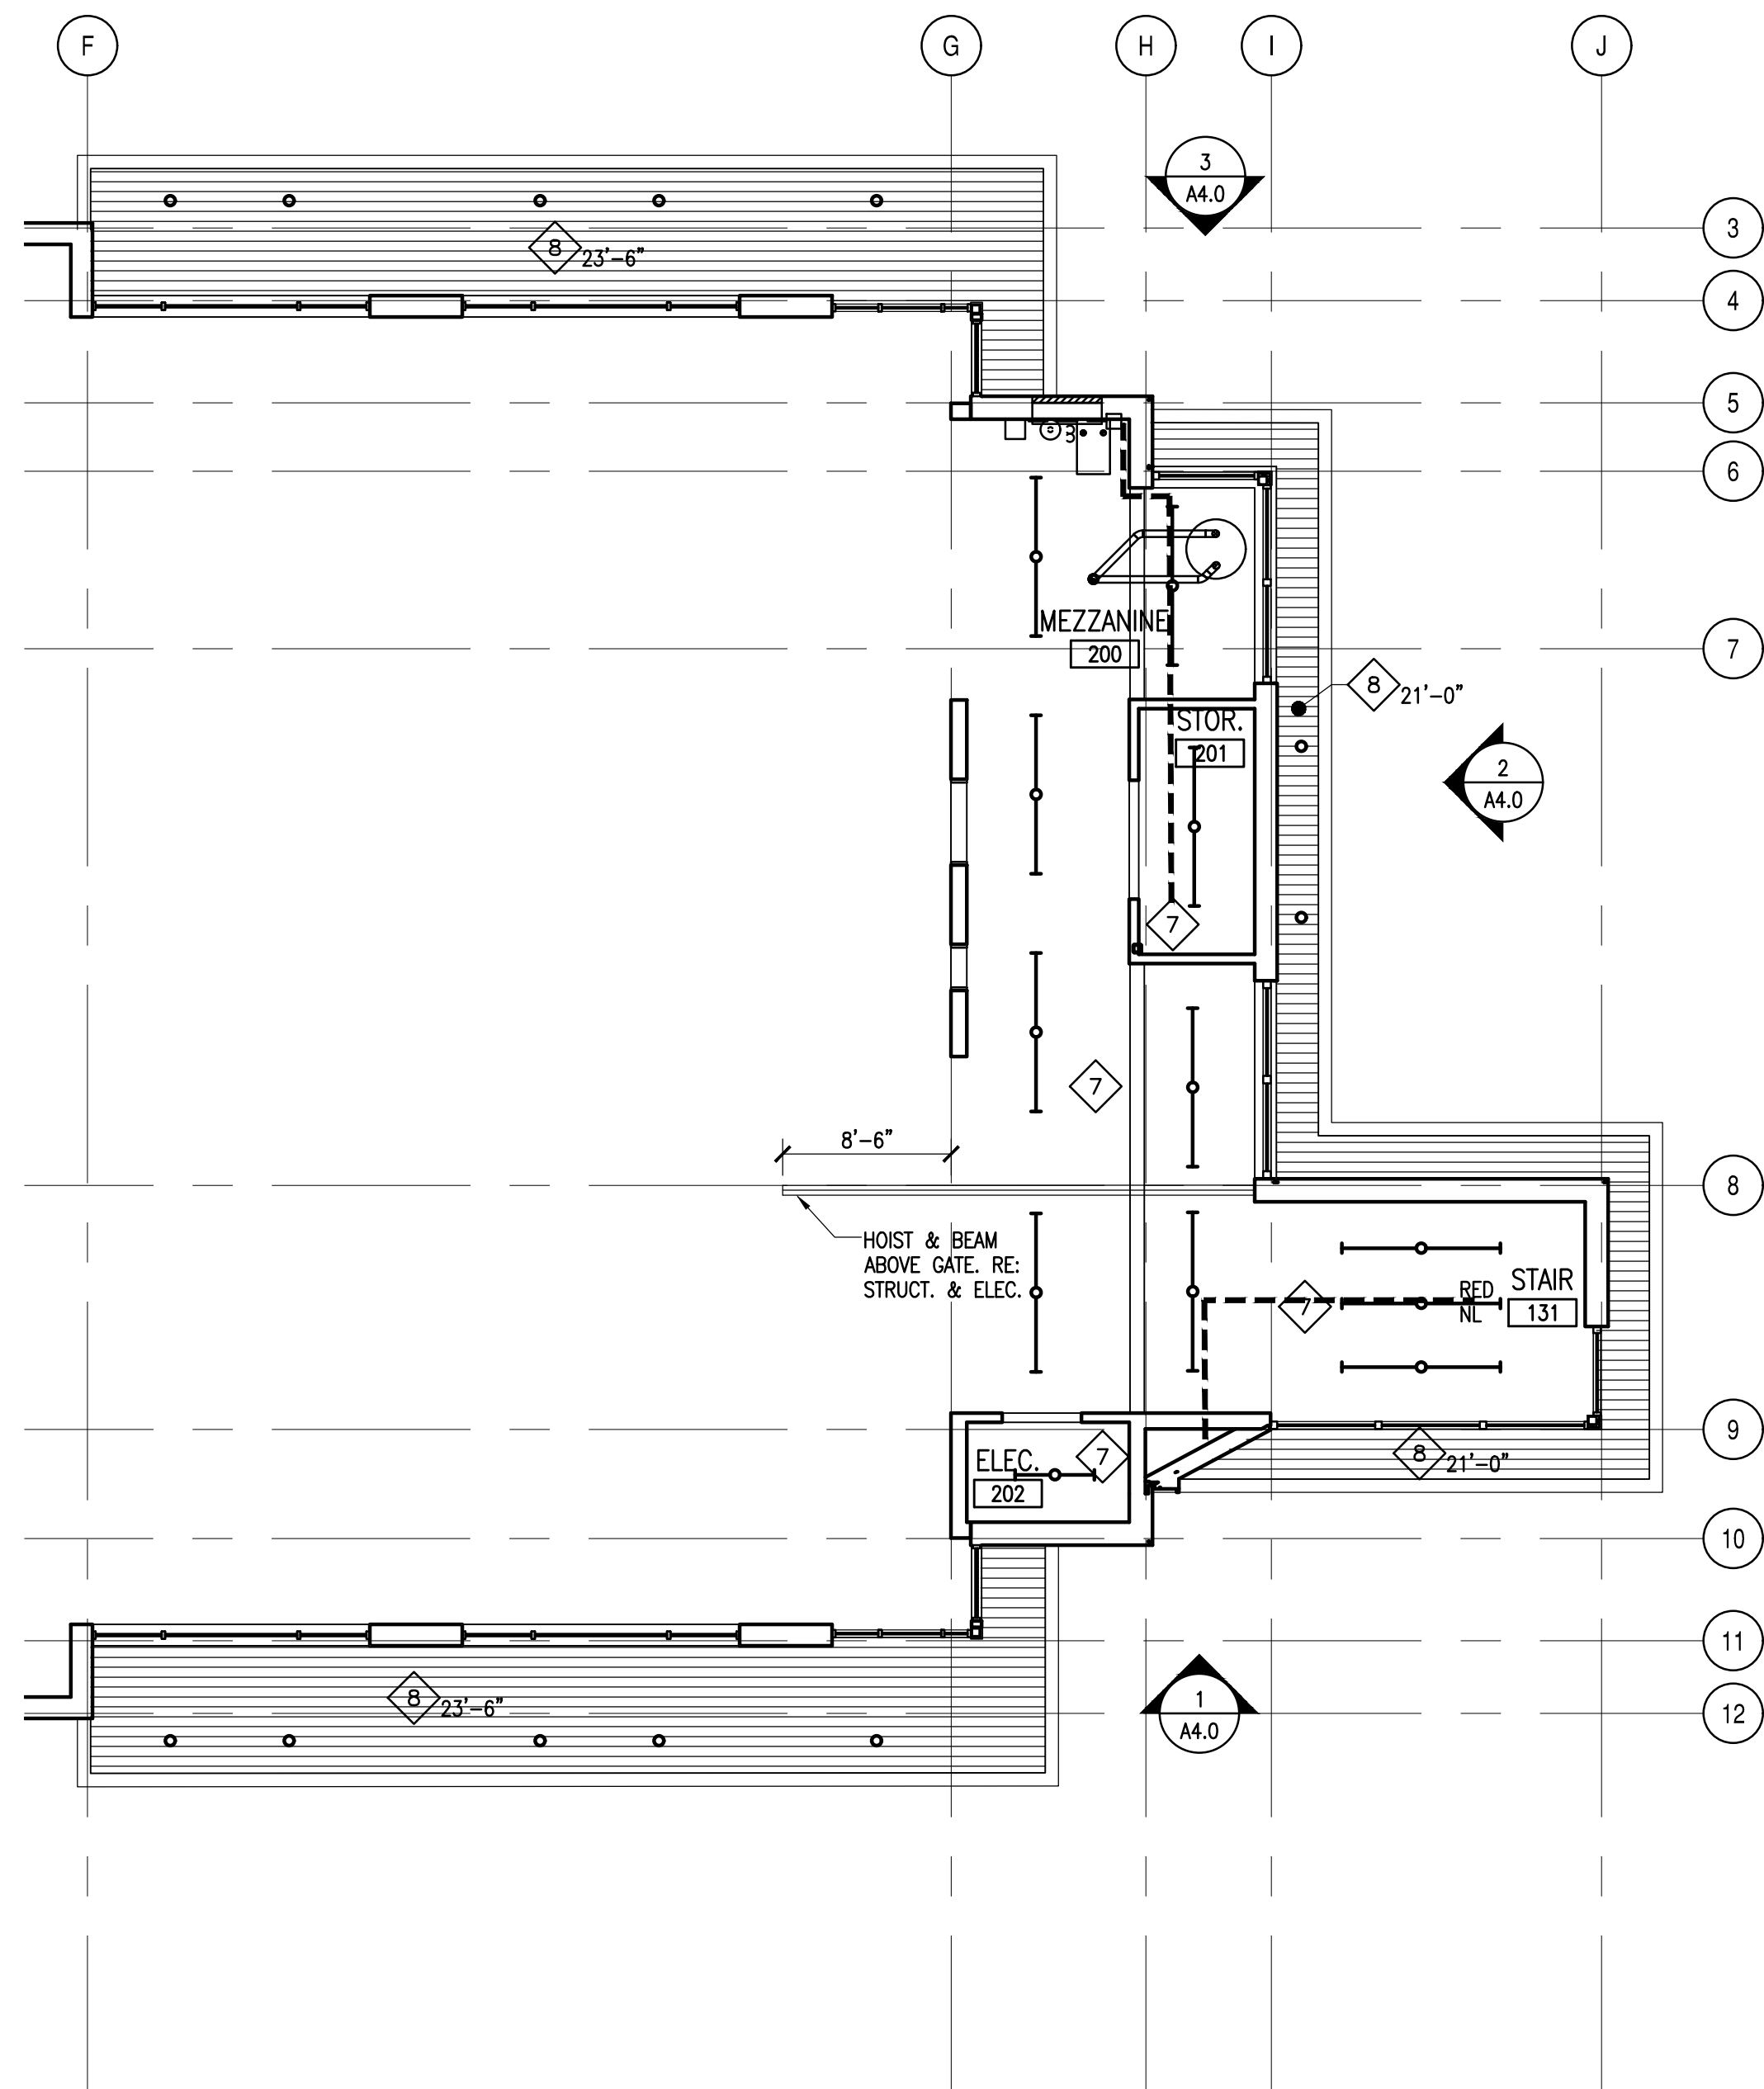

1 MEZZANINE FLOOR PLAN
SCALE: 1/8"=1'-0"

REVISION NAME	DATE

ISSUE DATE: 2024 0927

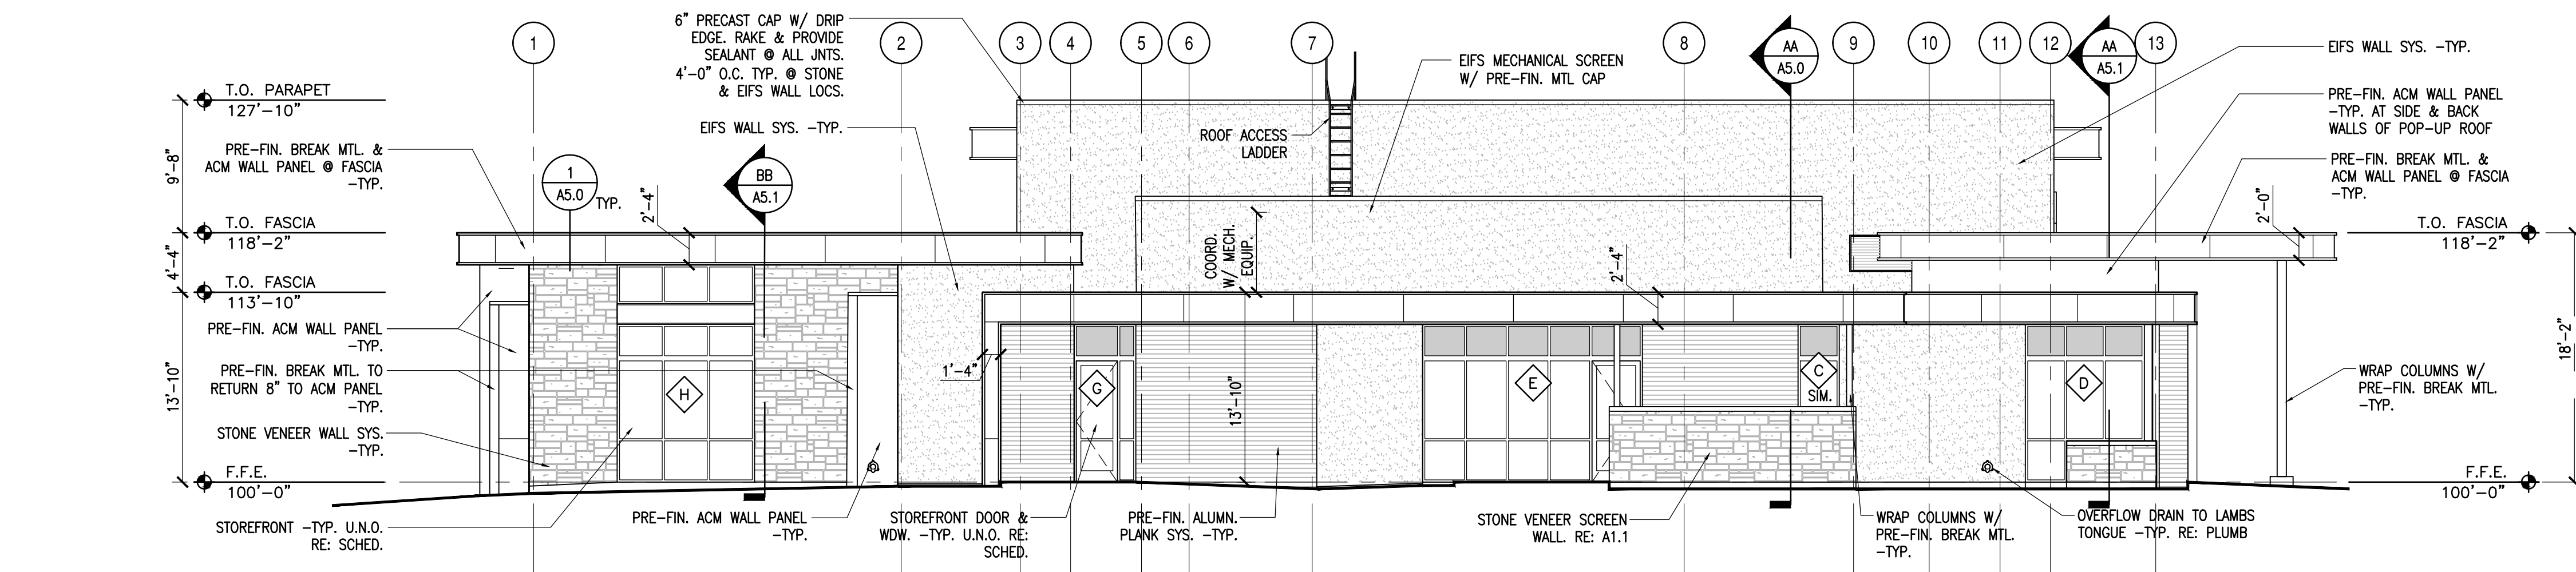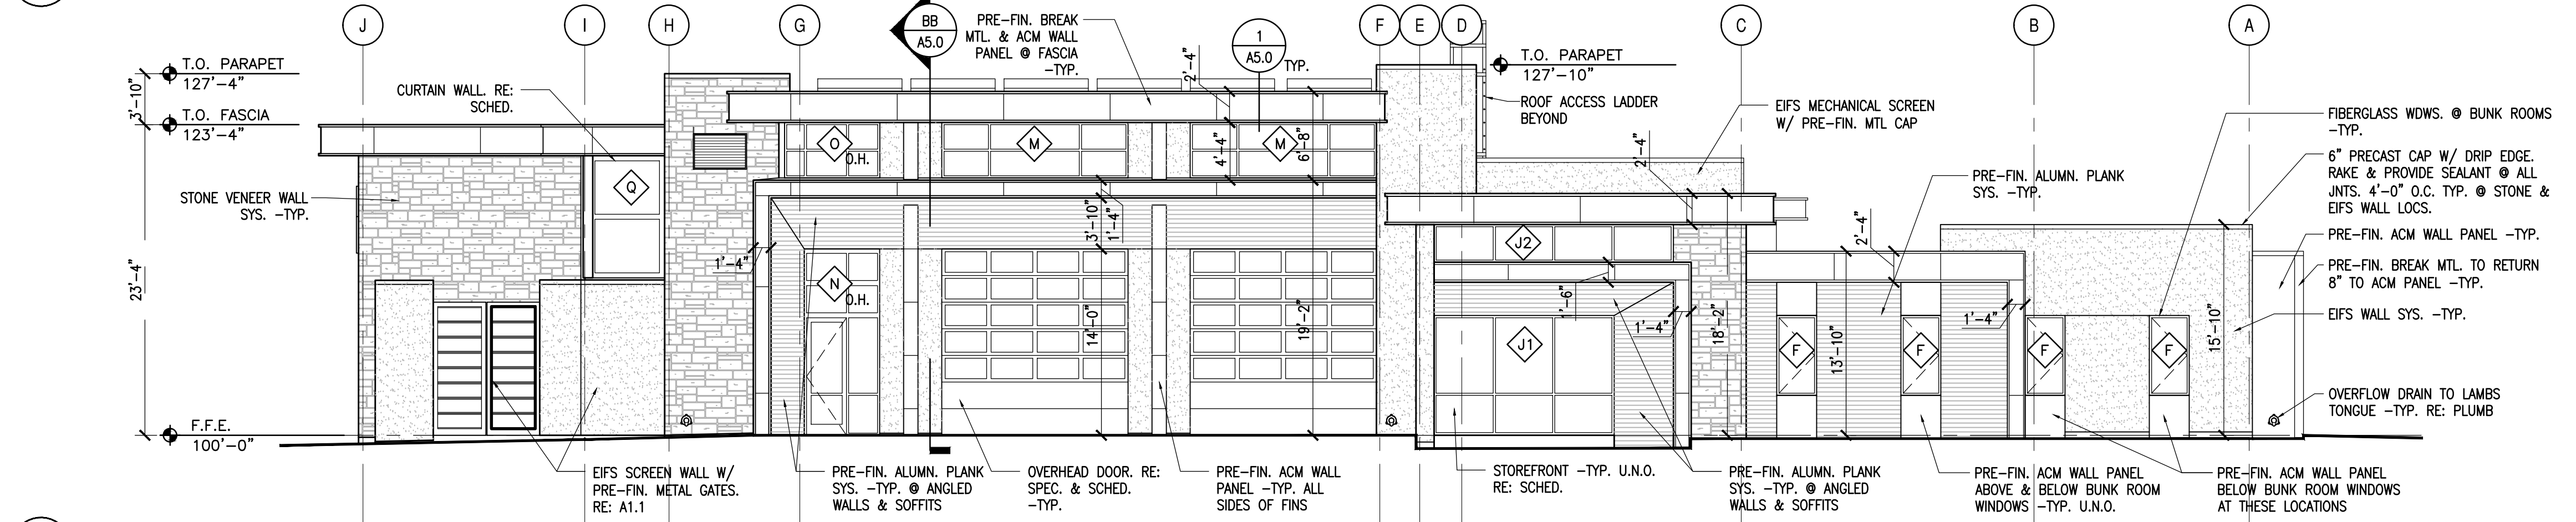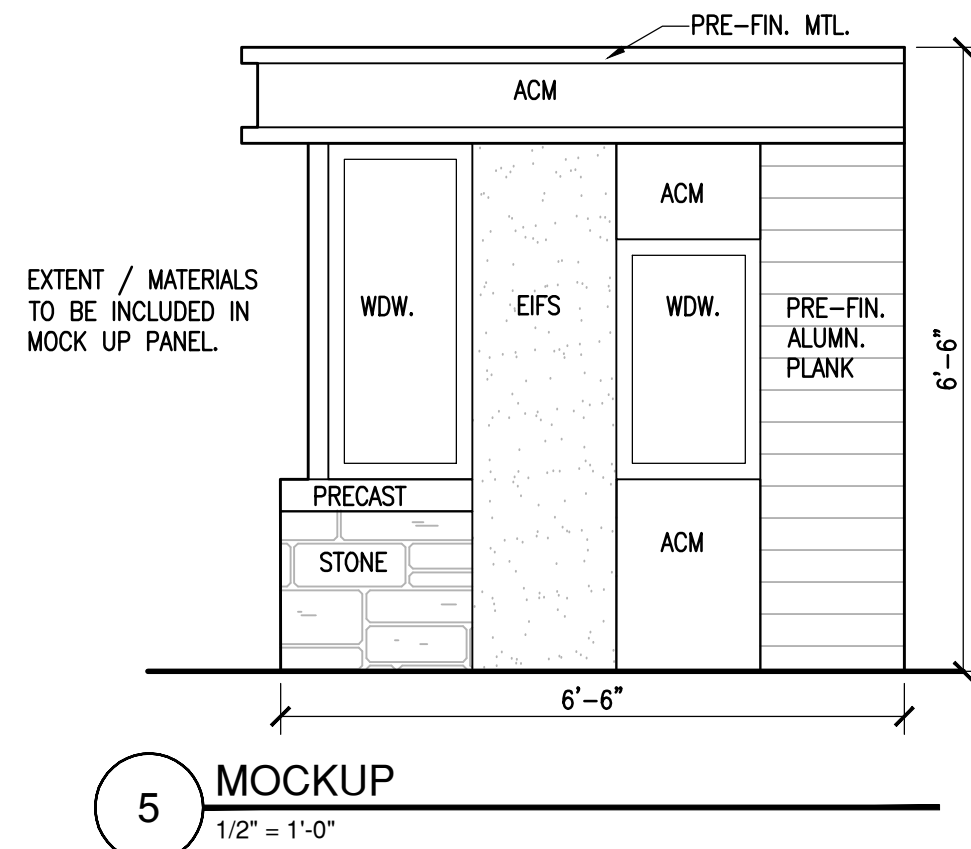
4 WEST ELEVATION
1/8" = 1'-0"3 NORTH ELEVATION
1/8" = 1'-0"5 MOCKUP
1/2" = 1'-0"


ELEVATION GENERAL NOTES

1. RE: SPECS FOR SPECIFIC FINISH INFO.
2. RE: A&O FOR DOOR & WINDOW INFO.
3. NO EXPOSED FOUNDATION WALL AT BUILDING WALLS OR SITE SCREEN WALLS-TYP. COORDINATE LOCATION OF FINISHES WITH FINISH GRADE & DETAILS. RE: CIVIL.
4. NO EXPOSED CONDUIT, PIPING, WIRING, ETC. TO BE ON THE EXTERIOR WALLS OF THE BUILDING.


EXTERIOR FINISH LEGEND

- PRE-FIN. ALUMN. PLANK WALL SYSTEM HORIZONTAL ORIENTATION
- EIFS WALL SYSTEM
- STONE VENEER WALL SYSTEM
- PRE-FINISHED ACM METAL PANELS

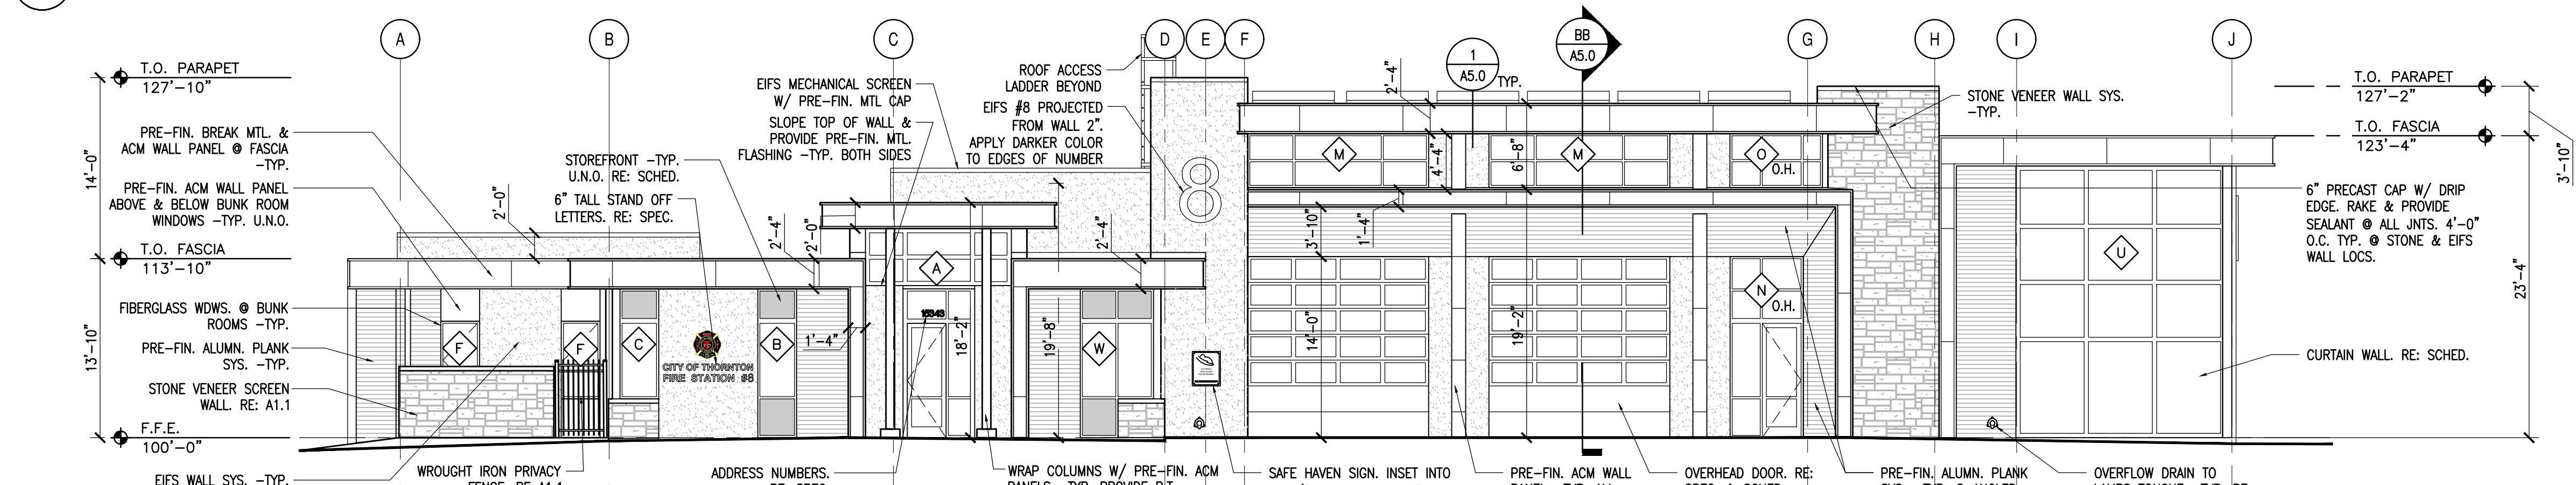
2 EAST ELEVATION
1/8" = 1'-0"1 SOUTH ELEVATION
1/8" = 1'-0"

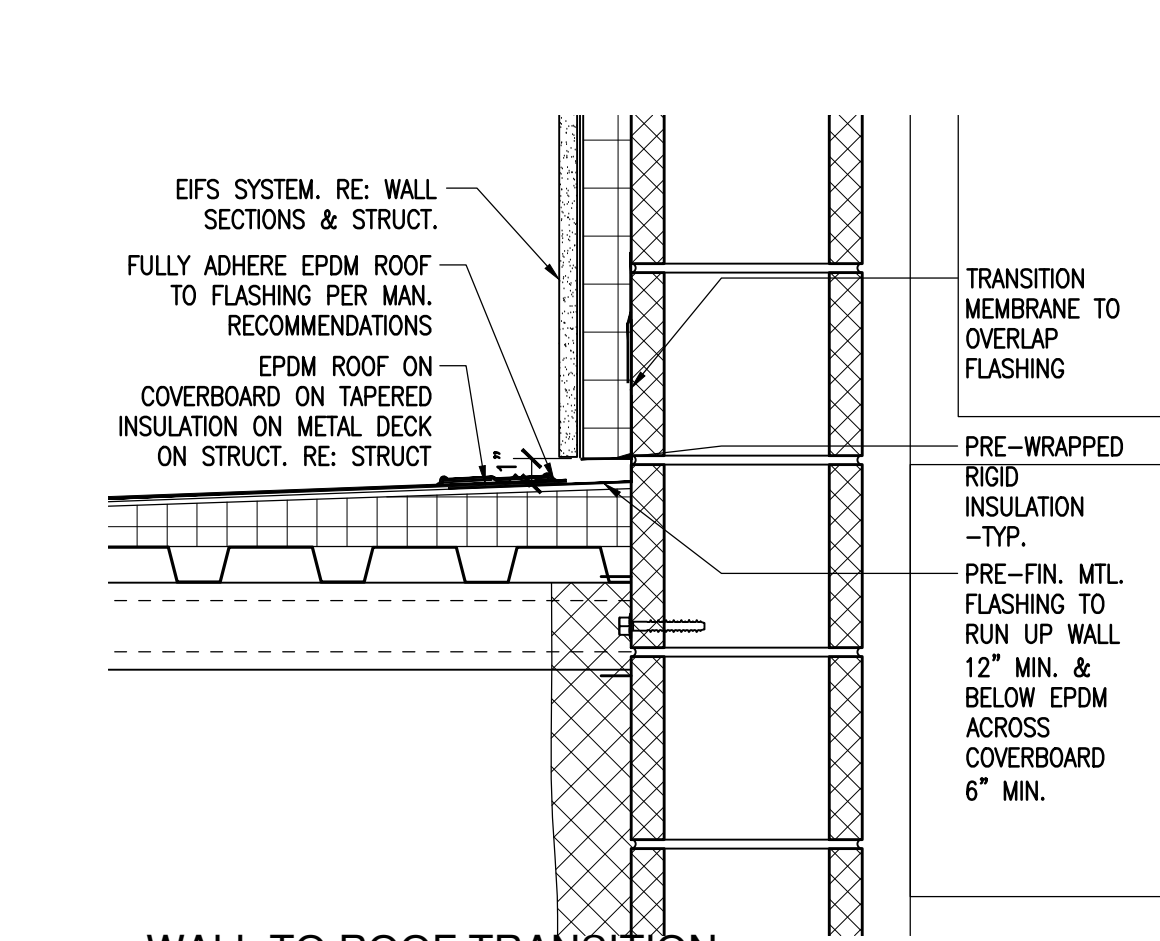


3 WALL TO ROOF TRANSITION AT APPARATUS BAYS (SIM @ ACM.)
SCALE: 1/2"=1'-0"

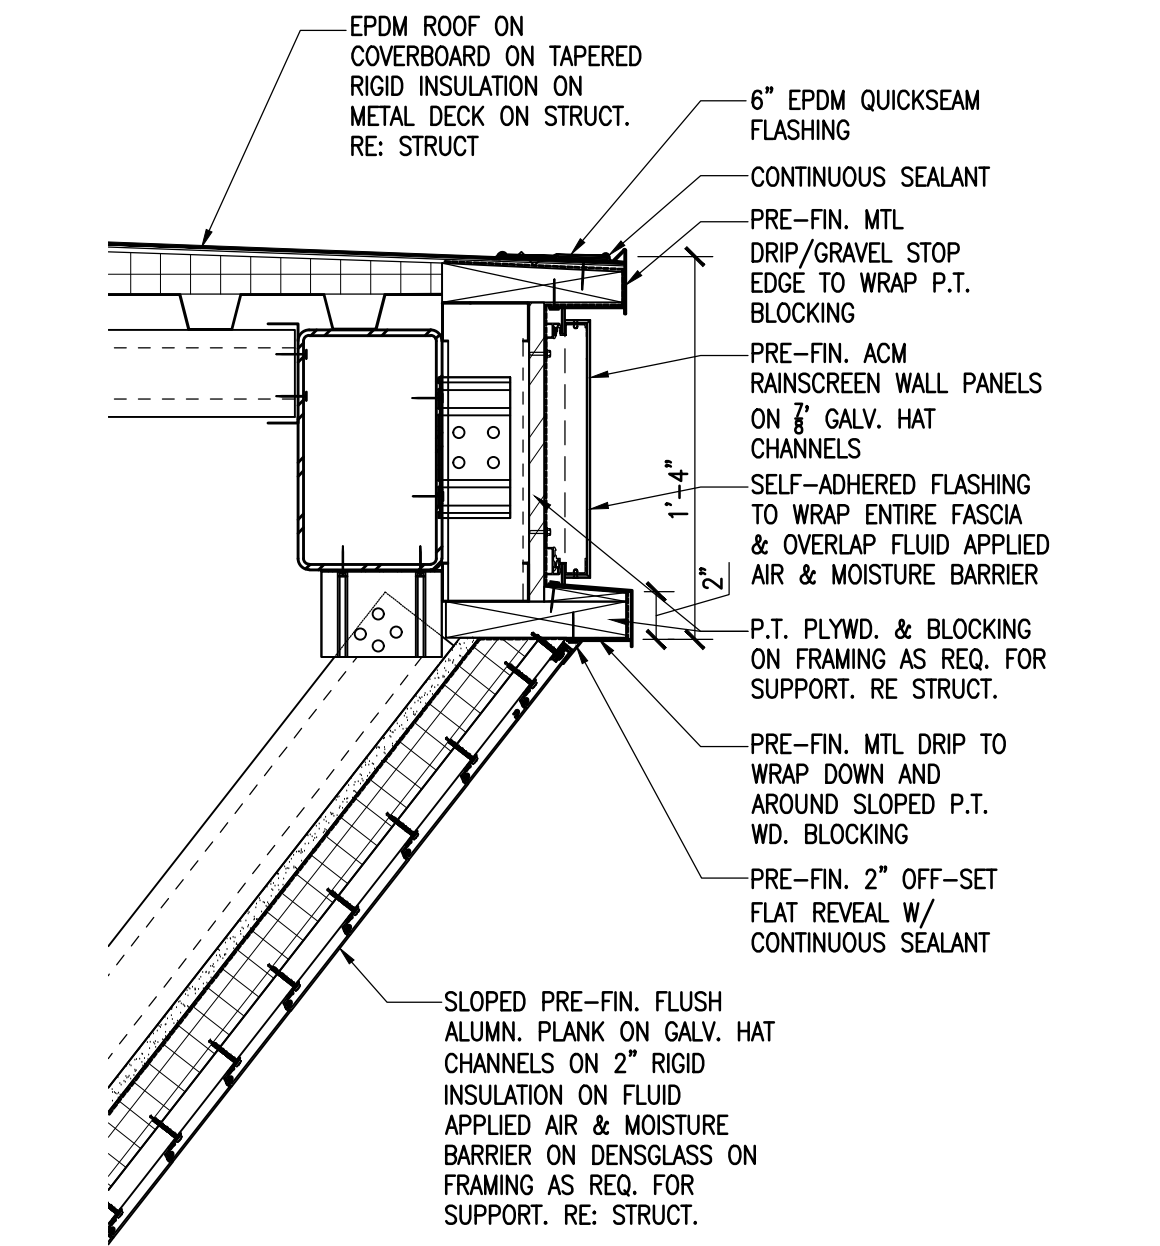


2 FASCIA TO ANGLED WALL DETAIL
SCALE: 1/2"=1'-0"

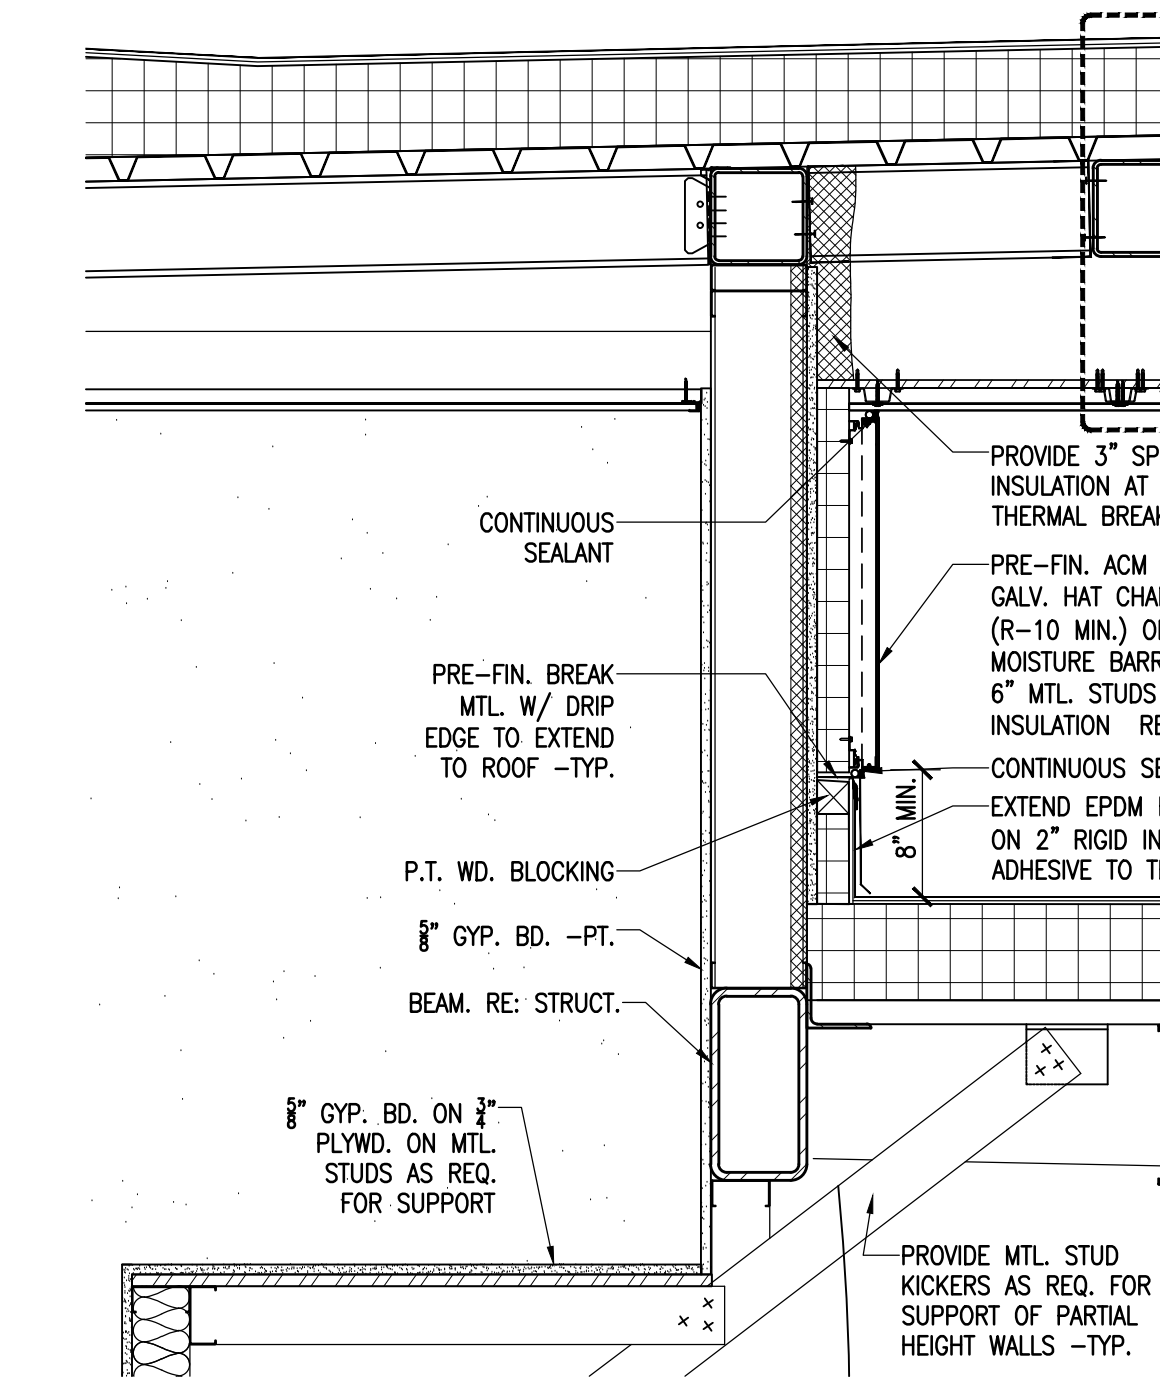


1 WALL TO ROOF AT POP-UP DETAIL
SCALE: 1/2"=1'-0"

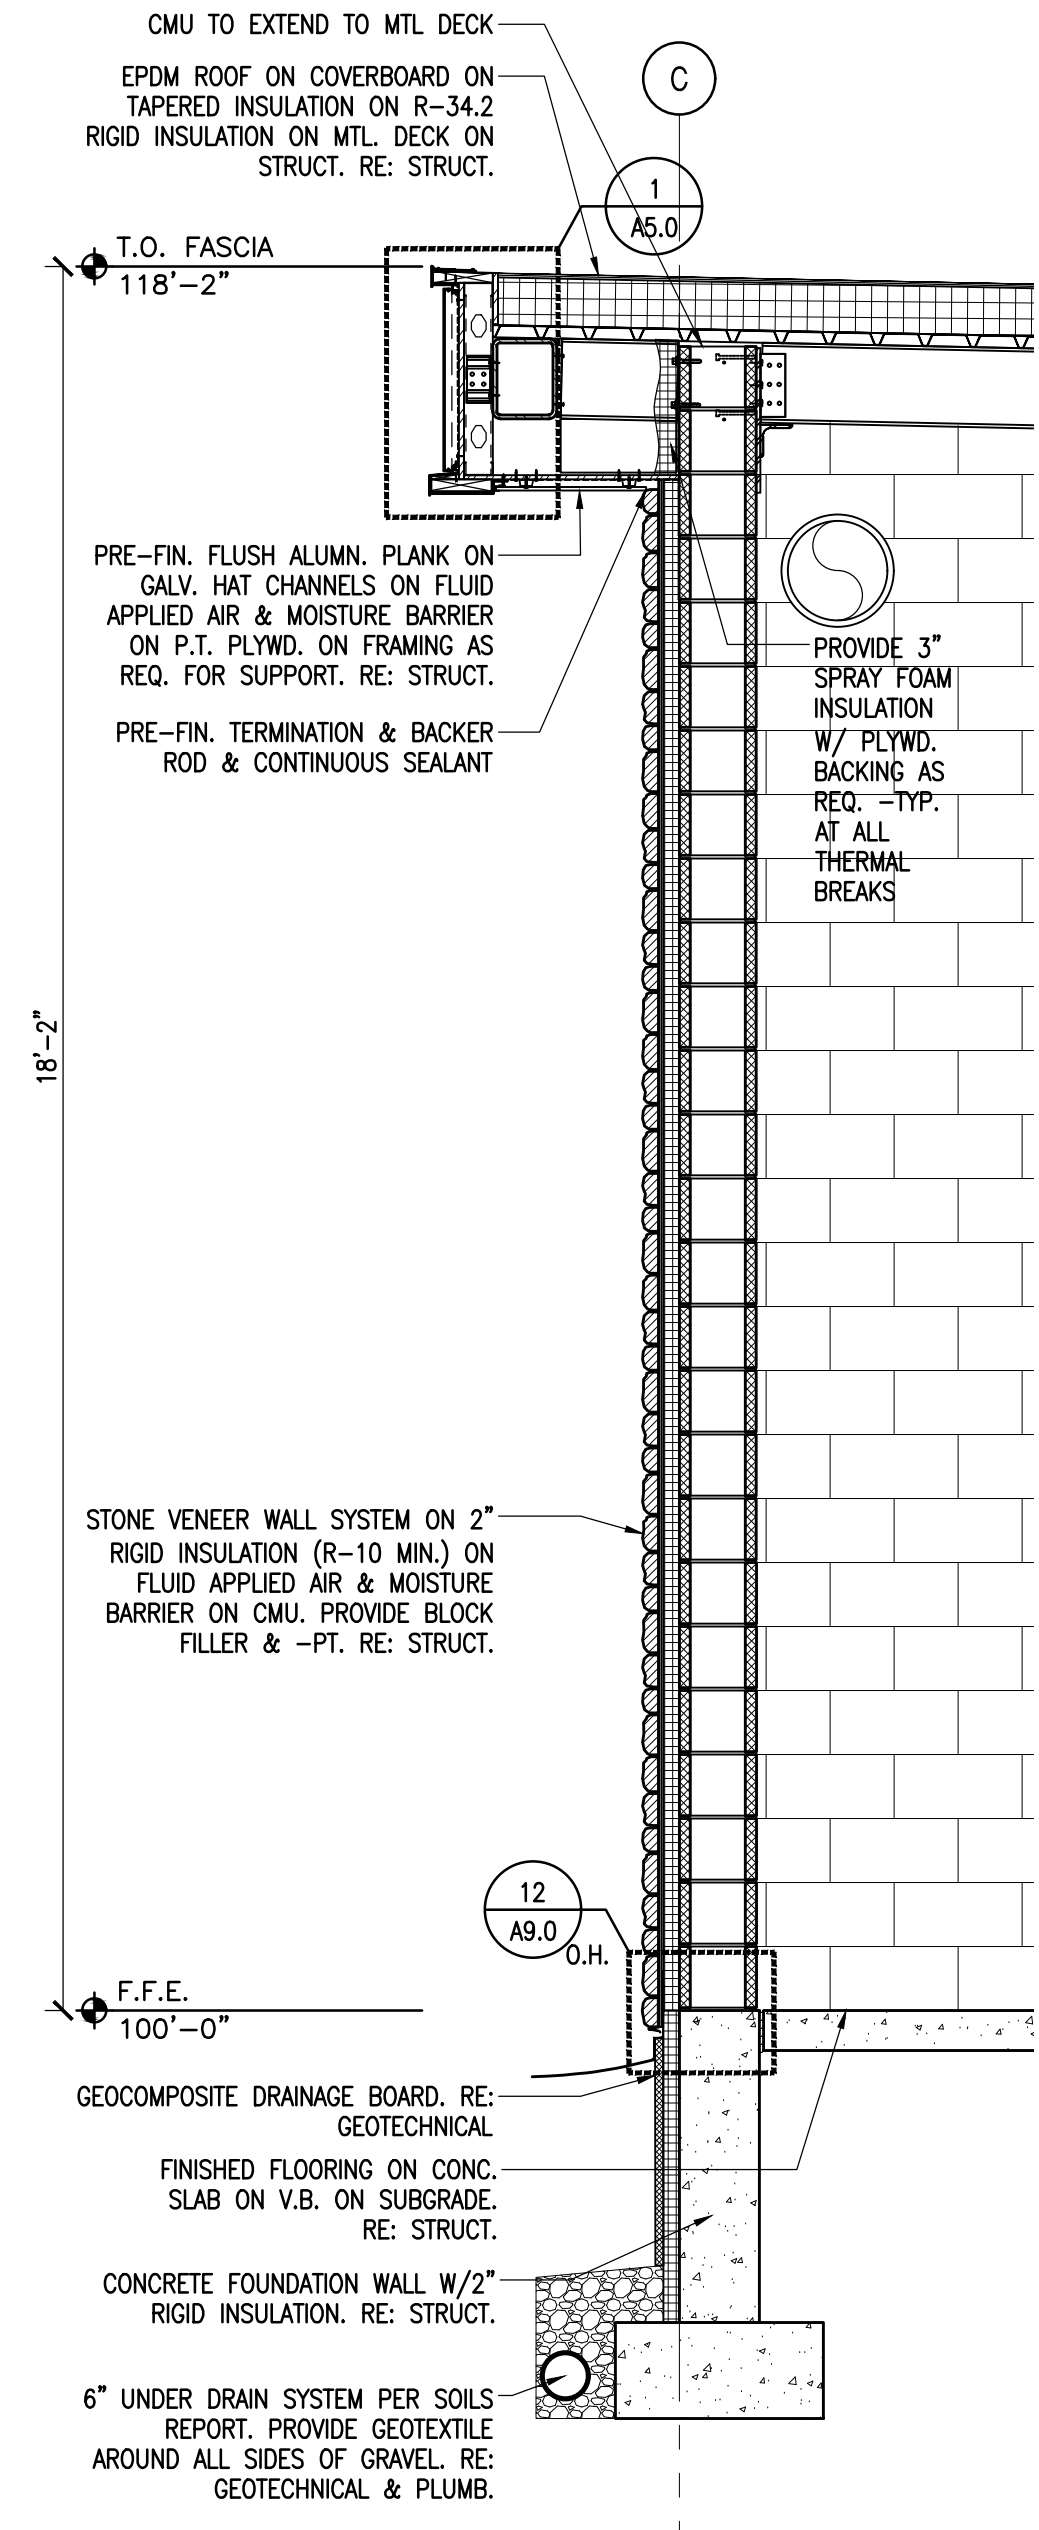


D BUILDING SECTION
SCALE: 1/2"=1'-0"

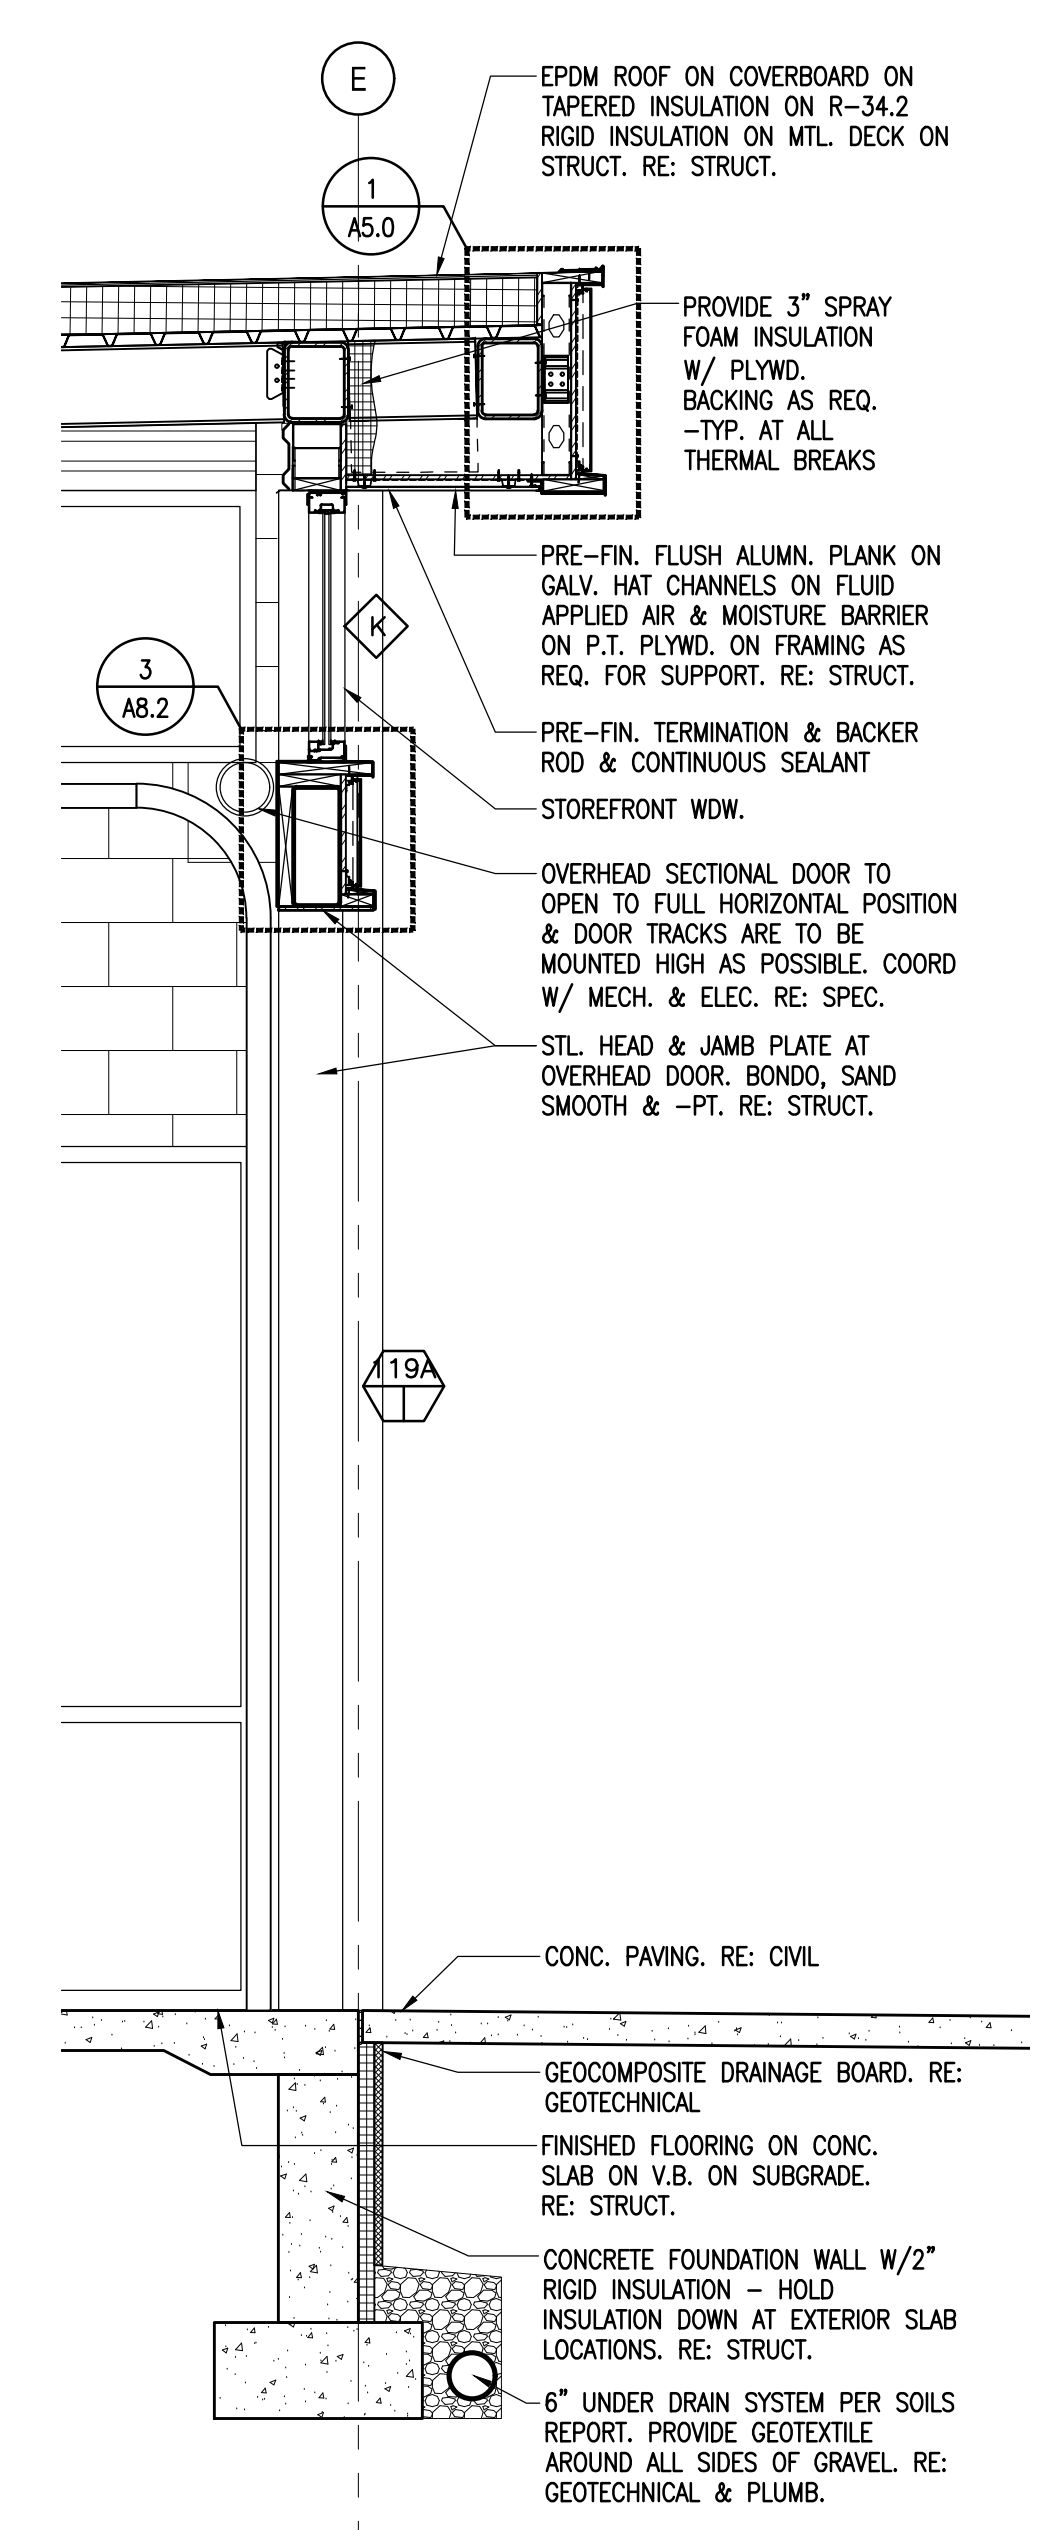


C BUILDING SECTION
SCALE: 1/2"=1'-0"

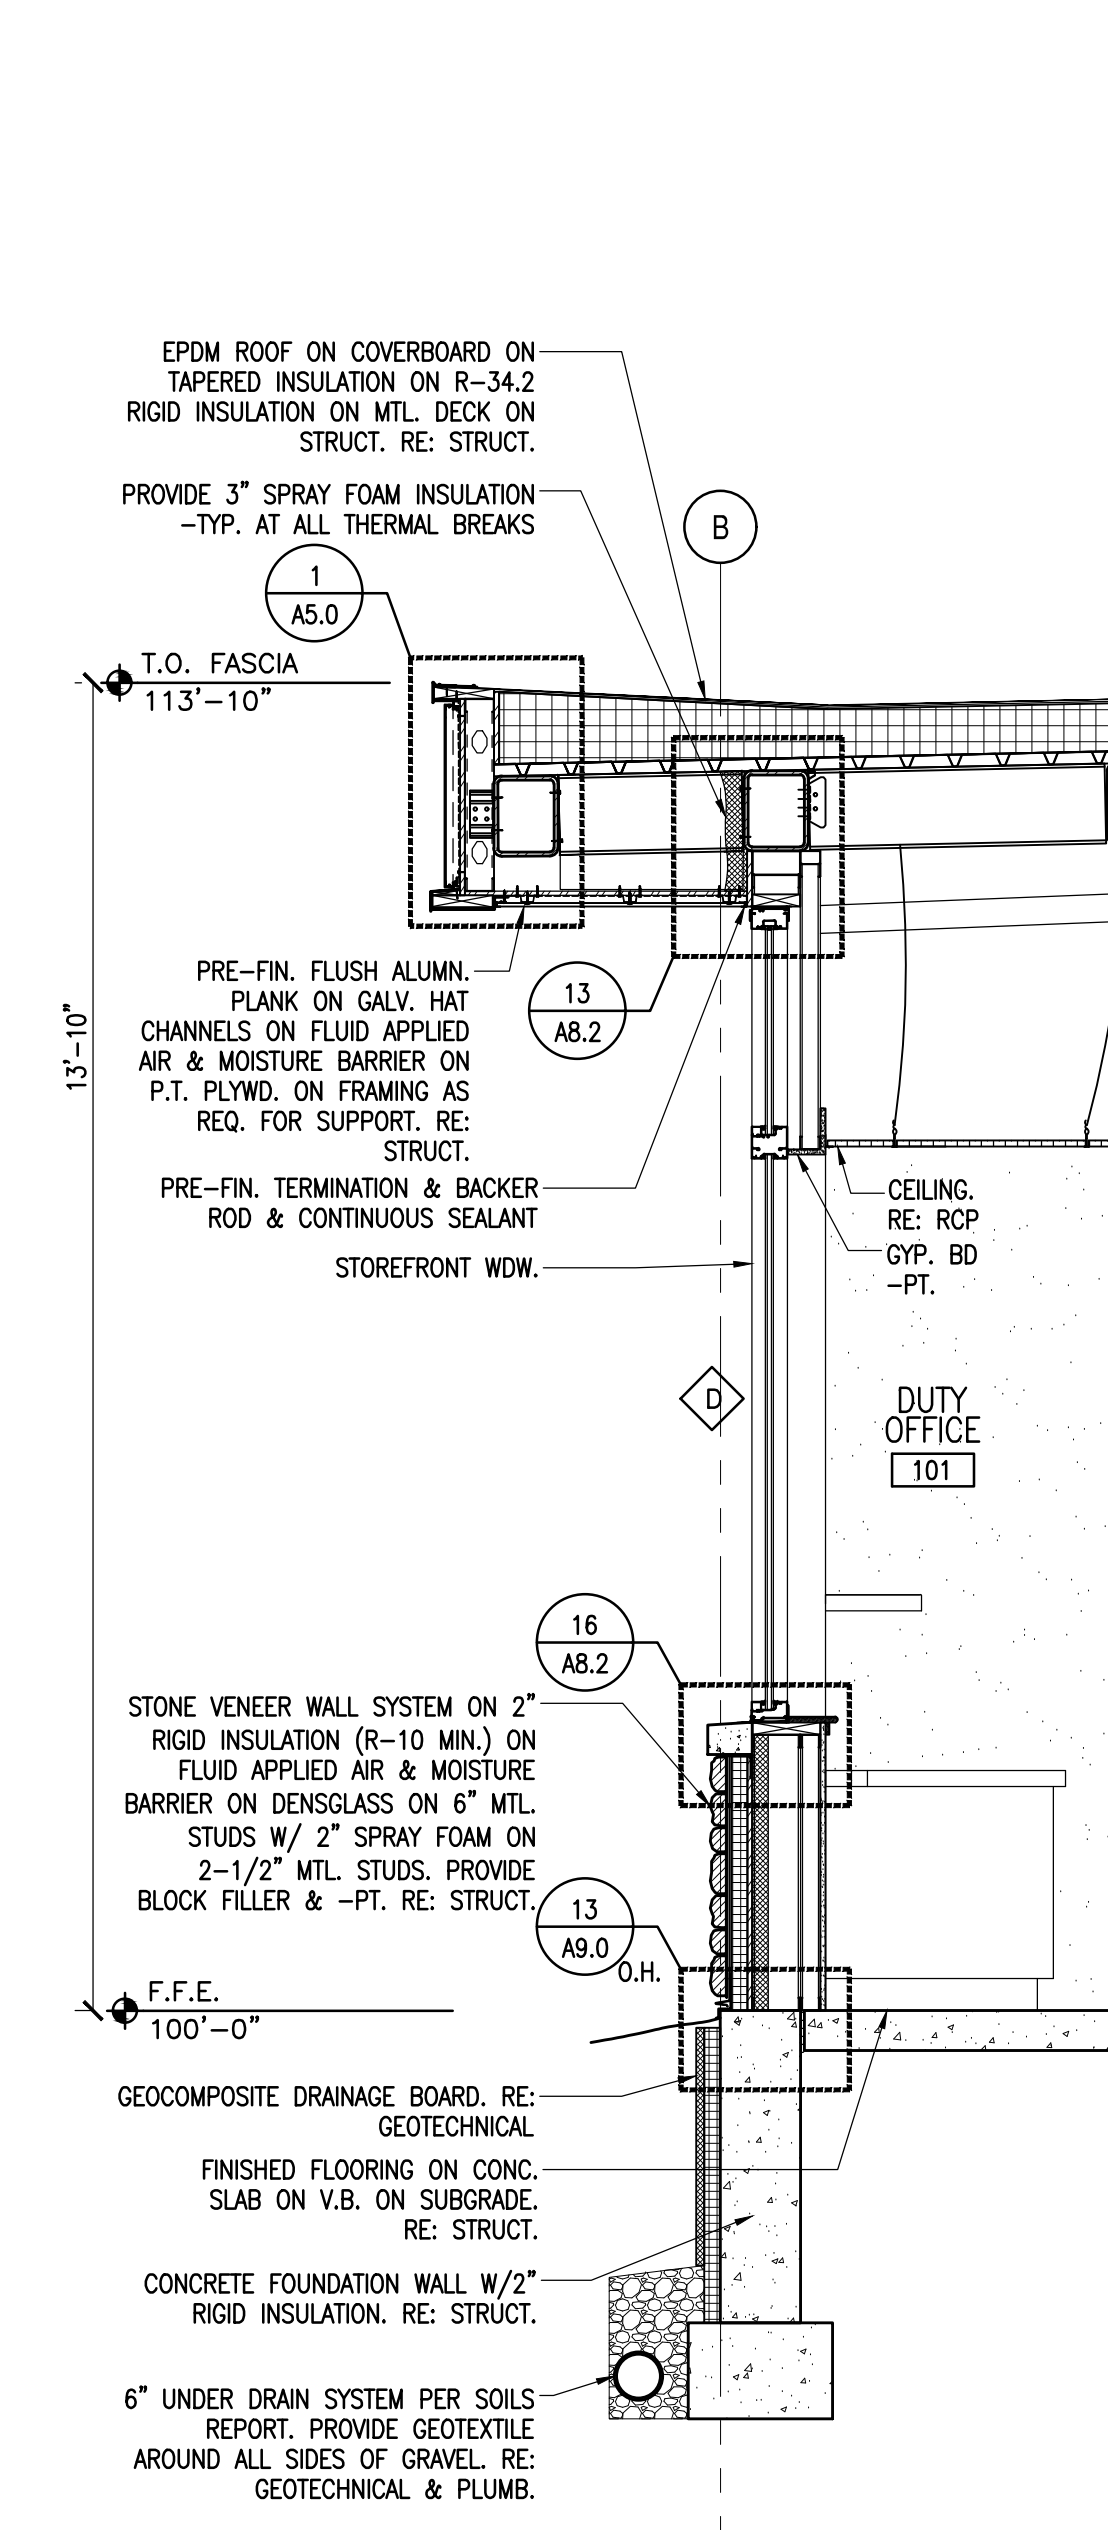


B BUILDING SECTION
SCALE: 1/2"=1'-0"

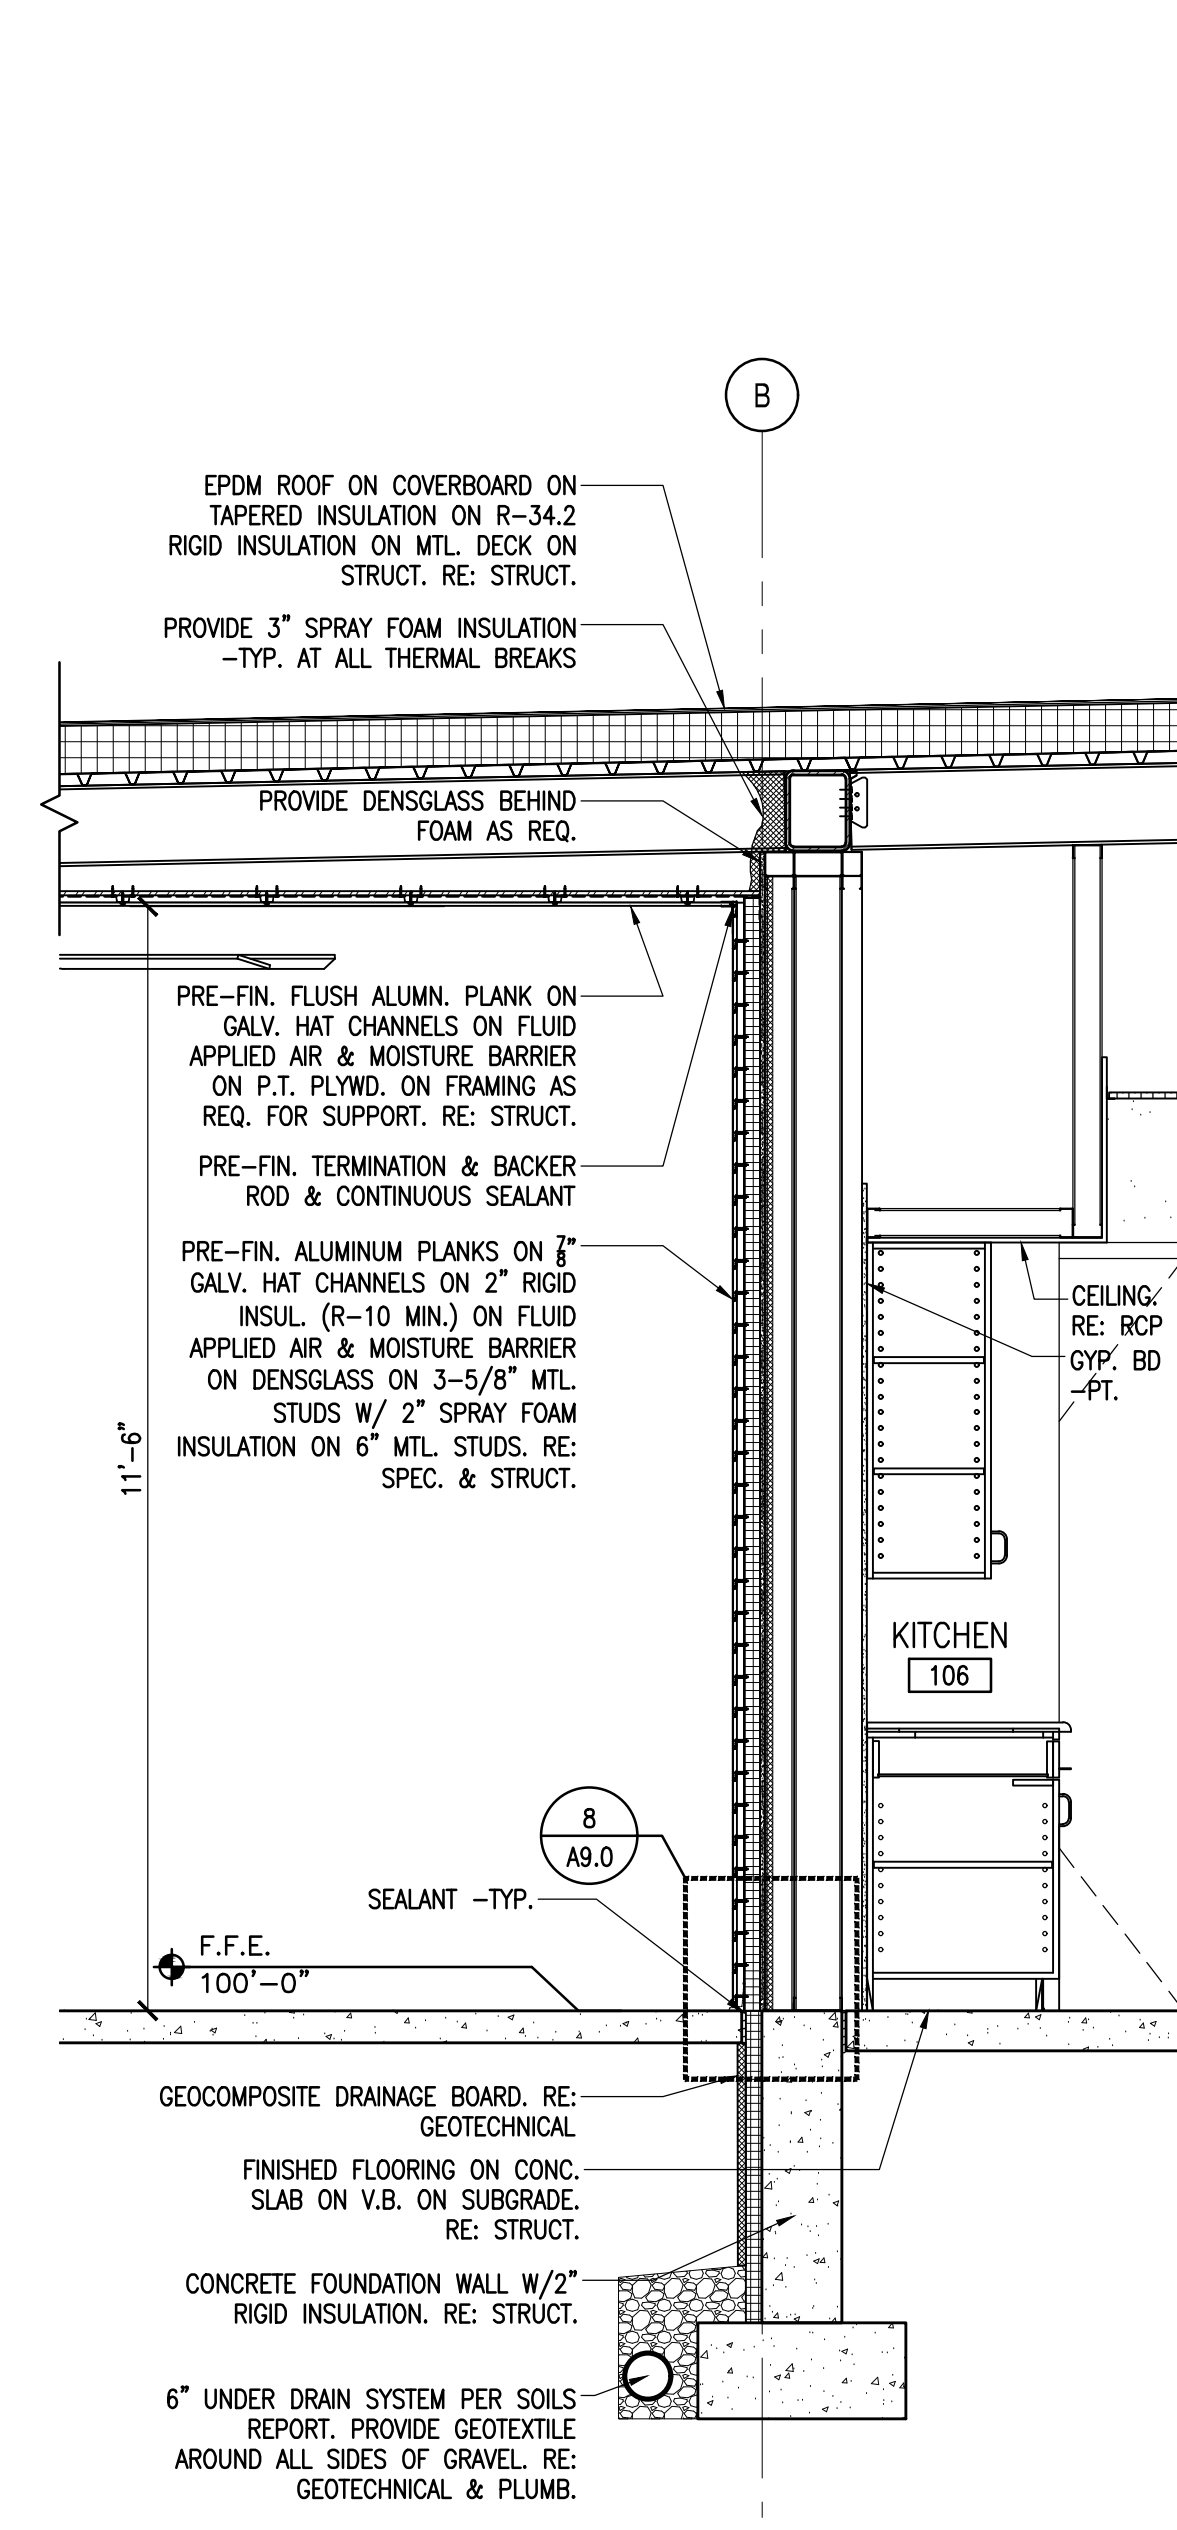

A BUILDING SECTION
SCALE: 1/2"=1'-0"

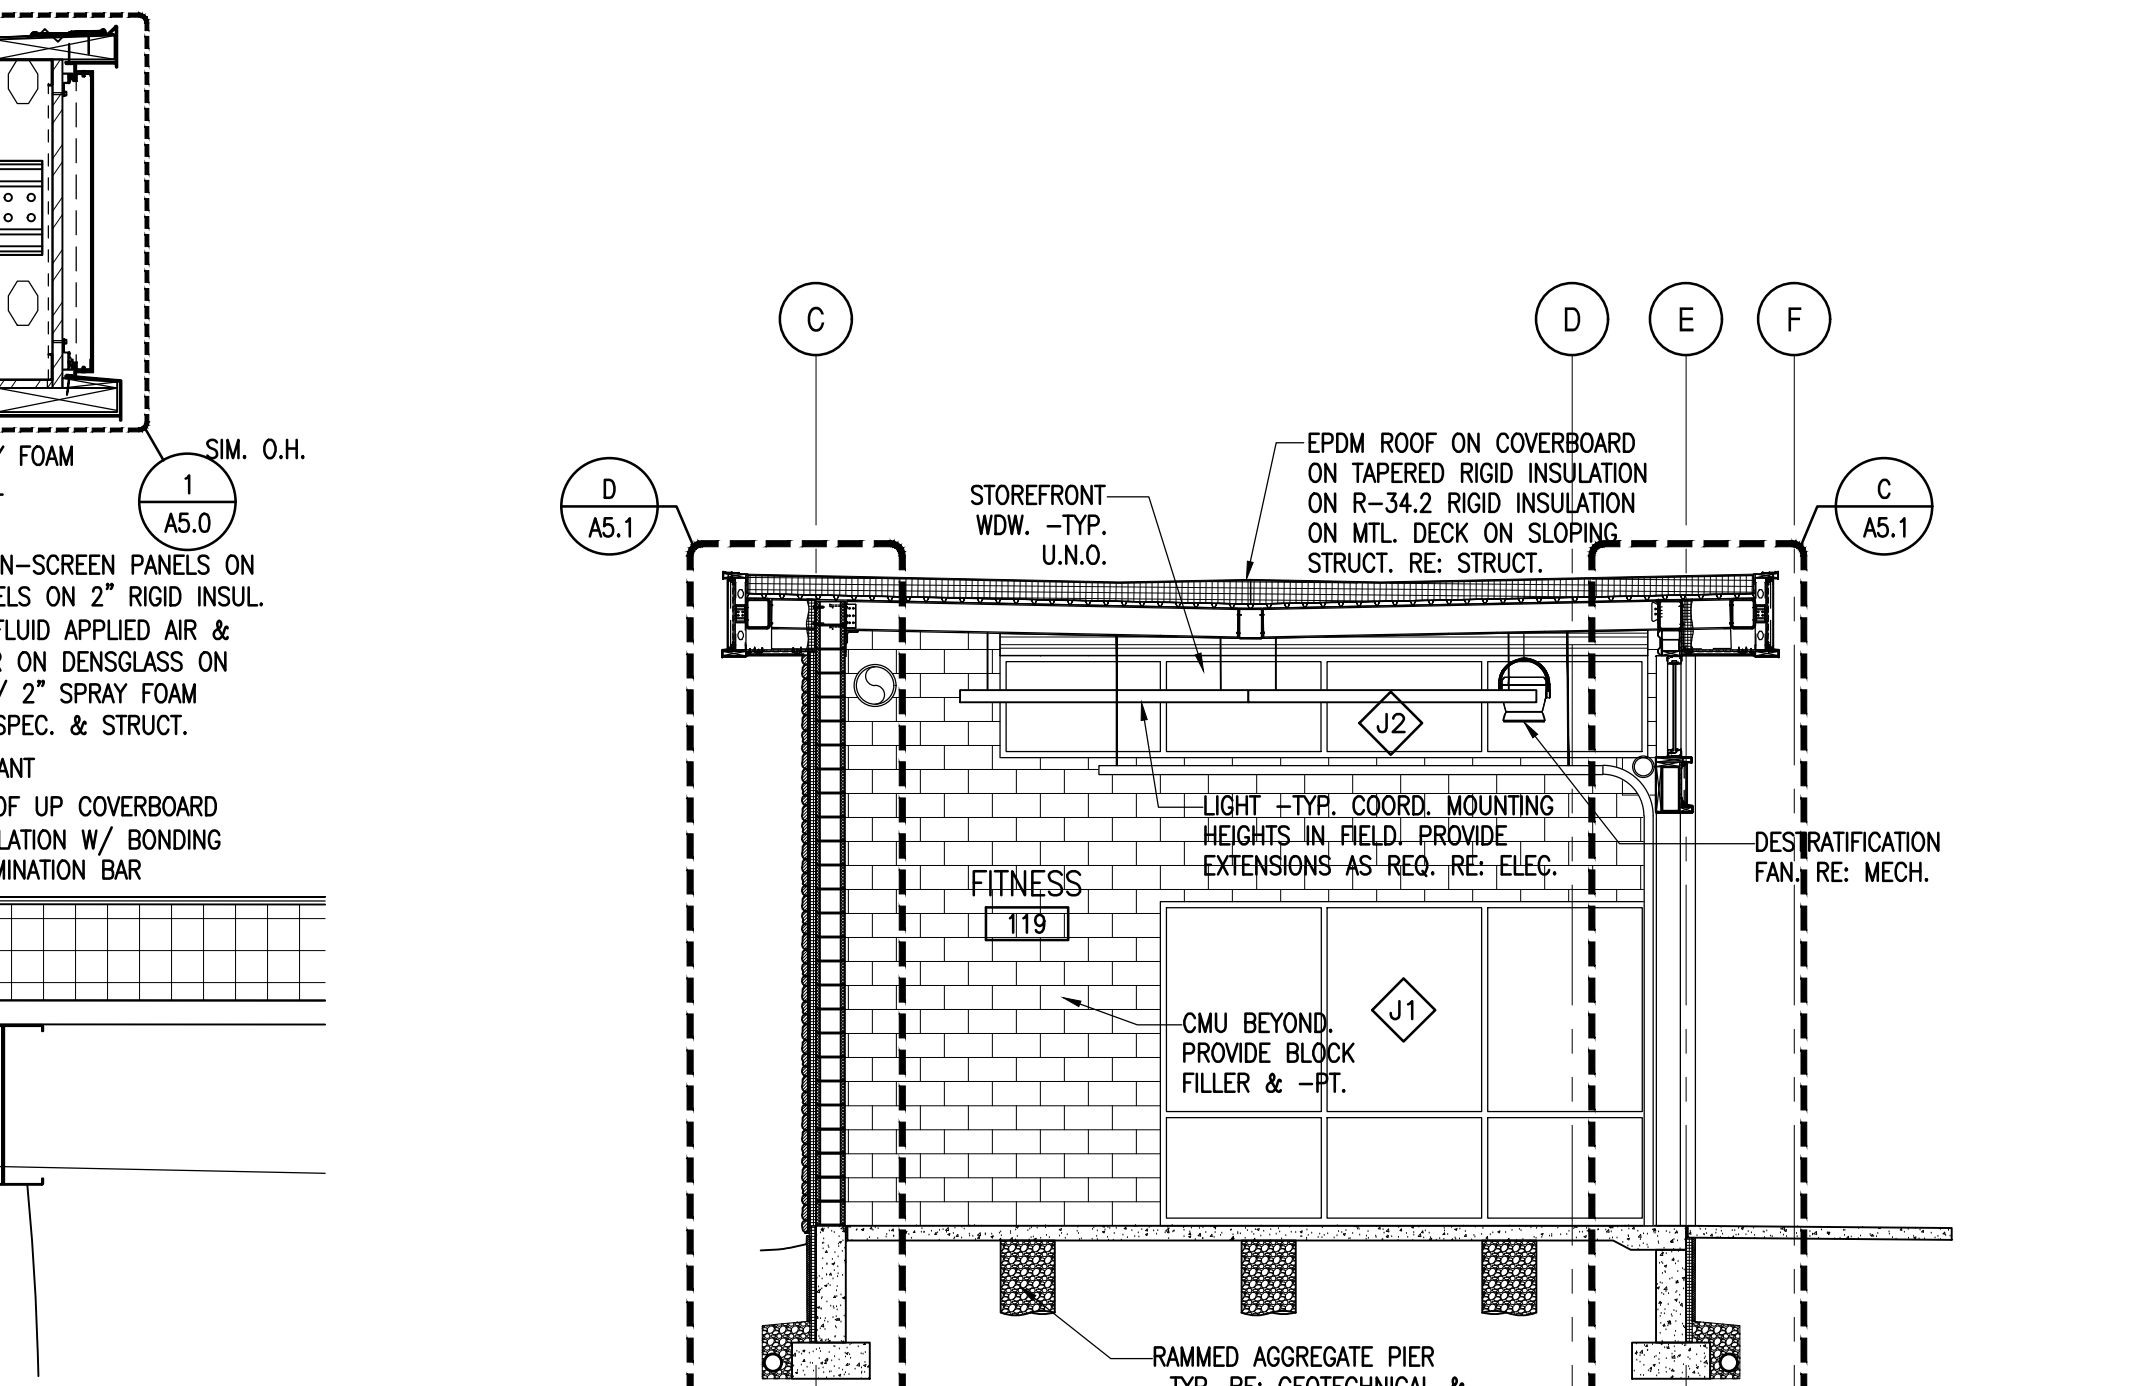

BB WALL SECTION
SCALE: 3/16"=1'-0"

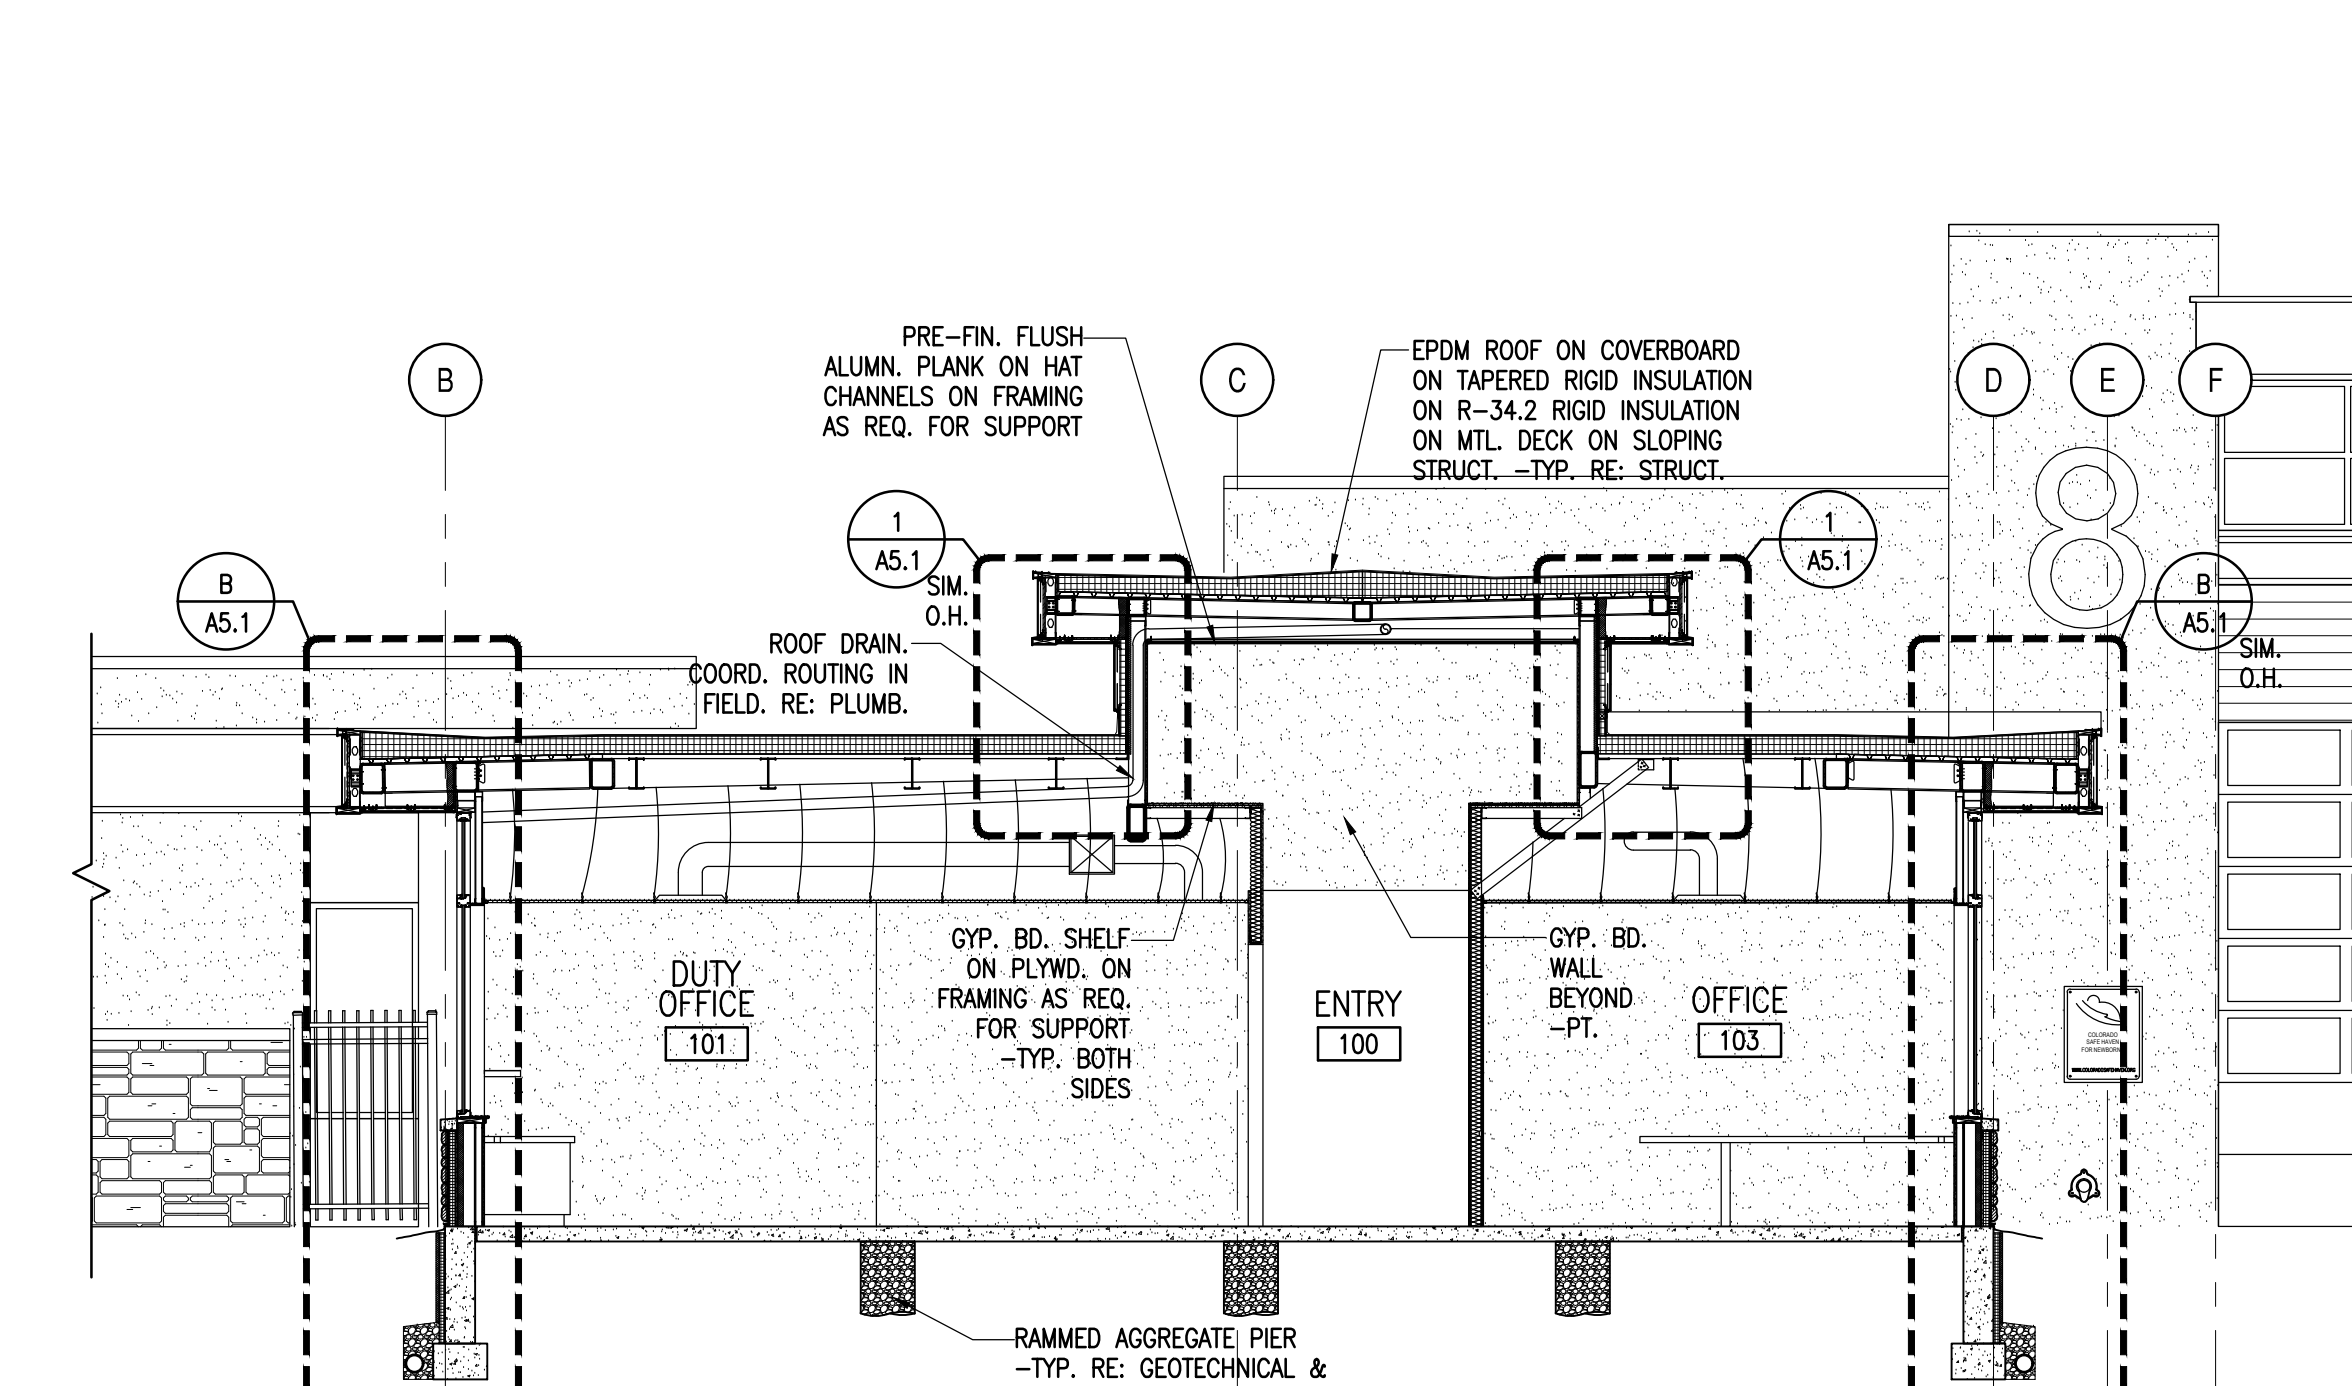

AA WALL SECTION
SCALE: 3/16"=1'-0"

ALLRED & ASSOCIATES

CITY OF THORNTON

FIRE STATION #8

15343 MONACO STREET

THORNTON, COLORADO 80602

ARCHITECTURE | PLANNING | INTERIOR DESIGN
559 BURBANK STREET, SUITE 125, BROOMFIELD, COLORADO 80020
PHONE: 303.465.4306
www.allredarch.com




BID SET • JOB NO. 2309

REVISION NAME	DATE

ISSUE DATE: 2024 0927

BLDG. & WALL SECTIONS

A5.1

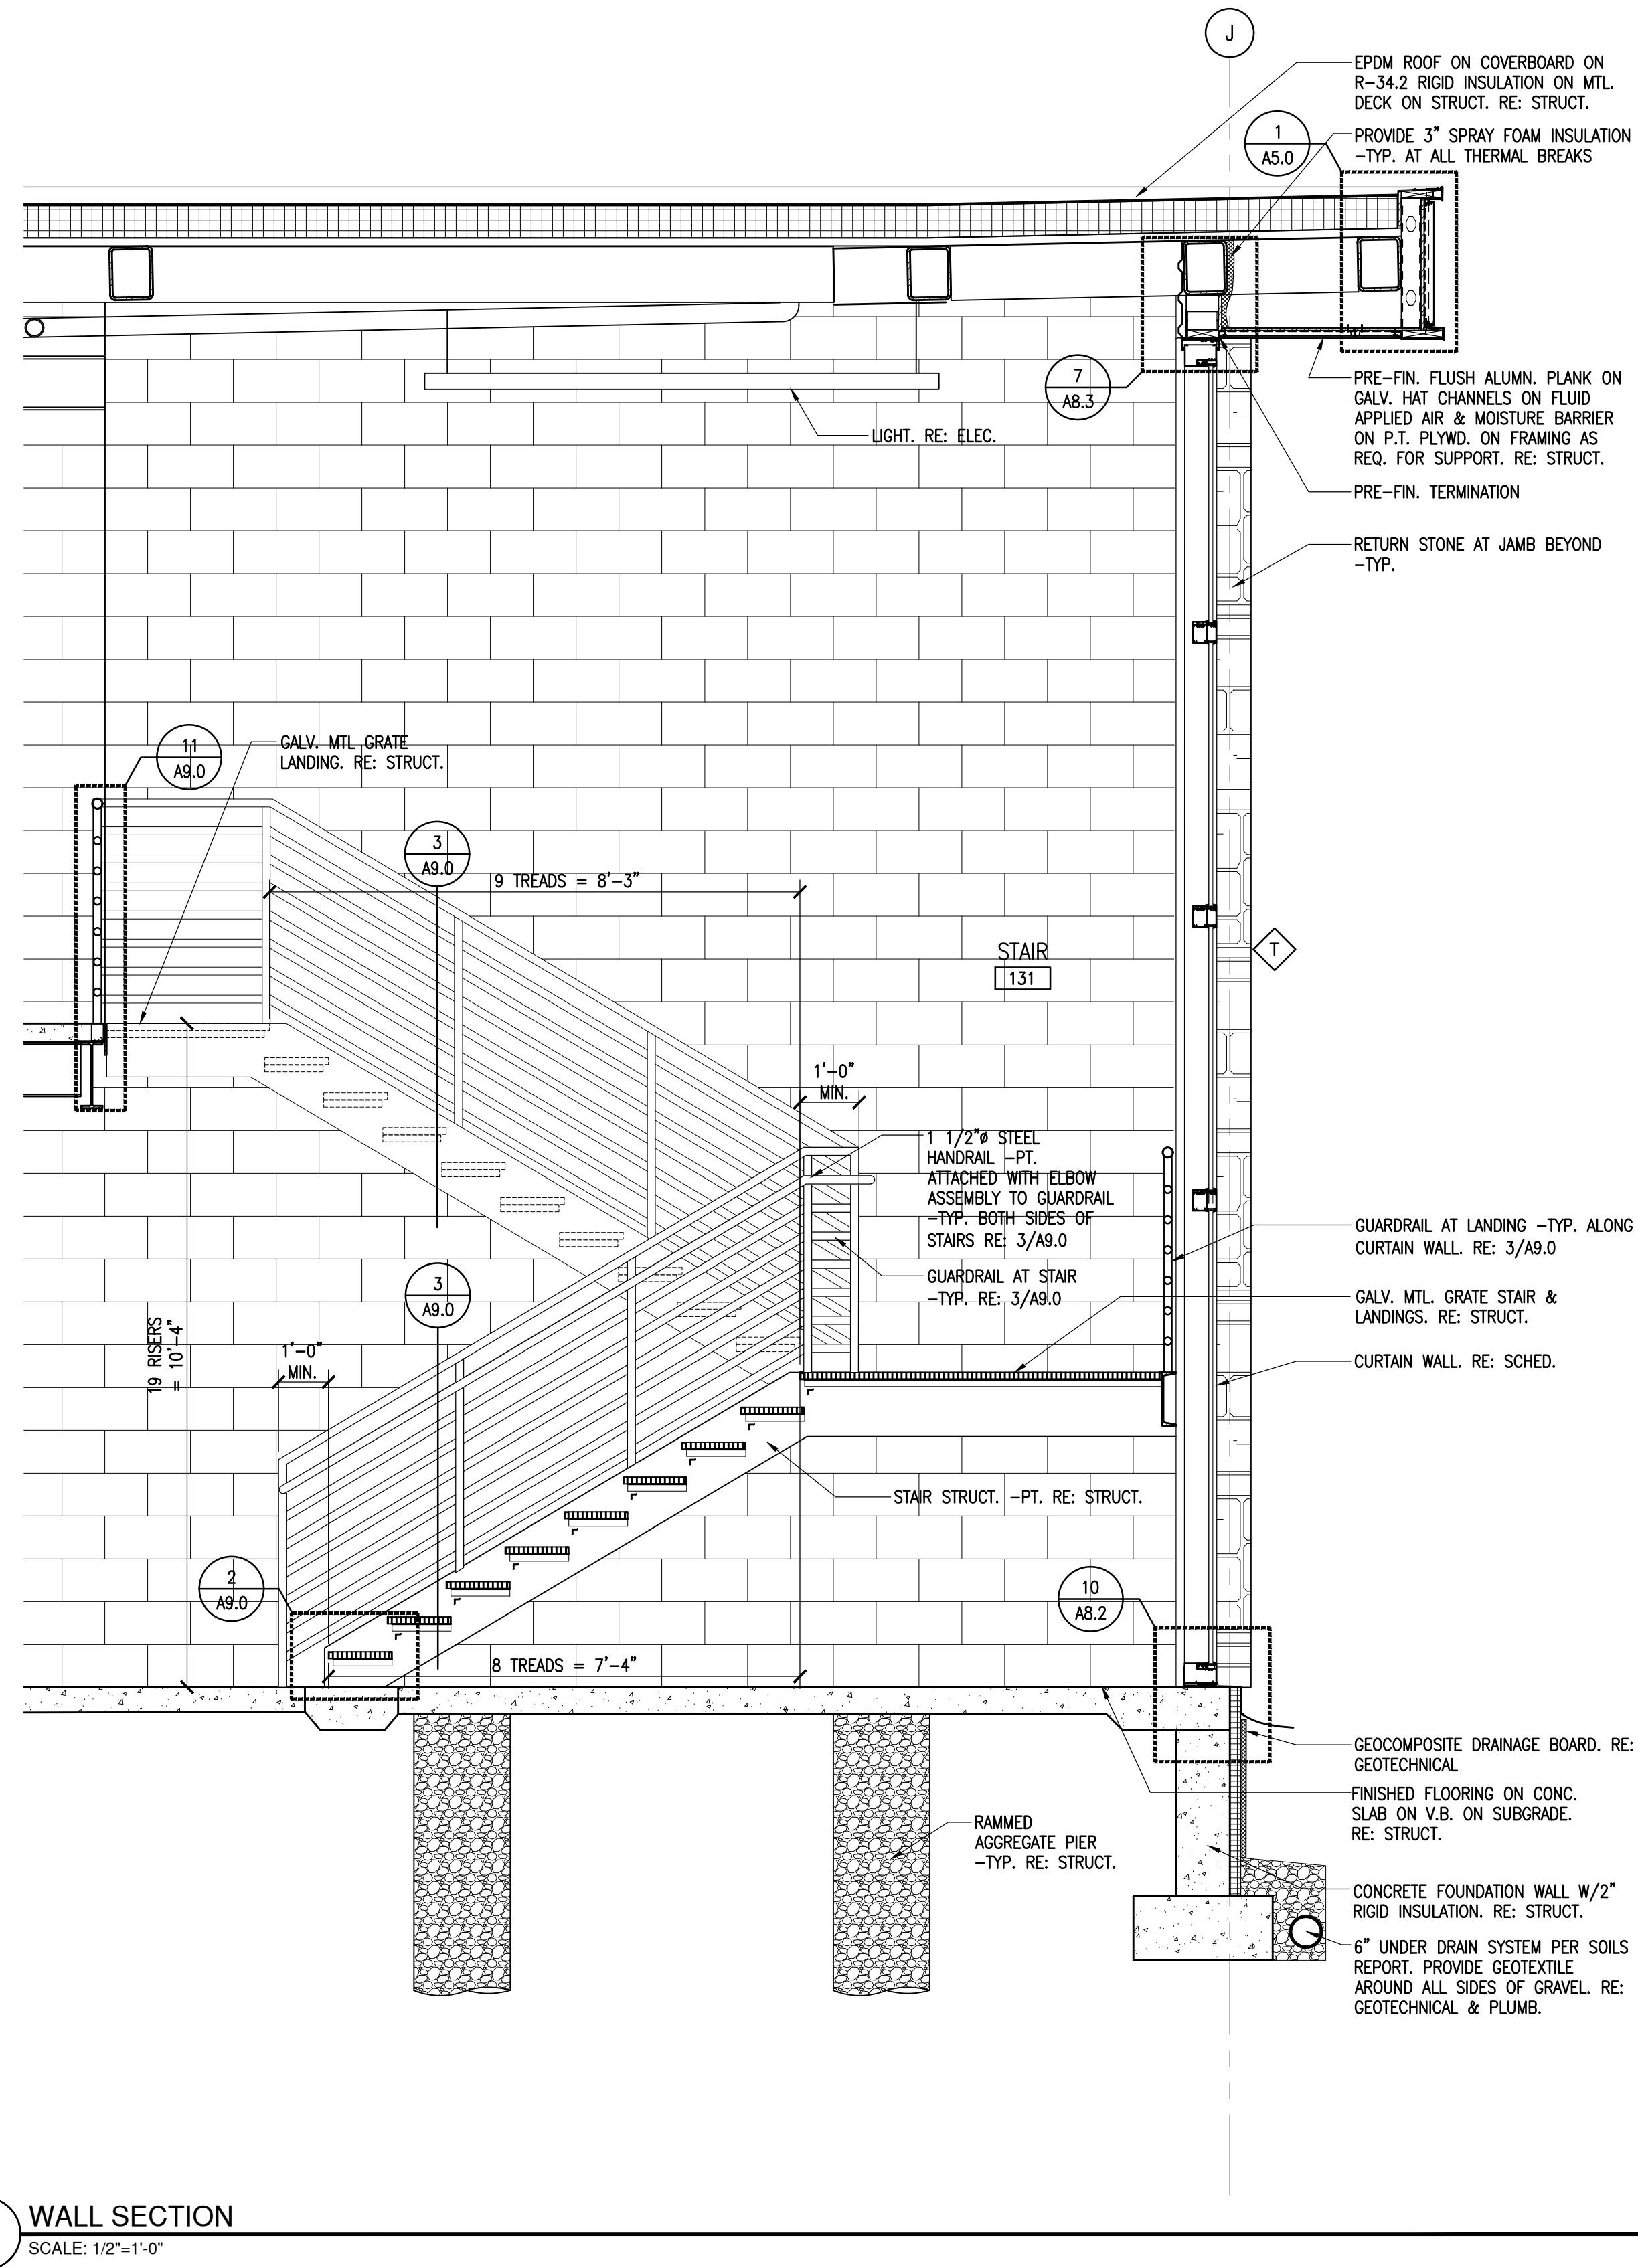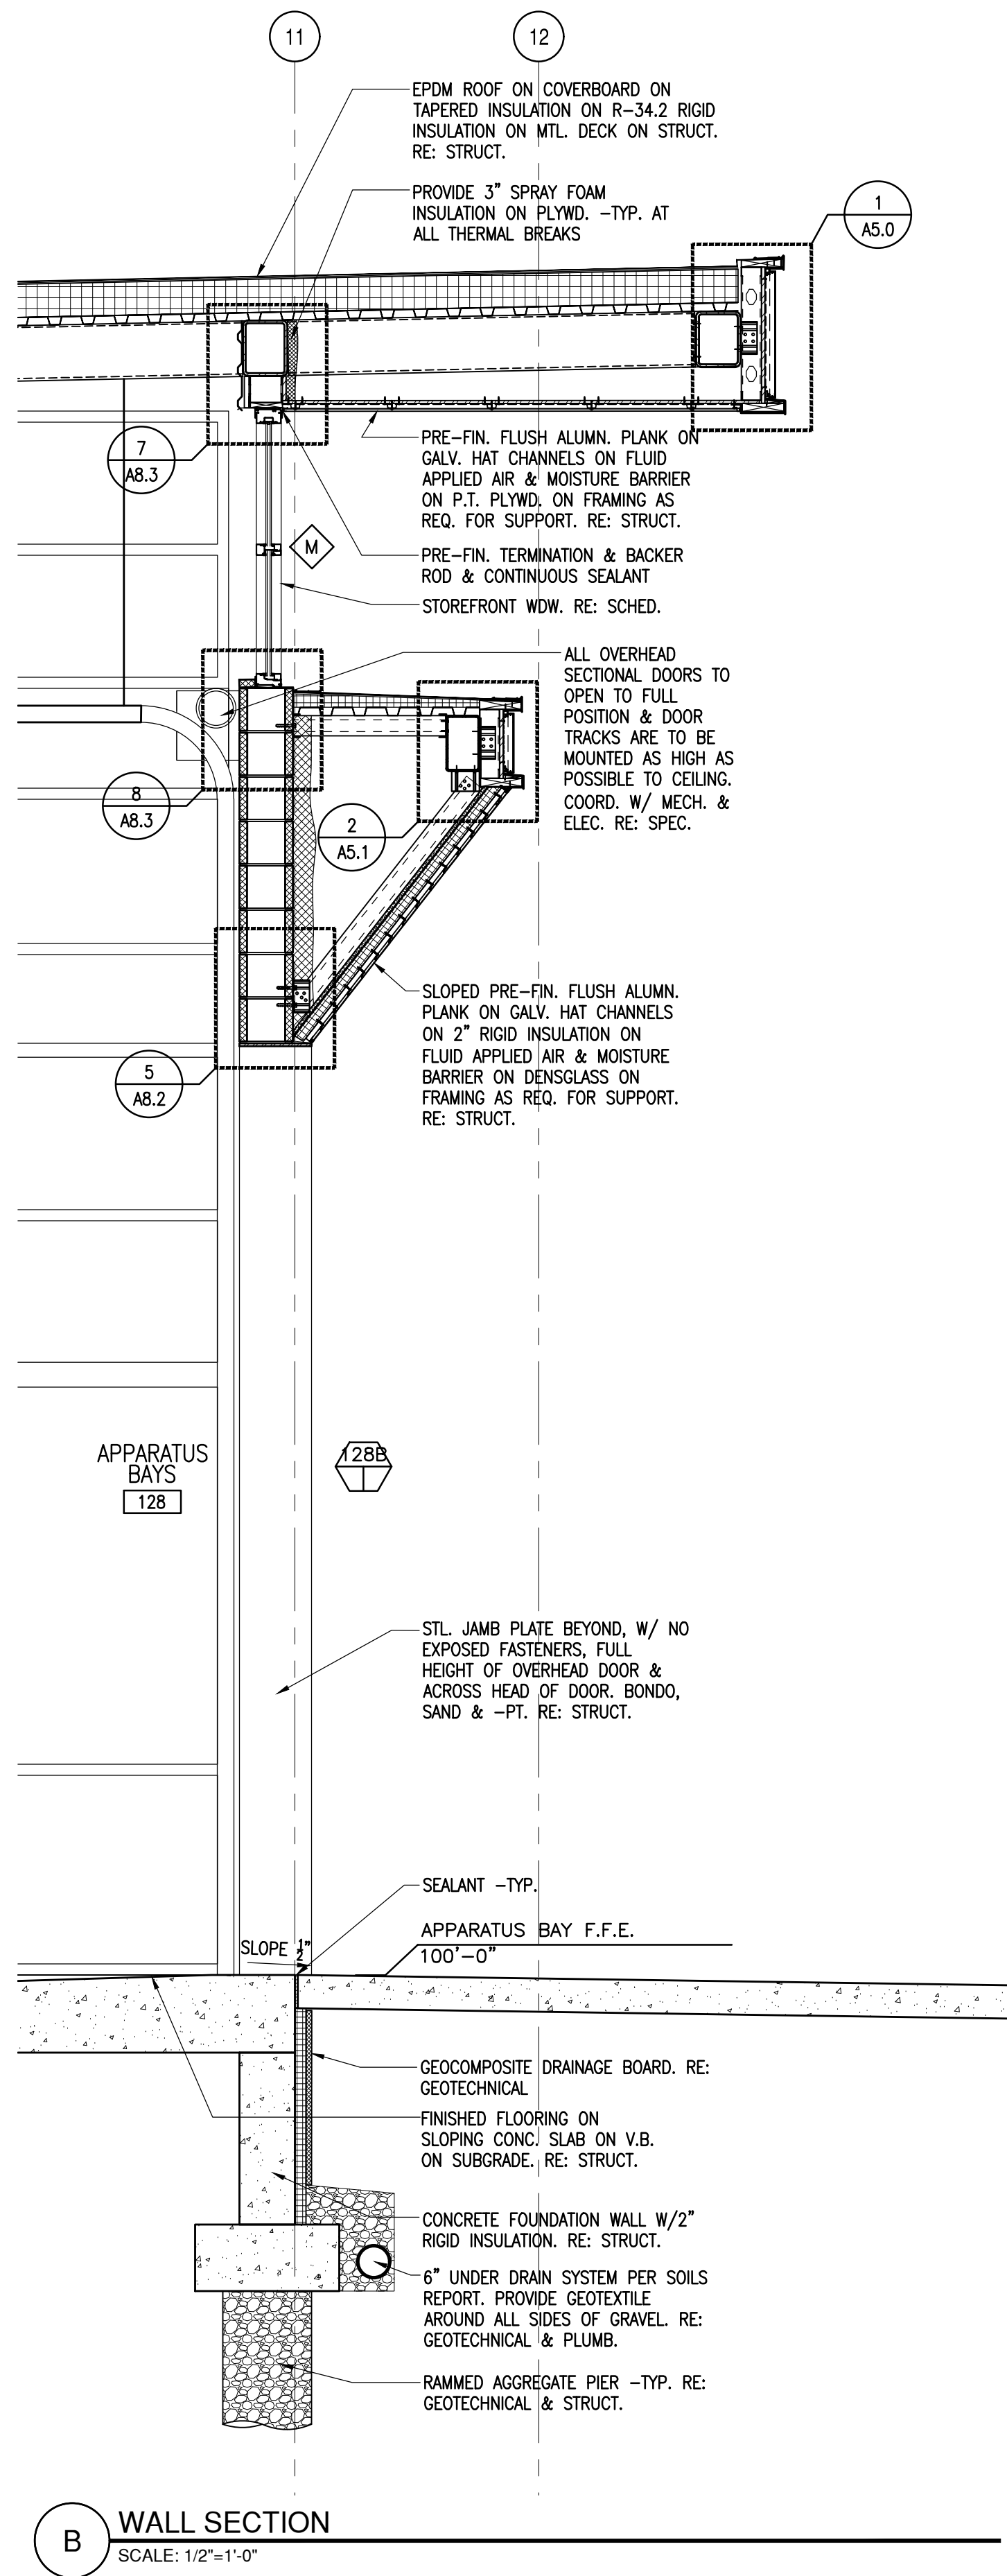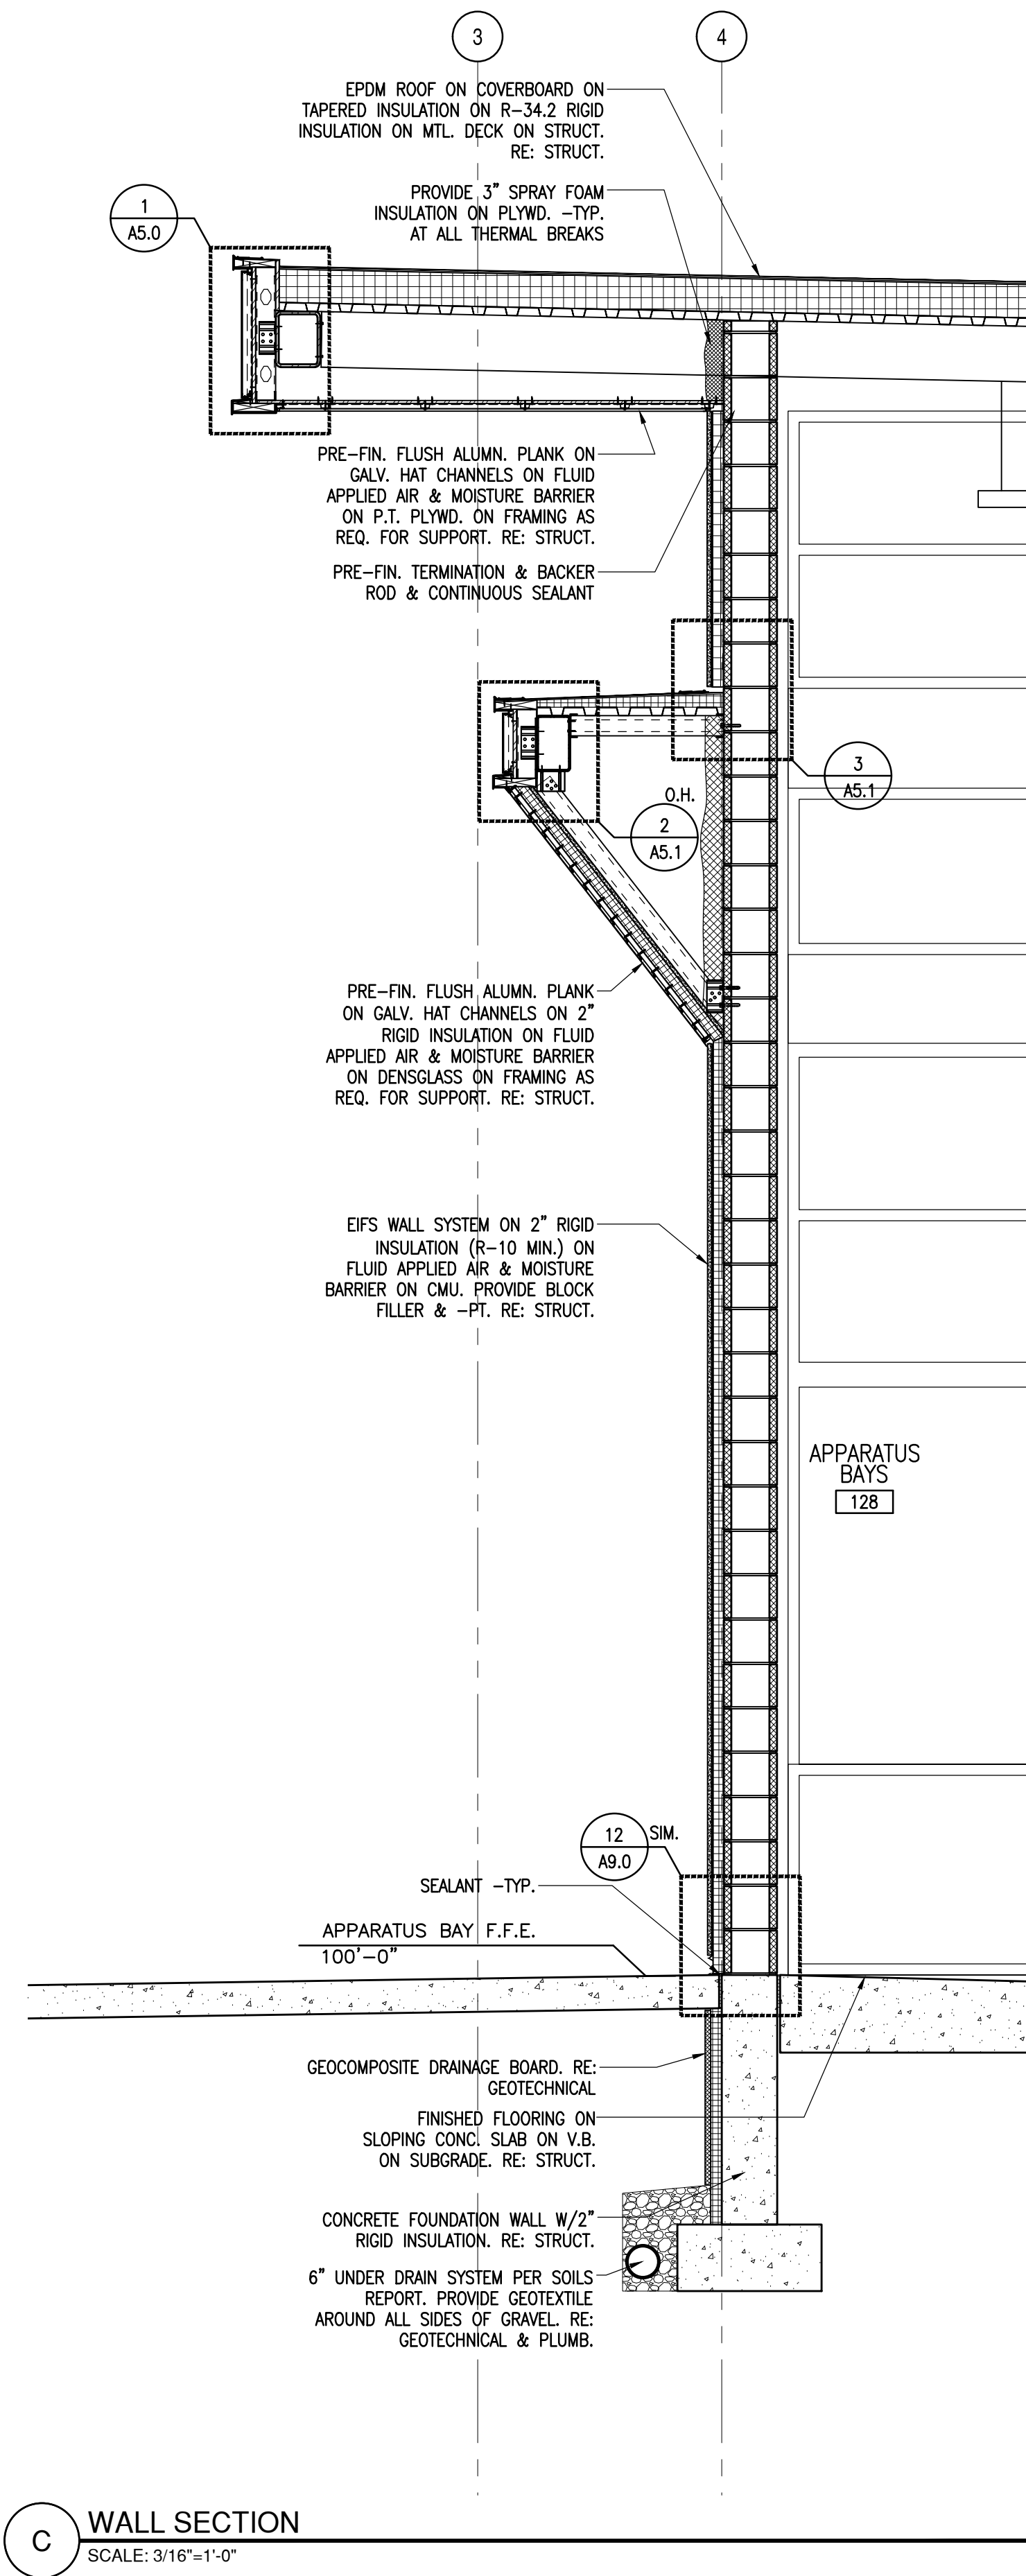


REVISION NAME	DATE

ISSUE DATE: 2024.09.27

FINISH SCHEDULE	
WALL FINISH SPECIFICATION:	WALL BASE SPECIFICATION:
(P1) PAINT FINISH: ALL PAINTABLE WALL AND SOFFIT GYP. BD. SURFACES TO RECEIVE: SHERWIN WILLIAMS. COLOR: EIDER WHITE; SW7014; SATIN	(B1) 4" PINNACLE, TYPE TS RUBBER BASE MAN. BY: ROPPE. COLOR: BLACK BROWN; 193
(P2) ACCENT PAINT FINISH: WALLS TO RECEIVE: SHERWIN WILLIAMS. COLOR: FUNCTIONAL GRAY; SW7024; SATIN	FLOOR FINISH SPECIFICATION:
(P3) ACCENT PAINT FINISH: WALLS TO RECEIVE: SHERWIN WILLIAMS. COLOR: MEDITERRANEA; SW7617; SATIN (PROVIDE EPOXY PT. AT CMU WALLS)	(F1) GRIND CONCRETE FLOOR WITH MULTIPLE GRITS & SEAL. RE. SPEC. PROVIDE MOCKUP FOR APPROVAL
(P4) ACCENT PAINT FINISH: EXTERIOR HOLLOW METAL DOORS & FRAMES TO SELECTED BY ARCHITECT; SEMI-GLOSS	(F2) FLOOR SEALER: MAN. BY: PROSOCO; STAND OFF; SLX100; WATER & OIL REPELLENT W/ PROSOCO CONSOLIDOCK LS PREMIUM LITHIUM SILICATE SEALER, HARDENER & DENSIFIER FOR CONCRETE.
(P5) ACCENT PAINT FINISH: INTERIOR HOLLOW METAL DOORS & FRAMES TO RECEIVE: SHERWIN WILLIAMS. COLOR: GAUNTLET GRAY; SW7019; SEMI-GLOSS.	(F3) 10MM RUBBER FLOOR ON BASE MAT-RE: SPEC MAN. BY: MONDO; SPORT IMPACT. COLOR: NOIR BLACK; 008.
(P6) PAINT FINISH: ALL PAINTABLE WALL SURFACES TO RECEIVE EPOXY PAINT: ICI; HIGH HIDING. COLOR TO MATCH SHERWIN WILLIAMS. COLOR: EIDER WHITE; SW7014	INDICATES CHANGE IN FLOORING MATERIAL TYPE.
(P7) PAINT FINISH: ALL PAINTABLE HANDRAILS, GUARDRAILS, STRINGERS, STL. PLATES AT MEZZANINE FLOOR, HOIST BEAM & ROOF ACCESS LADDER TO RECEIVE EPOXY PAINT: COLOR: RED TO BE SELECTED BY OWNER	SPECIAL FINISH SPECIFICATION:
(C1) PAINT FINISH: ALL PAINTABLE CEILING SURFACES TO RECEIVE: BENJAMIN MOORE. COLOR: CHANTILLY LACE; OC-65; SATIN.	(SP1) QUARTZ SURFACE MAN. BY: CAMBRIA. COLOR: SWANBRIDGE
(C2) PAINT FINISH: TOILET & LAUNDRY ROOMS CEILINGS TO RECEIVE: SHERWIN WILLIAMS. COLOR: CHANTILLY LACE; OC-65; SEMI-GLOSS.	(SP2) QUARTZ SURFACE MAN. REP: NICOLE BENJAMIN; 303.227.4935 MAN. BY: CAMBRIA. COLOR: BELLINGHAM
(C3) PAINT FINISH: ALL PAINTABLE CEILING SURFACES, STRUCTURE & ALL MEP TO RECEIVE EPOXY PAINT: BENJAMIN MOORE COLOR: GRAY; 2121-10.	(SP3) PLASTIC LAMINATE CABINETS MAN BY: WILSONART COLOR: SKYLINE WALNUT; 7964K-12
(T1) TILE: 12"x24"; VERTICAL RUNNING BOND PATTERN W/ 33% OFFSET. MAN. BY: DALTILE; IRONCRAFT; 1C12 CASPER GREY; LIGHT POLISHED GROUT: MAN. BY CUSTOM BUILDING PRODUCTS; FUSION PRO. COLOR: ...	(SP4) STAINLESS STEEL COUNTERTOP. RE: SPEC.
(T2) 2"x10"; HORIZONTAL RUNNING BOND PATTERN. MAN. BY: ARIZONA TILE; CASTLE BRICK; BROWN. GROUT: MAN. BY CUSTOM BUILDING PRODUCTS; FUSION PRO. COLOR: ...	(SP5) P-LAM. MAN. BY: FORMICA. COLOR: BRITE WHITE; 459-58.
(SH1) 3-WALL CUSTOM 1" SOLID SURFACE SHOWER SURROUND TO CEILING MAN. BY: DUPONT; COLOR: BY ARCH.	(SP6) HARDSTOP PROTECTIVE PANELS FROM FLOOR TO CEILING AT ALL WALLS. MAN. BY: FORMICA. COLOR: WHITE TWILL; 9285-58; MATTE FINISH.
	(SP7) STAINLESS STEEL COUNTERTOP, SHELVING & UPPER CABINETS. RE: SPEC.
	(SP8) 10MM RUBBER FLOOR MAN. BY MONDO; SPORT IMPACT. COLOR: CUSTOM LOGO. RE: SPEC.
	(SP9) 2" DEEP P-LAM. WRAPPED MDF ACCENT WALL W/ REVEALS. ALL EDGES TO BE WRAPPED IN P-LAM. WILSONART LAMINATE. COLOR: SKYLINE WALNUT; 7964K.
	(SP10) QUARTZ SURFACE MAN. BY: CAMBRIA. COLOR: MARWELL
	(SP11) P-LAM. CABINETS NEVAMAR LAMINATE. COLOR: SIMPLICITY; W07100WE.

FINISH PLAN SPECIFIC NOTES	
1	REFER TO FINISH SCHEDULE & A7.0 FOR FINISHES/SPECIFICATIONS.
2	ALL GYPSUM BOARD CEILINGS, UNO, TO BE PAINTED "C1".
3	ALL INTERIOR HOLLOW METAL DOORS & FRAMES TO BE PAINTED "P5".
4	ALL EXTERIOR HOLLOW METAL DOORS & FRAMES TO BE PAINTED "P4"
5	ALL WOOD DOORS TO BE STAINED TO MATCH "SP3". RE: DOOR SCHEDULE.
6	ALL GYPSUM BOARD CEILINGS IN THE TOILET ROOMS TO BE PAINTED "C2".
6	ALL WOOD WINDOW SILLS TO BE STAINED TO MATCH "SP3".
7	ALL WOOD SHELVING, CORBELS, TRIM, CLEATS, SUPPORTS, AND ALL EXPOSED FACE PANELS TO BE STAINED TO MATCH P-LAM.
8	AT ALL CMU WALLS (EXCEPT COLORED CMU LOCATIONS PER 10) PROVIDE BLOCK FILLER AND EPOXY PAINT "P6".
9	PROVIDE BASE AT ALL P-LAM. CABINETS. BASE TO FILL ENTIRE GAP.
10	PROVIDE COLORED CMU AT FITNESS ROOM WALL AND APPARATUS BAY WALL. RE: SPEC.
11	PROVIDE 12" (W) X 1/2" (H) THRESHOLD AT OVERHEAD DOOR TRANSITION BETWEEN ATHLETIC FLOORING & PATIO. COORD. COLOR W/ ARCHITECT.
12	PROVIDE 16GA STAINLESS STEEL CORNER GUARDS W/3.5" RETURNS ON EACH SIDE TO 40" A.F.F. AT ALL GYP. BD. CORNERS -TYP.

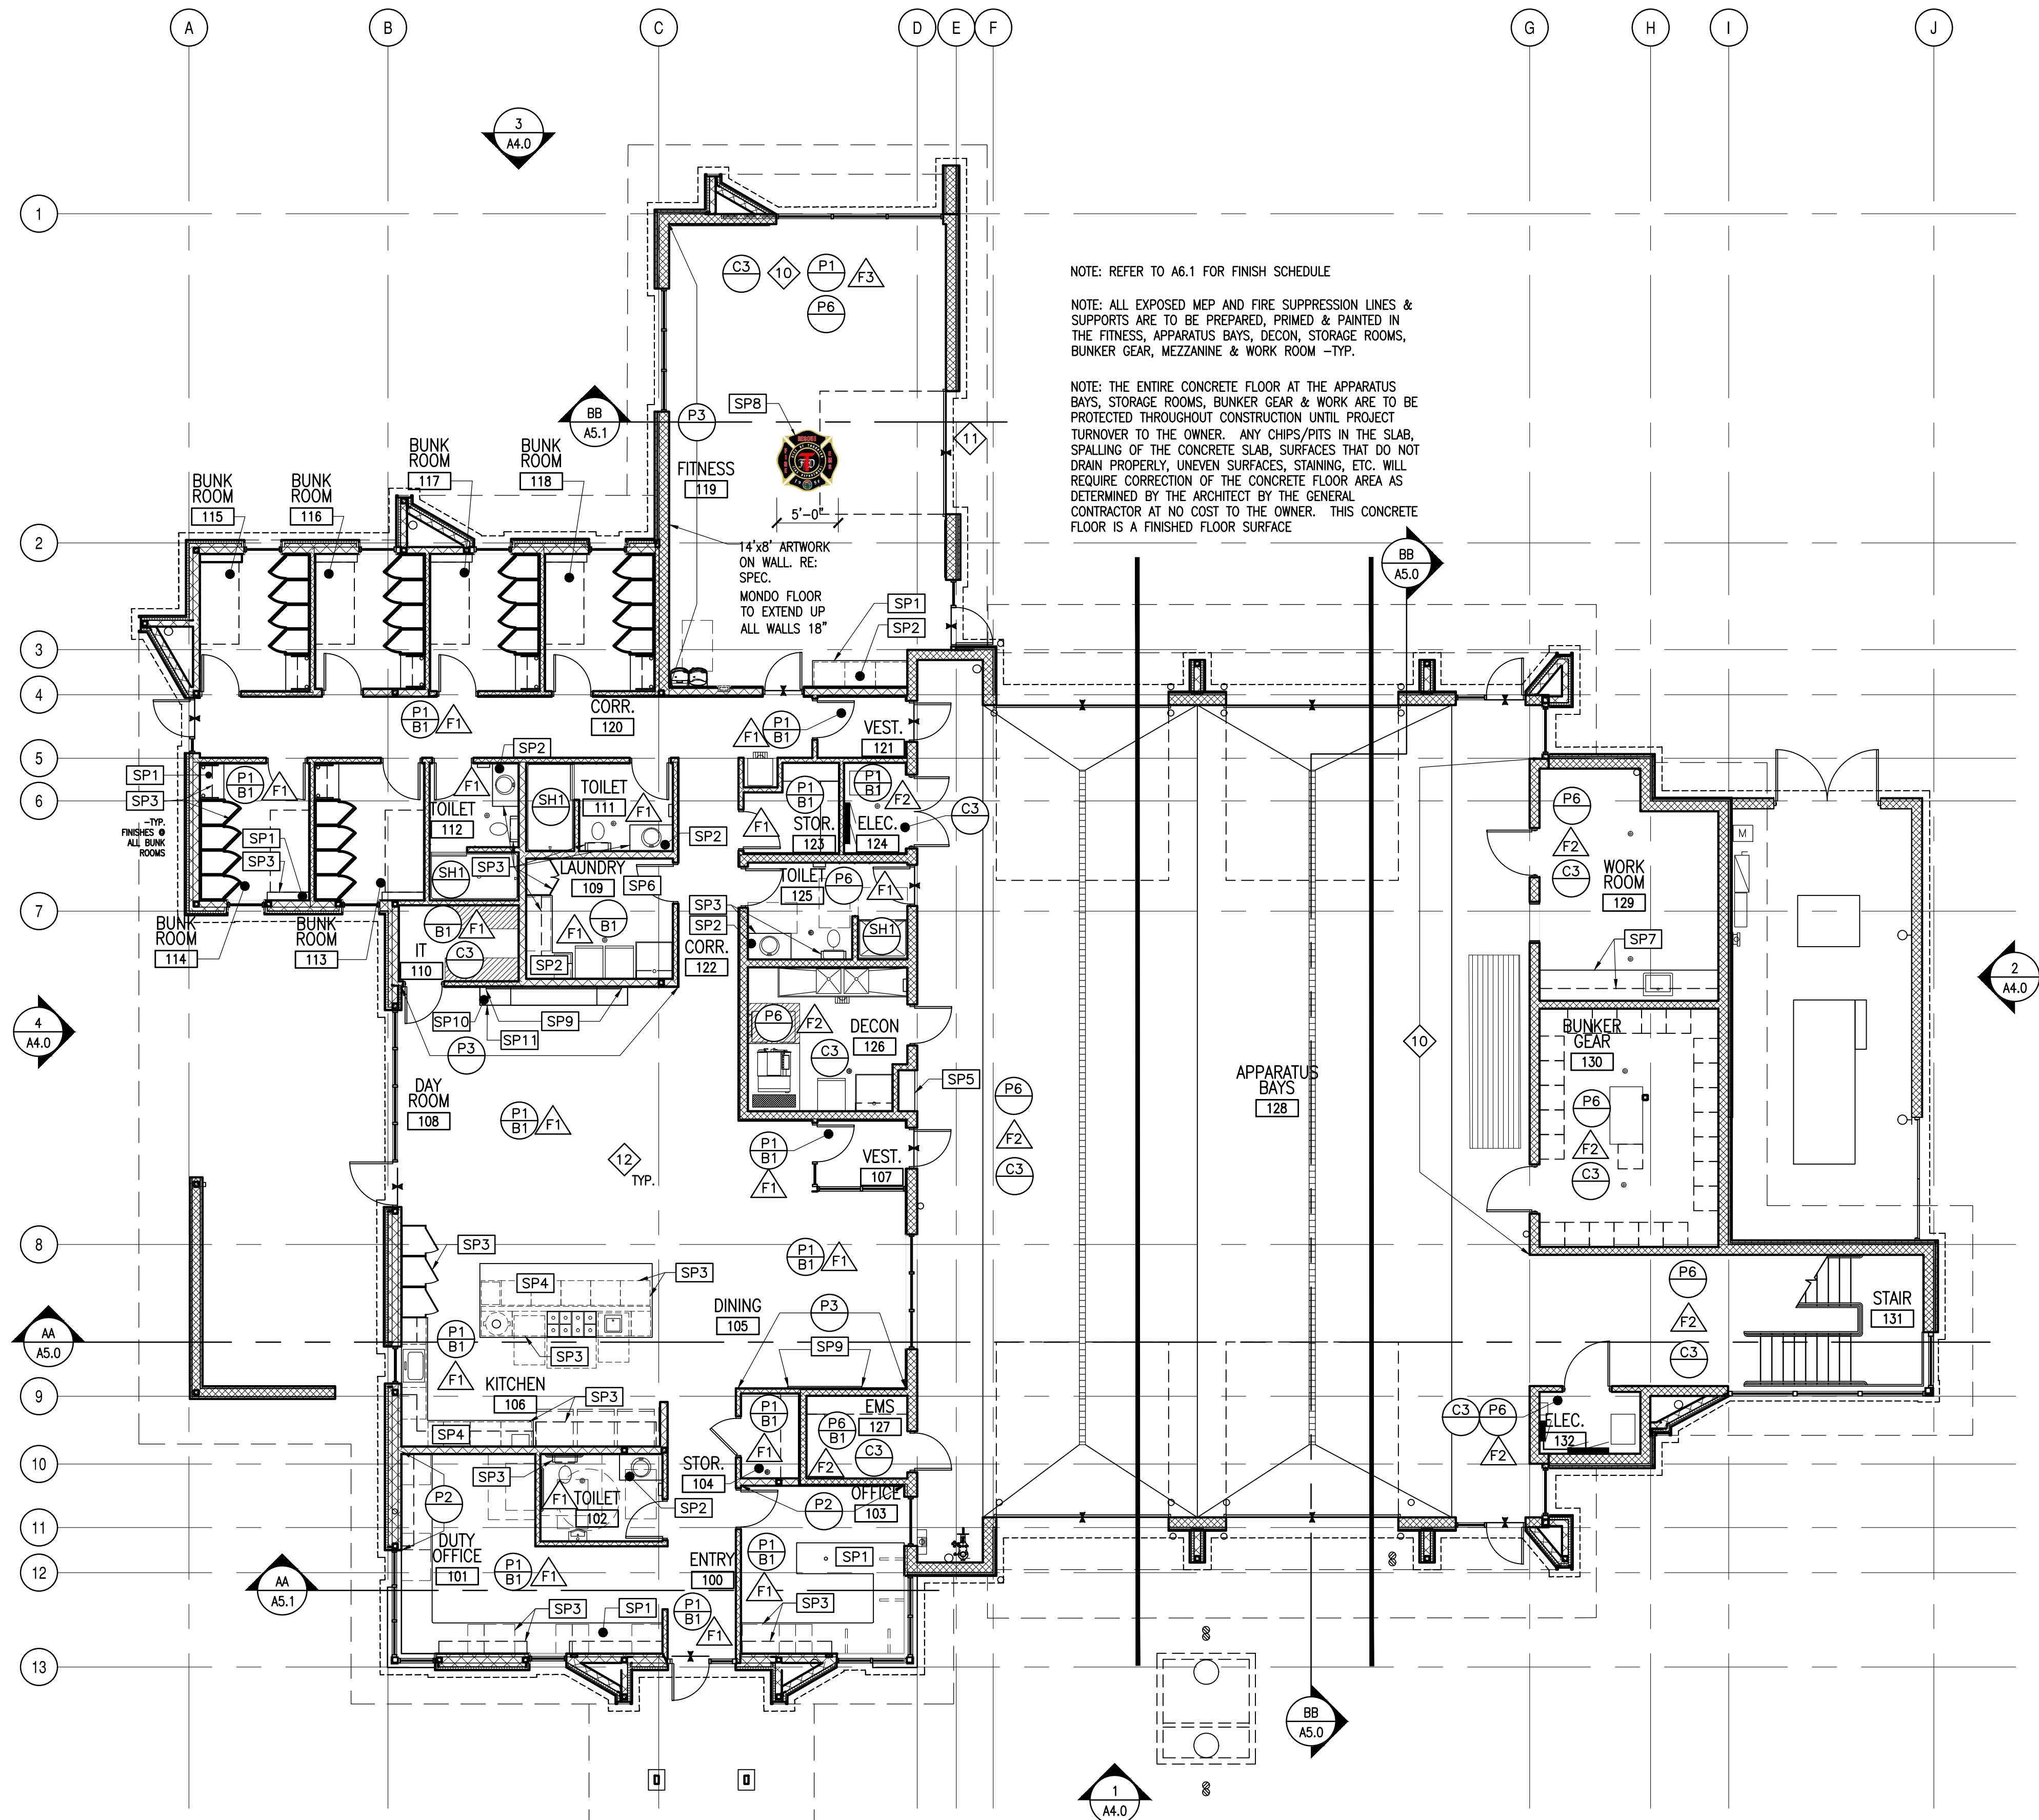

1 MAIN LEVEL FINISH PLAN
SCALE: 1/8"=1'-0"

REVISION NAME		DATE

ISSUE DATE: 2024 0927

GENERAL FINISH NOTES

- THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR ADVISING ALLRED & ASSOCIATES OF ANY QUESTIONS REGARDING THE FINISH SELECTIONS AND FINISH SYSTEMS, METHOD OF APPLICATION OR SCOPE OF WORK PRIOR TO PROCEEDING WITH THE WORK IN QUESTION.
- THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR FIELD INSPECTION OF THE SURFACES TO RECEIVE PAINT, ASSURING THAT SUCH SURFACES ARE ACCEPTABLE FOR APPLICATION PRIOR TO INITIATING ACTUAL FINISH WORK. NO PAINT FINISH SHALL BE APPLIED ON ANY SURFACE WHICH IS UNFINISHED NOR IMPROPERLY PREPARED OR OTHERWISE NOT FULLY ACCEPTABLE FOR THE FINISH APPLICATION. ALL ROUGHNESS OR OTHER IRREGULARITIES THAT MAY APPEAR AFTER PRIMING SHALL BE THOROUGHLY SANDED OUT OR OTHERWISE CORRECTED TO PROVIDE A SMOOTH AND EVEN SURFACE FOR PAINTING AND FINISHING. FINISHED APPLICATION AND WALL APPEARANCE SHALL BE FREE OF SURFACE AND COLOR IRREGULARITIES. BY FINISHING THESE SURFACES THE FINISH CONTRACTOR ACCEPTS THE RESPONSIBILITY FOR THE FINAL PRODUCT.
- APPLICATION FOR ALL PAINTED SURFACES SHALL NOT BE LESS THAN A TWO COAT SYSTEM, UNLESS OTHERWISE NOTED; USING THE COMPLETE PAINT SYSTEM (PRIMER AND FINISH COAT) AS RECOMMENDED BY THE PAINT MANUFACTURER AND THE MODERN GUIDE TO PAINT SPECIFICATIONS, LATEST EDITION, AS MINIMUM STANDARDS.
- THE GENERAL CONTRACTOR SHALL UPON COMPLETION REMOVE PAINT FROM WHERE IT HAS SPILLED, SPLASHED OR SPATTERED ON SURFACES, INCLUDING LIGHT FIXTURES, DIFFUSERS, FITTINGS, ETC. THE GENERAL CONTRACTOR SHALL REMOVE ALL ELECTRICAL SWITCH AND OUTLET COVERPLATES AND SURFACE HARDWARE BEFORE PAINTING; PROTECTING AND REPLACING THE SAME WHEN PAINTING IS COMPLETE.
- SAMPLES OF ALL FINISHES SPECIFIED SHALL BE SUBMITTED TO ALLRED & ASSOCIATES PRIOR TO COMMENCEMENT OF THE WORK.
- ALL WALLS WHICH HAVE BEEN PAINTED WITH A SATIN/SEMI-GLOSS FINISH MUST BE TOUCHED UP AS A PUNCHLIST ITEM SHALL BE REPAINTED ENTIRELY BETWEEN THE TWO CLOSET BREAK POINTS.
- UPON COMPLETION OF WORK, THE GENERAL CONTRACTOR SHALL REMOVE FROM THE PREMISES ALL WASTE MATERIALS AS GENERATED BY THE DELIVERY OF ALL MATERIALS.
- THE GENERAL CONTRACTOR IS RESPONSIBLE TO PROTECT AS REQUIRED ALL OWNER OCCUPIED AREAS WHERE FINISH WORK OR GENERAL CONSTRUCTION IS TO BE PERFORMED.
- THE GENERAL CONTRACTOR SHALL FLASH PATCH AND PREPARE ALL FLOORS AS REQUIRED TO RECEIVE SPECIFIED FLOOR MATERIAL.
- THE CARPET CONTRACTOR SHALL INSPECT THE SUBFLOOR PRIOR TO COMMENCEMENT OF THE WORK; HE SHALL NOTIFY ALLRED & ASSOCIATES IN WRITING OF ANY CONDITIONS WHICH WILL PREVENT HIM FROM PRODUCING SATISFACTORY FINISH WORK.
- FLOORS MUST BE FREE OF DUST, OIL AND ALL FOREIGN MATTER. BUILDING MUST BE PRE-HEATED TO A MINIMUM OF 65 DEGREES FAHRENHEIT, 24 HOURS PRIOR TO INSTALLATION. CRACKS 1/16" OR MORE, HOLES AND OTHER UNEVENNESS MUST BE FILLED WITH A LATEX BASE FLOOR FILLER; HIGH SPOTS MUST BE LEVELED. FLOOR MUST BE SWEEPED CLEAN, WET MOPPED WITH WARM WATER AND SWEEPED AGAIN. IF SWEEPING LEAVES A RESIDUE, FLOORS SHALL BE VACUUMED.
- THE CARPET CONTRACTORS SHALL ASSUME FULL RESPONSIBILITY FOR ANY UNACCEPTABLE FINISH WORK CAUSED BY SUBFLOOR CONDITIONS.
- THE GENERAL CONTRACTOR SHALL THOROUGHLY CLEAN ALL RUBBER BASE AFTER INSTALLATION IS COMPLETED.
- THE CARPET CONTRACTOR IS TO PROVIDE AND INSTALL ALL NECESSARY VINYL REDUCING STRIPS AND/ OR METAL SADDLES AS REQUIRED AT ALL CARPET/MATERIAL TRANSITION POINTS. COLOR SPECIFICATION BY ALLRED & ASSOCIATES.
- CARPETS SHALL BE LAID WITH TIGHT BUTT SEAMS LAID TRUE WITH AN APPROVED BRAND OF WATERPROOF QUICK RELEASE CEMENT IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
- SPOTS AND/OR SMEARS OF CARPET CEMENT SHALL PROMPTLY BE REMOVED WITH APPROVED SOLVENT.
- ALL EXCESS PIECES OF USABLE CARPET SHALL BE STACKED, TAGGED AND LEFT WITH THE OWNER FOR FUTURE USE.
- THE GENERAL CONTRACTOR SHALL THOROUGHLY VACUUM CLEAN ALL CARPETED AREA AFTER INSTALLATION IS COMPLETE, AND SHALL MAINTAIN CONDITION THROUGH TENANT'S MOVE IN.
- ALL CONCRETE FLOORS TO BE MOISTURE TESTED BY THE INSTALLER FOR APPROVAL OF FINAL FINISHED FLOORING MATERIAL PER FLOORING MANUFACTURERS SPECIFICATIONS BEFORE THE FINAL PRODUCT IS INSTALLED.
- REFER TO STRUCTURAL DRAWINGS FOR ALL INTERIOR CMU CONTROL JOINTS.
- PROVIDE SCHLUTER COVE AT PORCELAIN WALL TO FLOOR TRANSITIONS & SCHLUTER OUTSIDE EDGE PROTECTION PROFILE AT ALL EXTERIOR EDGES & CORNERS.
- INSTALL ALL MATERIALS PER MANUFACTURERS RECOMMENDATIONS.
- THE CONCRETE SLAB @ APPARATUS BAYS IS TO BE POURED PER STRUCTURAL DRAWINGS. RE: STRUCT.
- BONDO, SAND & PAINT ALL EXPOSED BEAMS, PLATES & TUBE STEEL.
- COORD. TILE LAYOUT PRIOR TO INSTALLATION TO MINIMIZE THE AMOUNT OF SMALL PIECES.
- PROVIDE SCHLUTER OUTSIDE EDGE PROTECTION BETWEEN WALL TILE & DOOR FRAMES -TYP.
- APPLY MULTIPLE COATS OF BLOCK FILLER AS REQUIRED TO CREATE A SMOOTH SURFACE AT ALL CMU WALLS THAT ARE TO BE PAINTED.

FINISH SCHEDULE

WALL FINISH SPECIFICATION:

- P1** PAINT FINISH: ALL PAINTABLE WALL AND SOFFIT GYP. BD. SURFACES TO RECEIVE: SHERWIN WILLIAMS. COLOR: EIDER WHITE; SW7014; SATIN
- P2** ACCENT PAINT FINISH: WALLS TO RECEIVE: SHERWIN WILLIAMS. COLOR: FUNCTIONAL GRAY; SW7024; SATIN
- P3** ACCENT PAINT FINISH: WALLS TO RECEIVE: SHERWIN WILLIAMS. COLOR: MEDITERANEA; SW7617; SATIN (PROVIDE EPOXY PT. AT CMU WALLS)
- P4** ACCENT PAINT FINISH: EXTERIOR HOLLOW METAL DOORS & FRAMES TO SELECTED BY ARCHITECT; SEMI-GLOSS
- P5** ACCENT PAINT FINISH: INTERIOR HOLLOW METAL DOORS & FRAMES TO RECEIVE: SHERWIN WILLIAMS. COLOR: GAUNTLET GRAY; SW7019; SEMI-GLOSS.
- P6** PAINT FINISH: ALL PAINTABLE WALL SURFACES TO RECEIVE EPOXY PAINT: IC; HIGH HIDING. COLOR TO MATCH SHERWIN WILLIAMS. COLOR: EIDER WHITE; SW7014
- P7** PAINT FINISH: ALL PAINTABLE HANDRAILS, GUARDRAILS, STRINGERS, STL. PLATES AT MEZZANINE FLOOR, HOIST BEAM & ROOF ACCESS LADDER TO RECEIVE EPOXY PAINT: COLOR: RED TO BE SELECTED BY OWNER
- C1** PAINT FINISH: ALL PAINTABLE CEILING SURFACES TO RECEIVE: BENJAMIN MOORE. COLOR: CHANTILLY LACE; OC-65; SATIN.
- C2** PAINT FINISH: TOILET & LAUNDRY ROOMS CEILINGS TO RECEIVE: SHERWIN WILLIAMS. COLOR: CHANTILLY LACE; OC-65; SEMI-GLOSS.
- C3** PAINT FINISH: ALL PAINTABLE CEILING SURFACES, STRUCTURE & ALL MEP TO RECEIVE EPOXY PAINT: BENJAMIN MOORE. COLOR: GRAY; 2121-10.
- T1** TILE: 12"x24"; VERTICAL RUNNING BOND PATTERN W/ 33% OFFSET.
MAN. BY: DALTILE; IRONCRAFT; 1C12 CASPER GREY; LIGHT POLISHED
GROUT: MAN. BY CUSTOM BUILDING PRODUCTS; FUSION PRO. COLOR: _
- T2** 2 1/2"x10"; HORIZONTAL RUNNING BOND PATTERN.
MAN. BY: ARIZONA TILE; CASTLE BRICK; BROWN.
GROUT: MAN. BY CUSTOM BUILDING PRODUCTS; FUSION PRO. COLOR: _
- SH1** 3-WALL CUSTOM 1/2" SOLID SURFACE SHOWER SURROUND TO CEILING
MAN. BY: DUPONT; COLOR: BY ARCH.

WALL BASE SPECIFICATION:


- B1** 4" PINNACLE, TYPE TS RUBBER BASE
MAN. BY: ROPPE.
COLOR: BLACK BROWN; 193
- F1** GRIND CONCRETE FLOOR WITH MULTIPLE GRITS & SEAL. RE: SPEC. PROVIDE MOCKUP FOR APPROVAL
- F2** FLOOR SEALER:
MAN. BY: PROSOCO; STAND OFF: SLX100; WATER & OIL REPELLENT W/ PROSOCO CONSOLIDECK LS PREMIUM LITHIUM SILICATE SEALER, HARDENER & DENSIFIER FOR CONCRETE.
- F3** 10MM RUBBER FLOOR ON BASE MAT-RE: SPEC
METAL DOORS & FRAMES TO RECEIVE: NOIR BLACK; 008.
- INDICATES CHANGE IN FLOORING MATERIAL TYPE.

SPECIAL FINISH SPECIFICATION:

- SP1** QUARTZ SURFACE
MAN. BY: CAMBRIA. COLOR: SWANBRIDGE
- SP2** QUARTZ SURFACE MAN. REP: NICOLE BENJAMIN; 303.227.4935
MAN. BY: CAMBRIA. COLOR: BELLINGHAM
- SP3** PLASTIC LAMINATE CABINETS
MAN BY: WILSONART
COLOR: SKYLINE WALNUT; 7964K-12
- SP4** STAINLESS STEEL COUNTERTOP. RE: SPEC.
- SP5** P-LAM.
MAN. BY: FORMICA.
COLOR: BRITE WHITE; 459-58.
- SP6** HARDSTOP PROTECTIVE PANELS FROM FLOOR TO CEILING AT ALL WALLS.
MAN. BY: FORMICA. COLOR: WHITE TWILL; 9285-58; MATTE FINISH.
- SP7** STAINLESS STEEL COUNTERTOP, SHELVING & UPPER CABINETS. RE: SPEC.
- SP8** 10MM RUBBER FLOOR
MAN. BY MONDO; SPORT IMPACT. COLOR: CUSTOM LOGO. RE: SPEC.
- SP9** 2" DEEP P-LAM. WRAPPED MDF ACCENT WALL W/ REVEALS. ALL EDGES TO BE WRAPPED IN P-LAM. WILSONART LAMINATE. COLOR: SKYLINE WALNUT; 7964K.
- SP10** QUARTZ SURFACE
MAN. BY: CAMBRIA. COLOR: MARWELL
- SP11** P-LAM. CABINETS
NEVAMAR LAMINATE. COLOR: SIMPLICITY; W0710OWE.

FINISH PLAN SPECIFIC NOTES

- 1** REFER TO FINISH SCHEDULE & A7.0 FOR FINISHES/SPECIFICATIONS.
- 2** ALL GYPSUM BOARD CEILINGS, UNO, TO BE PAINTED "C1".
- 3** ALL INTERIOR HOLLOW METAL DOORS & FRAMES TO BE PAINTED "P5".
- 4** ALL EXTERIOR HOLLOW METAL DOORS & FRAMES TO BE PAINTED "P4"
- 5** ALL WOOD DOORS TO BE STAINED TO MATCH "SP3". RE: DOOR SCHEDULE.
- 6** ALL GYPSUM BOARD CEILINGS IN THE TOILET ROOMS TO BE PAINTED "C2".
- 6** ALL WOOD WINDOW SILLS TO BE STAINED TO MATCH "SP3".
- 7** ALL WOOD SHELVING, CORBELS, TRIM, CLEATS, SUPPORTS, AND ALL EXPOSED FACE PANELS TO BE STAINED TO MATCH P-LAM.
- 8** AT ALL CMU WALLS (EXCEPT COLORED CMU LOCATIONS PER 10) PROVIDE BLOCK FILLER AND EPOXY PAINT "P6".
- 9** PROVIDE BASE AT ALL P-LAM. CABINETS. BASE TO FILL ENTIRE GAP.
- 10** PROVIDE COLORED CMU AT FITNESS ROOM WALL AND APPARATUS BAY WALL. RE: SPEC.
- 11** PROVIDE 12" (W) X 1/2" (H) THRESHOLD AT OVERHEAD DOOR TRANSITION BETWEEN ATHLETIC FLOORING & PATIO. COORD. COLOR W/ ARCHITECT.
- 12** PROVIDE 16GA STAINLESS STEEL CORNER GUARDS W/3.5" RETURNS ON EACH SIDE TO 40" A.F.F. AT ALL GYP. BD. CORNERS -TYP.

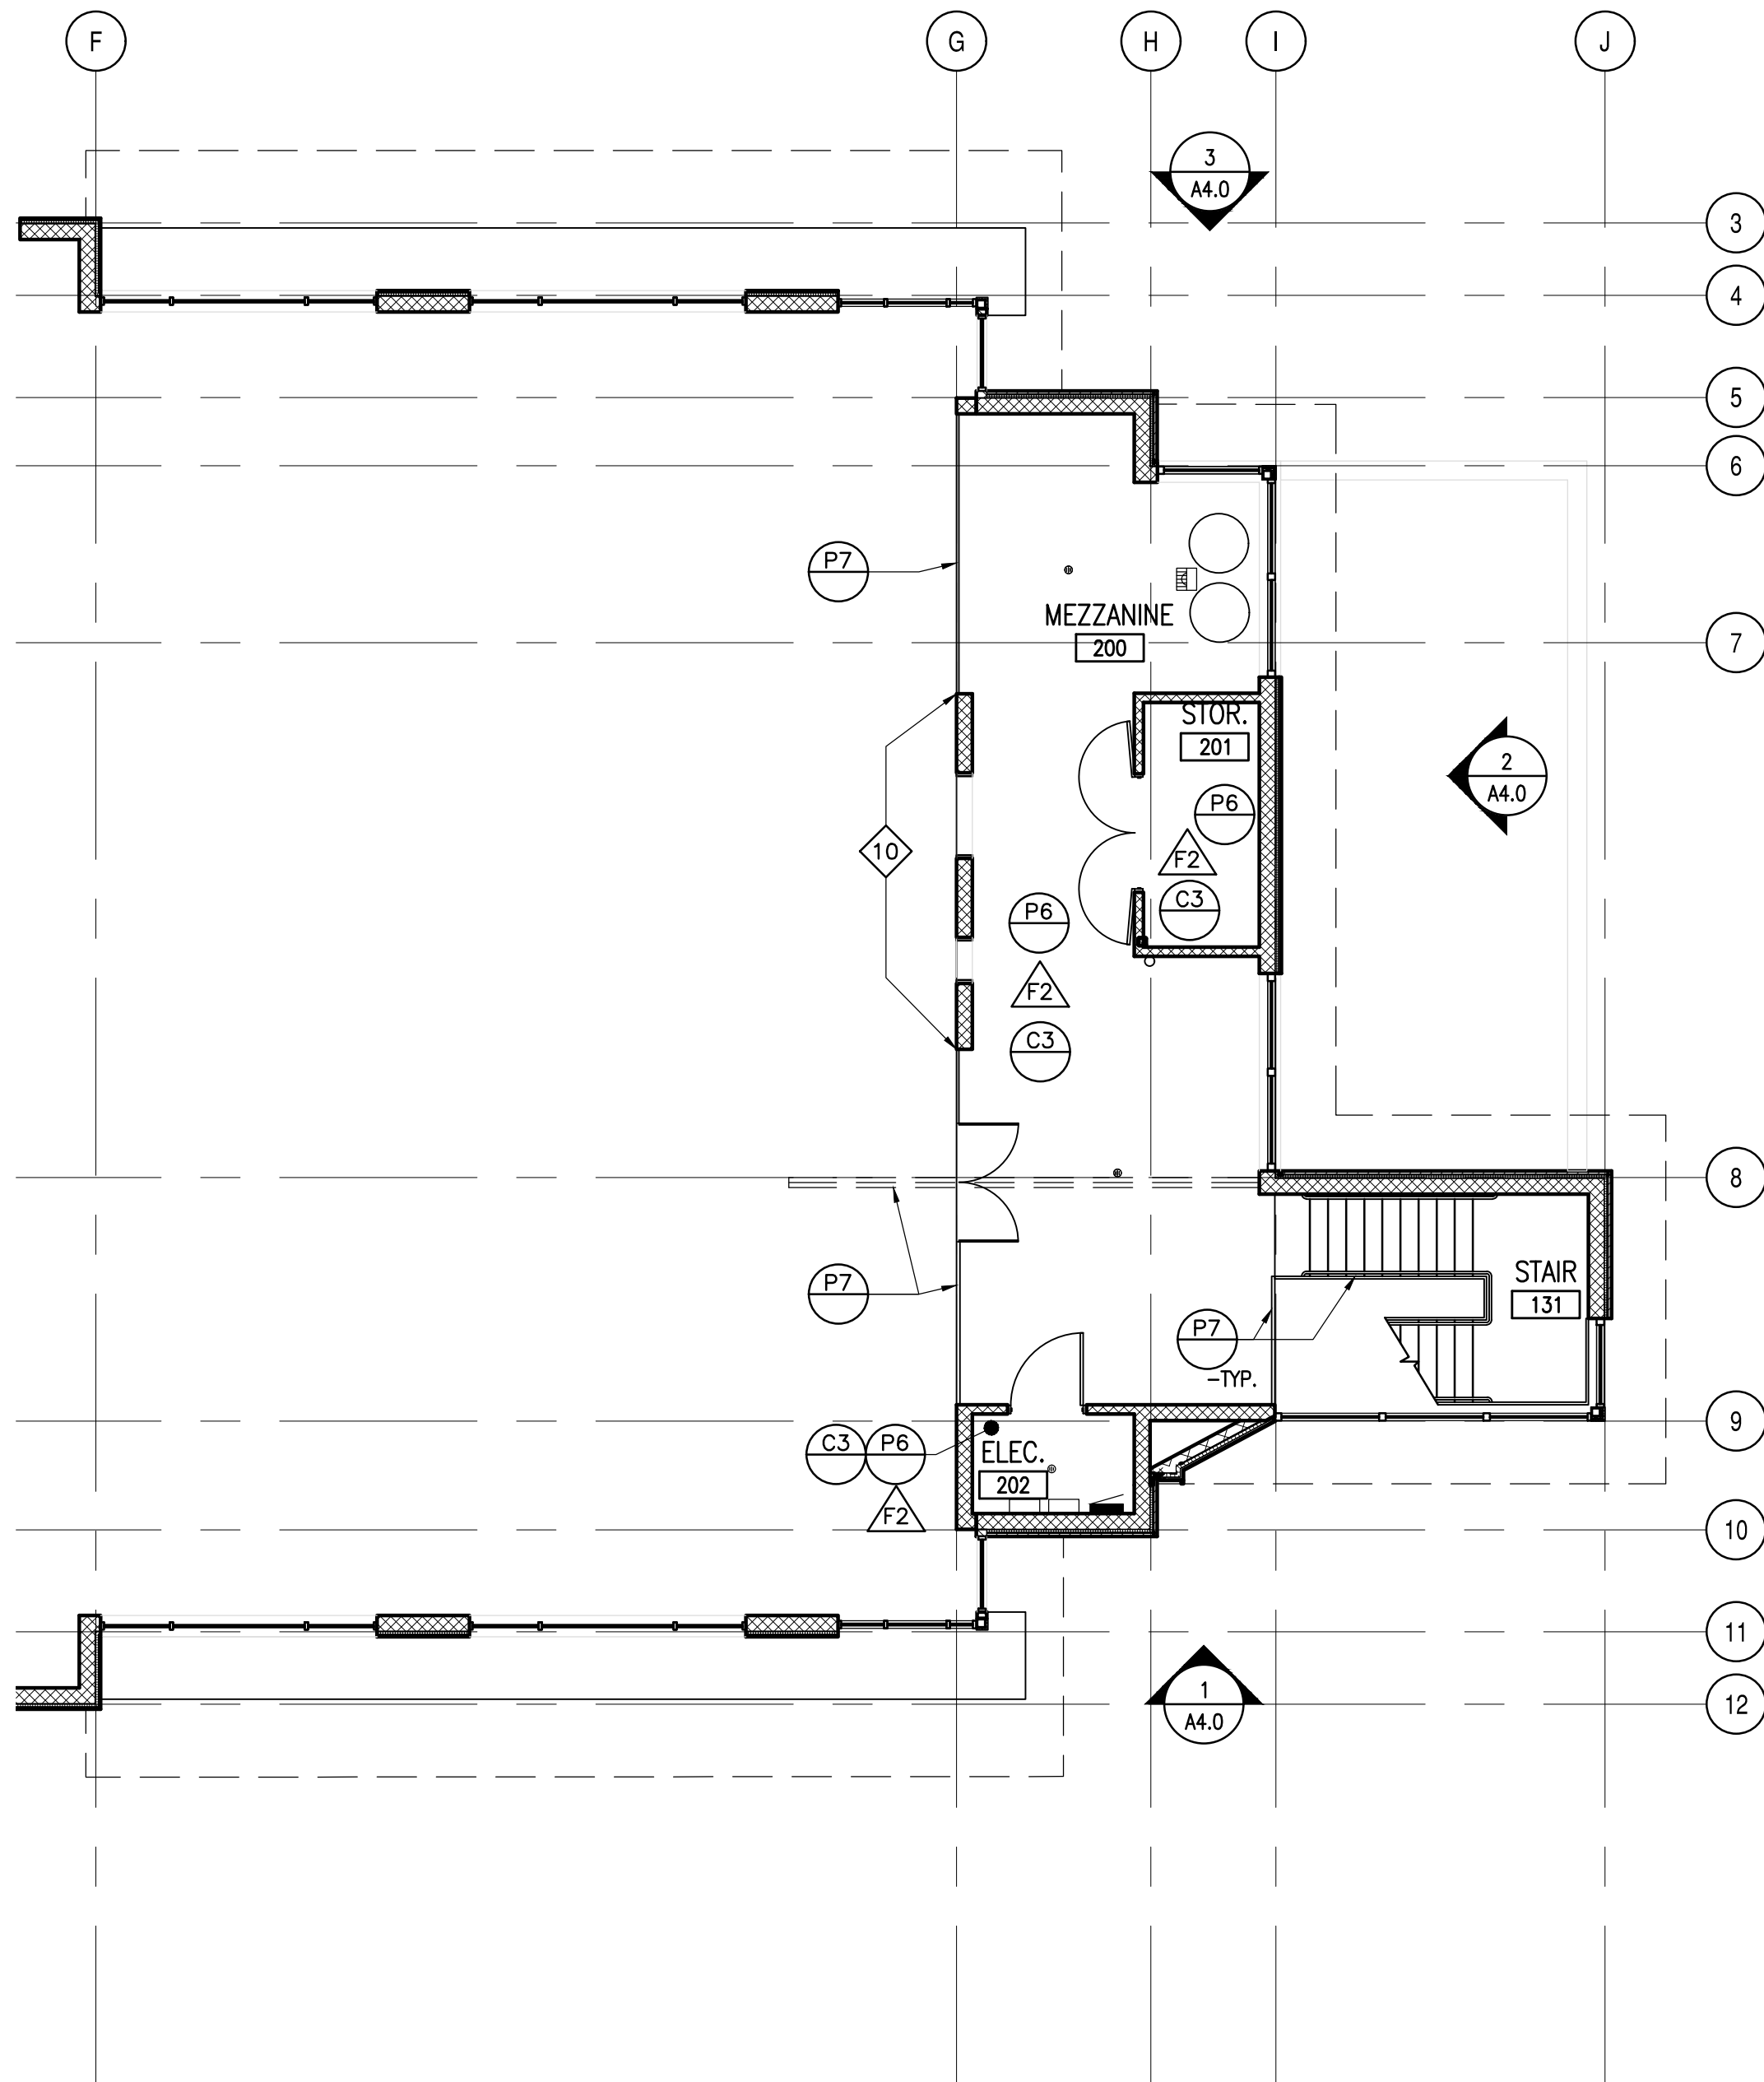

1 MEZZANINE FINISH PLAN
SCALE: 1/8"=1'-0"

CITY OF THORNTON
FIRE STATION #8
15343 MONACO STREET
THORNTON, COLORADO 80602

ALLRED & ASSOCIATES

ARCHITECTURE | PLANNING | INTERIOR DESIGN
589 BURLAND STREET, SUITE 125, BROOMFIELD, COLORADO 80020
PHONE: 303.465.4306
WWW.ALLREDARCH.COM

• JOB NO. 2309












BID SET


MEZZ. FINISH
PLAN & SCHED.

REVISION NAME	DATE

ISSUE DATE: 2024 0927


A6.1

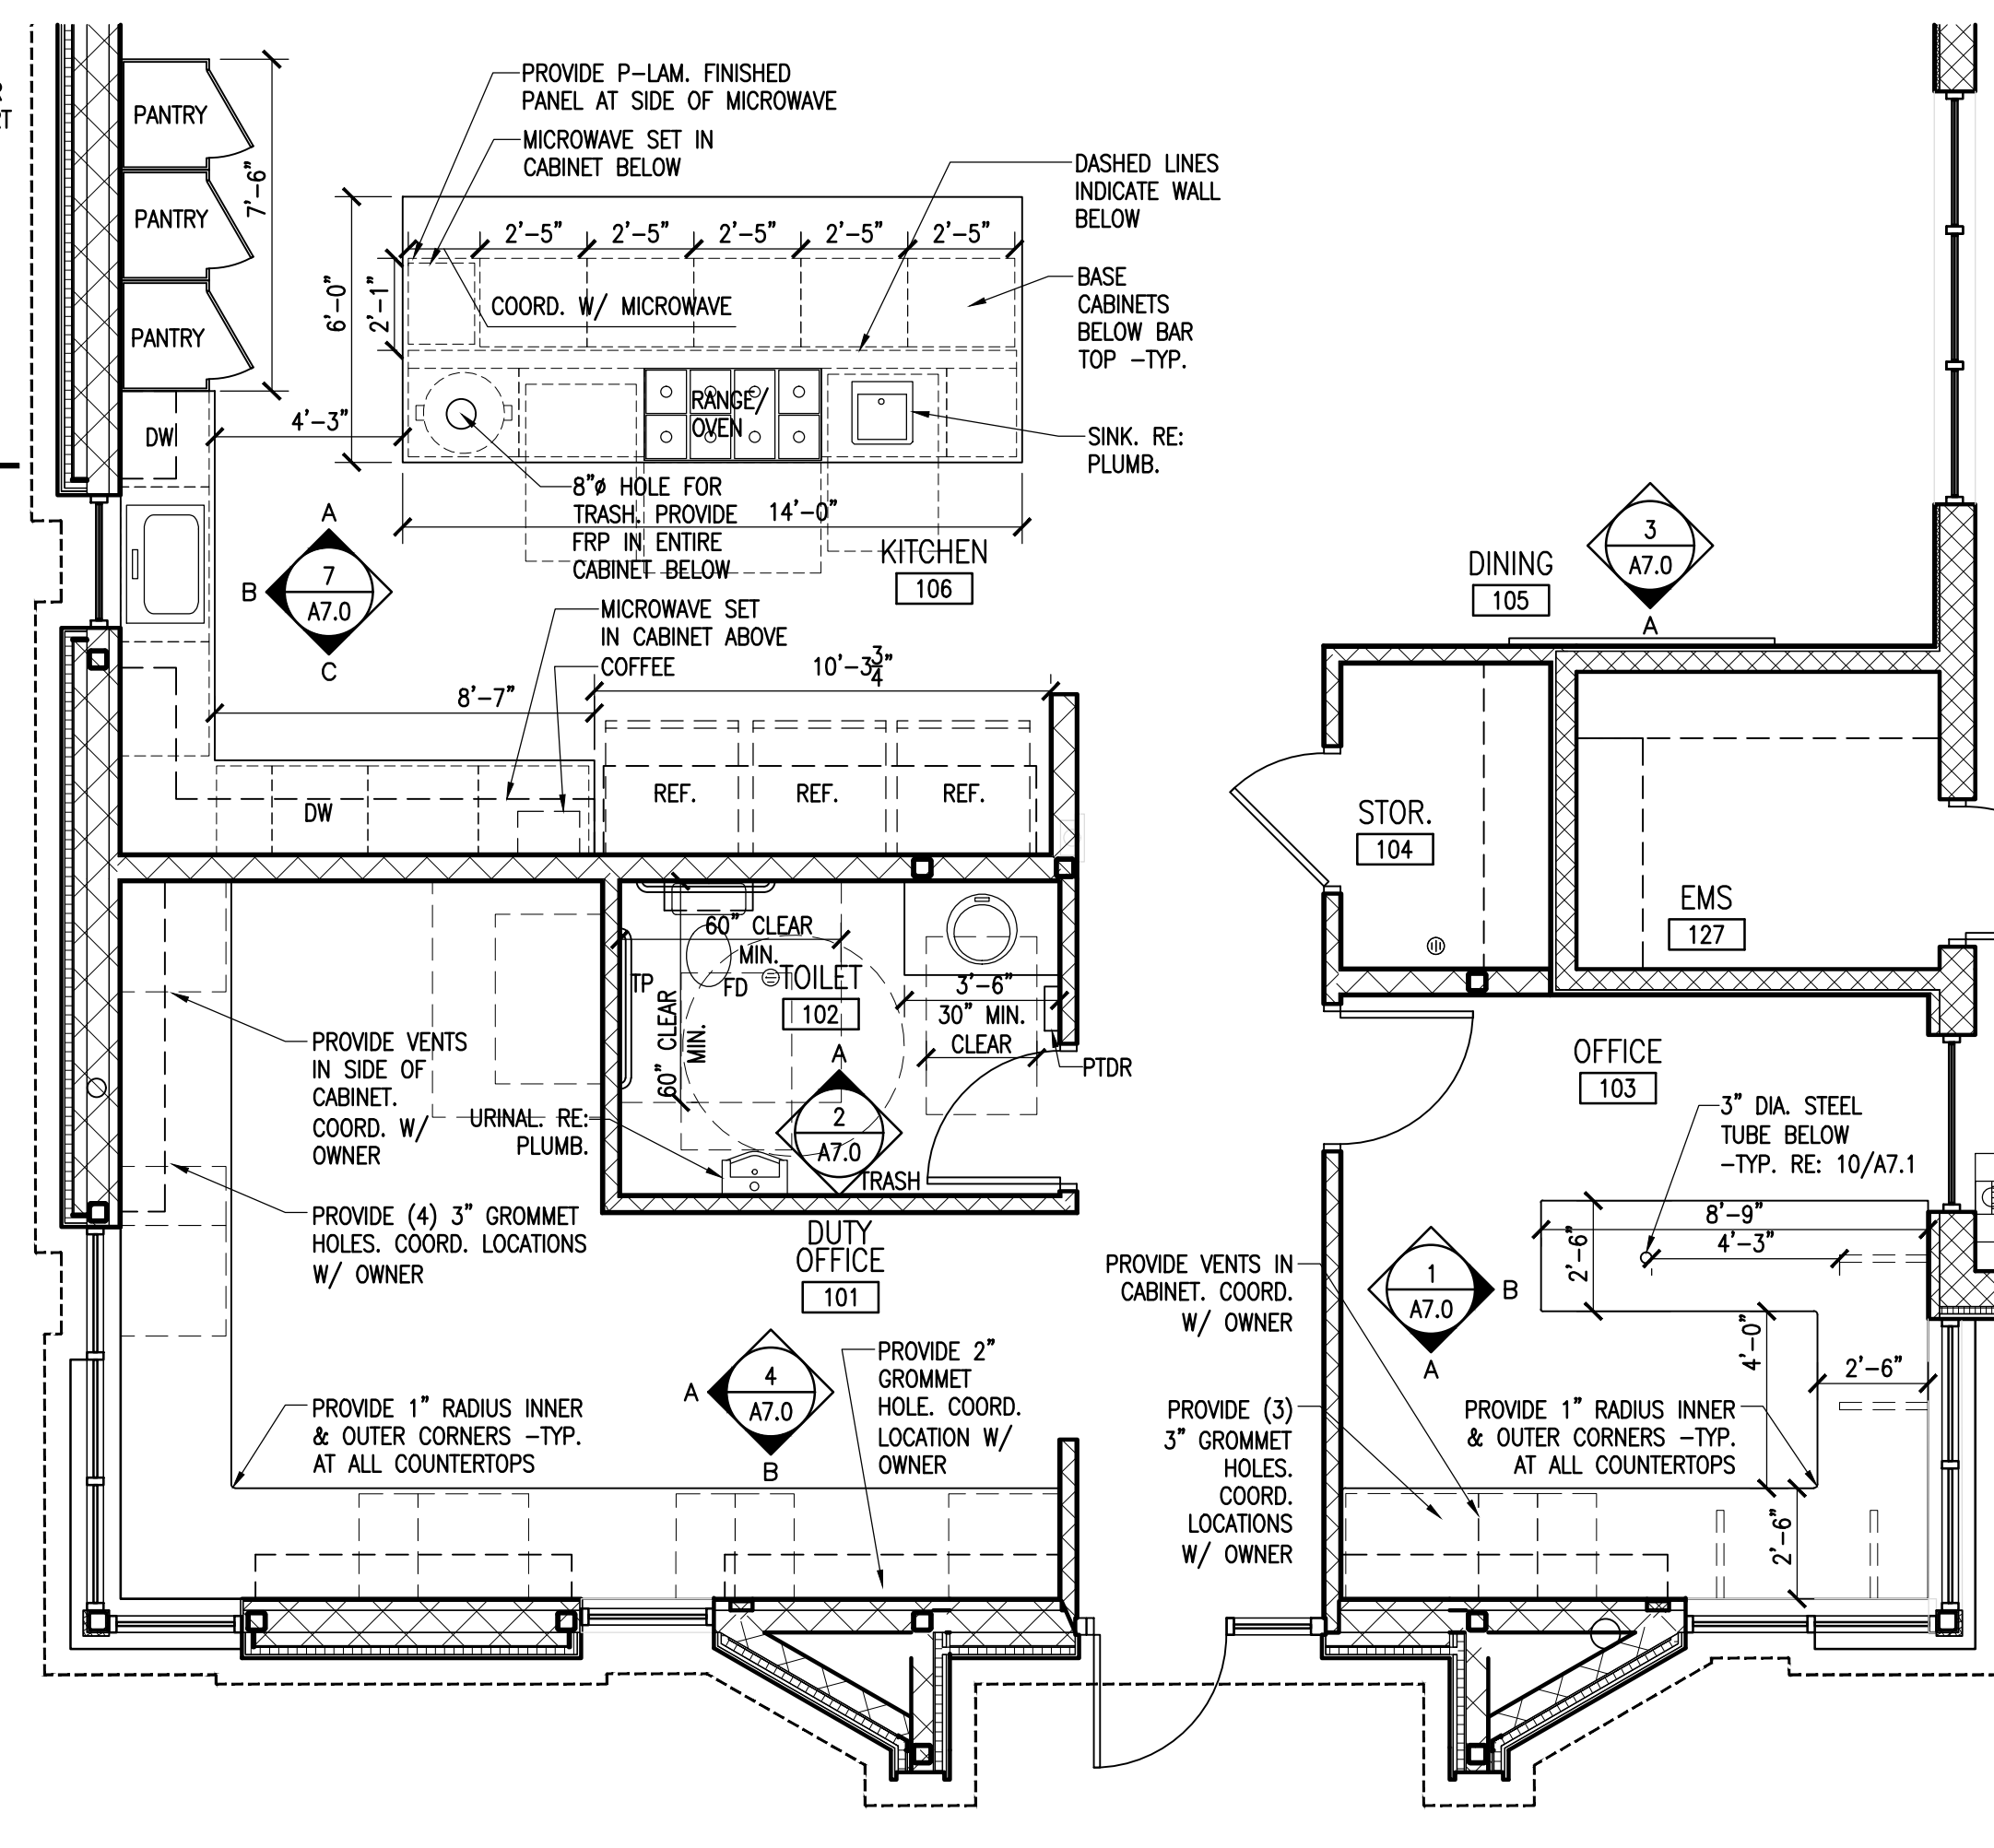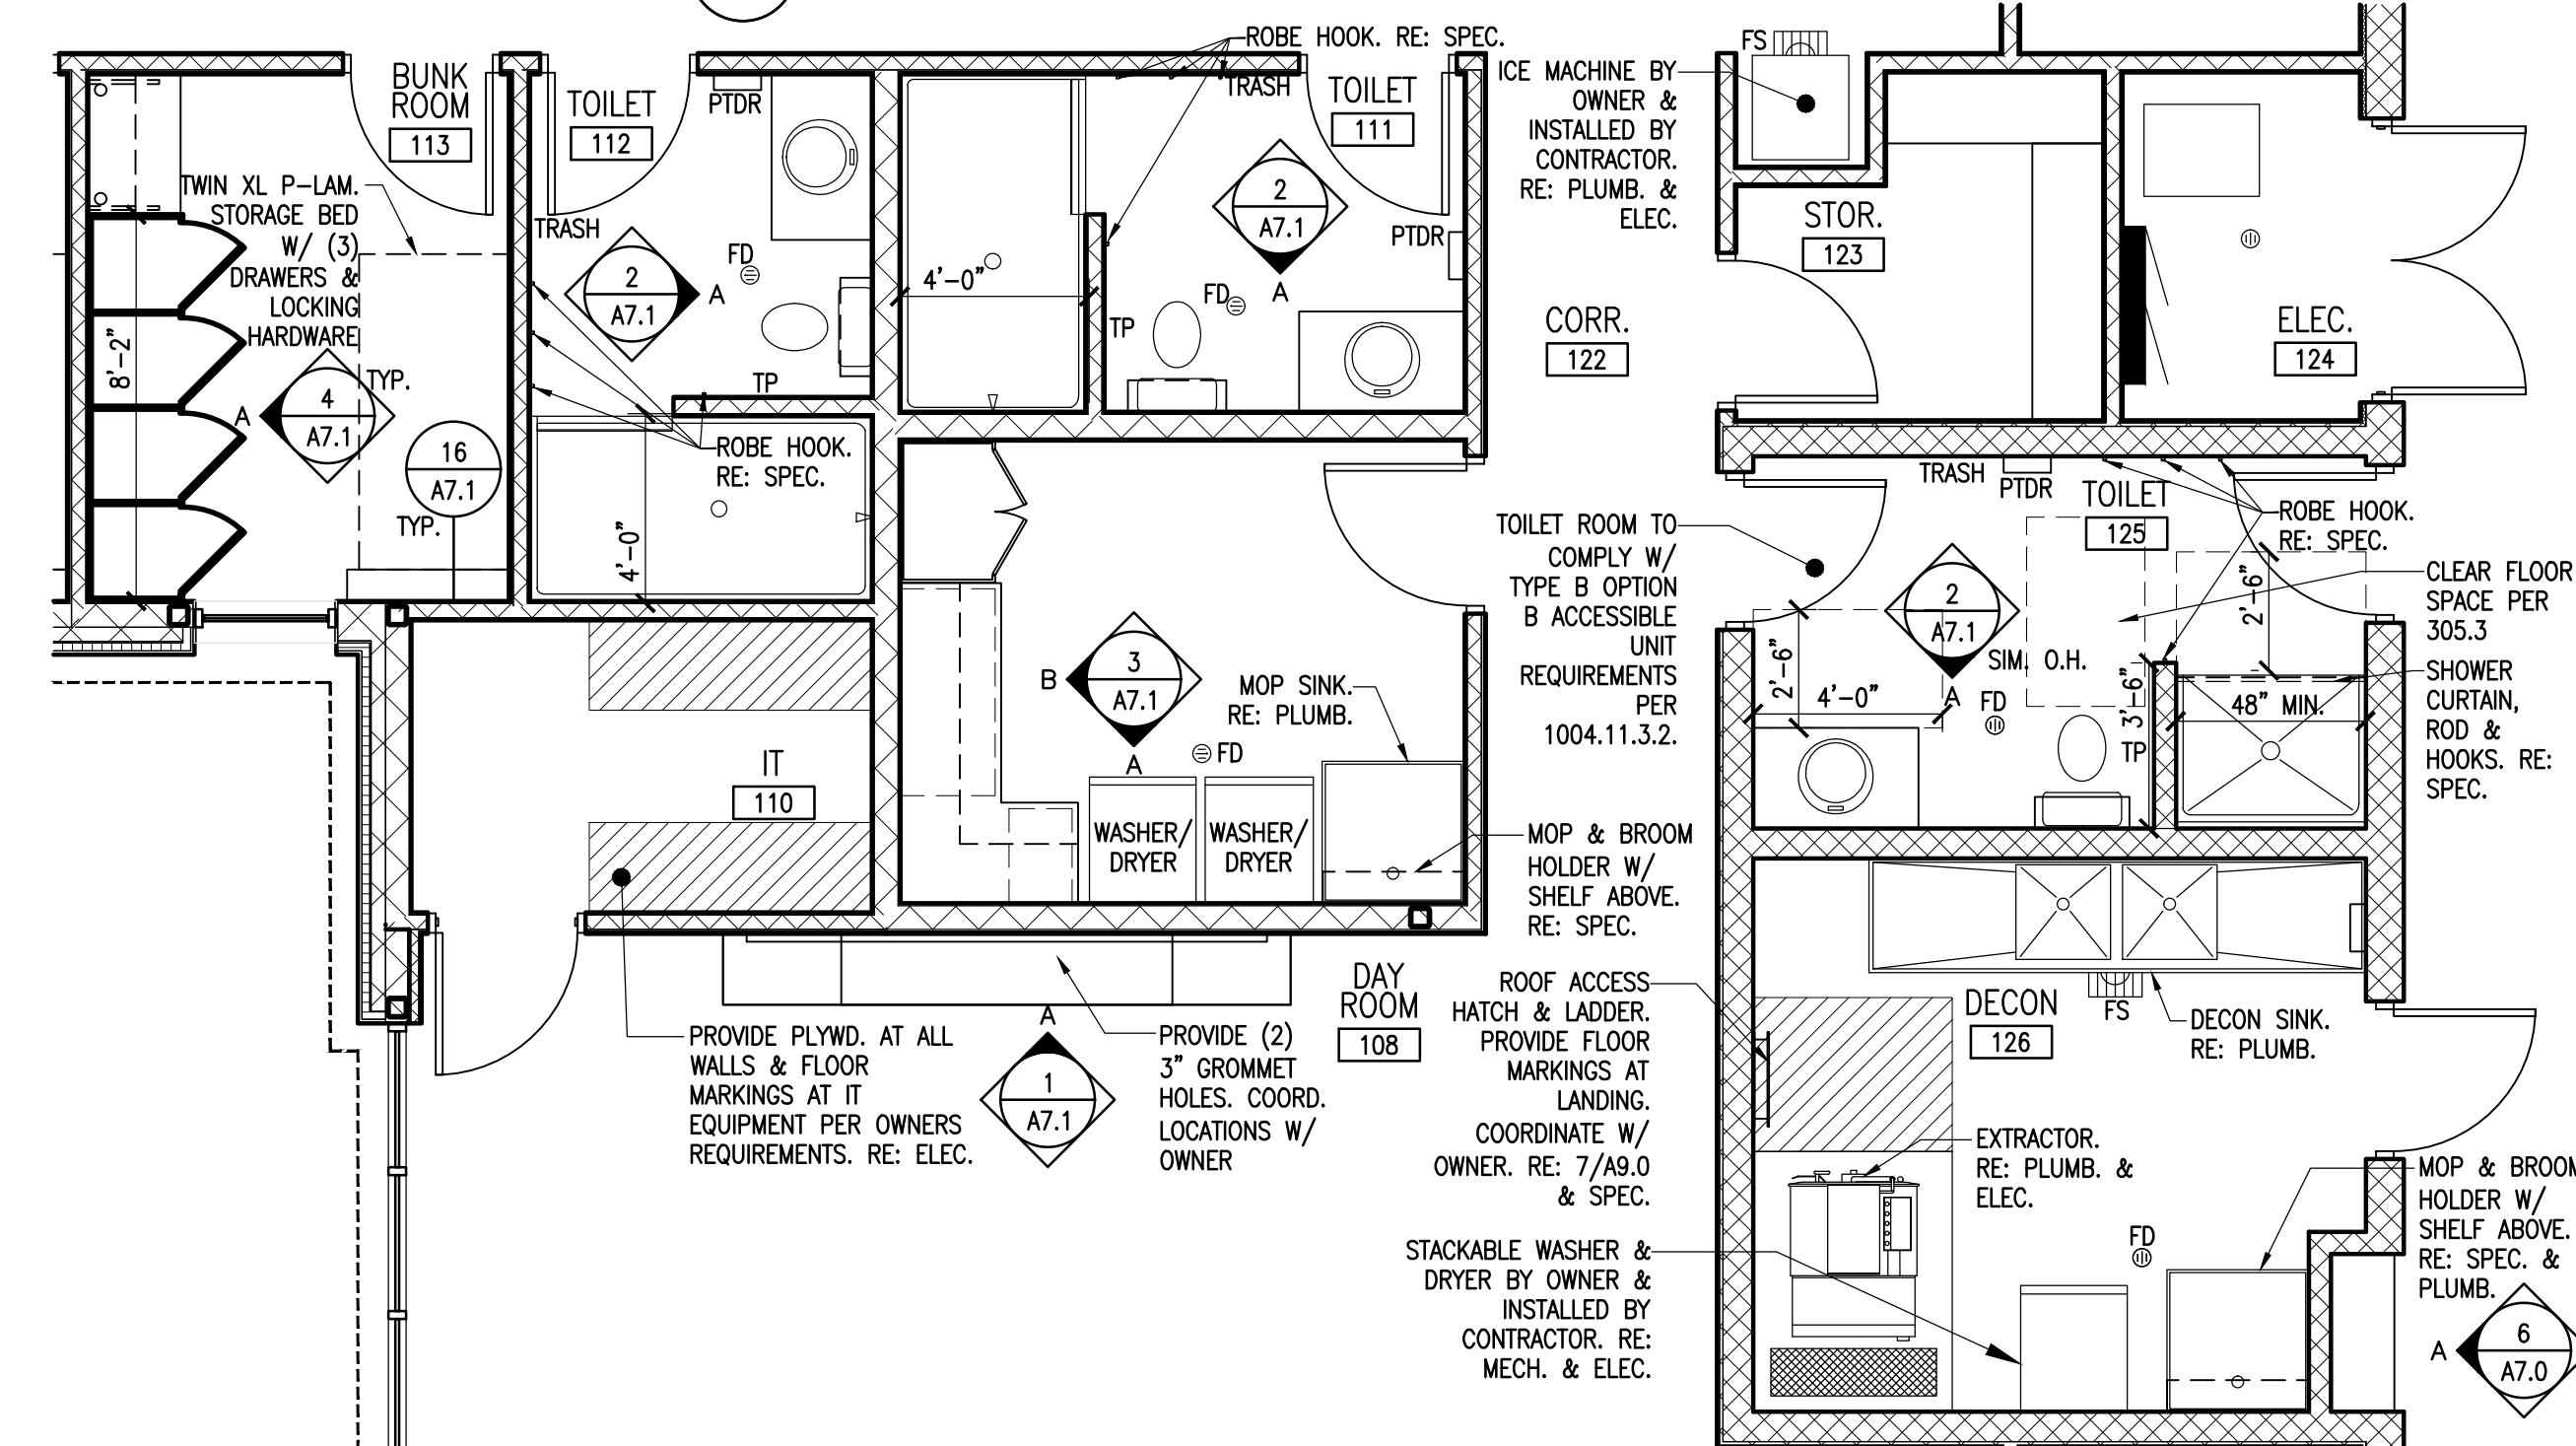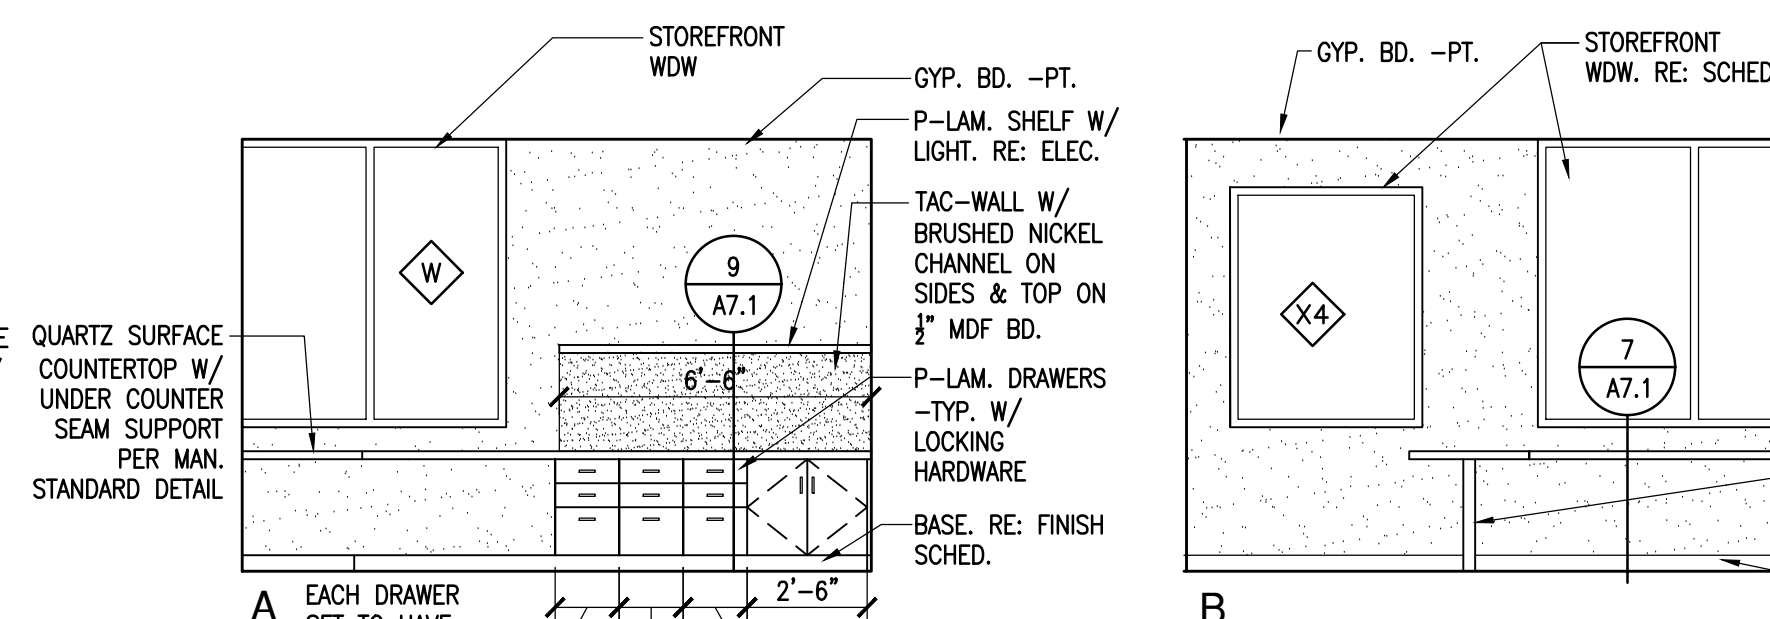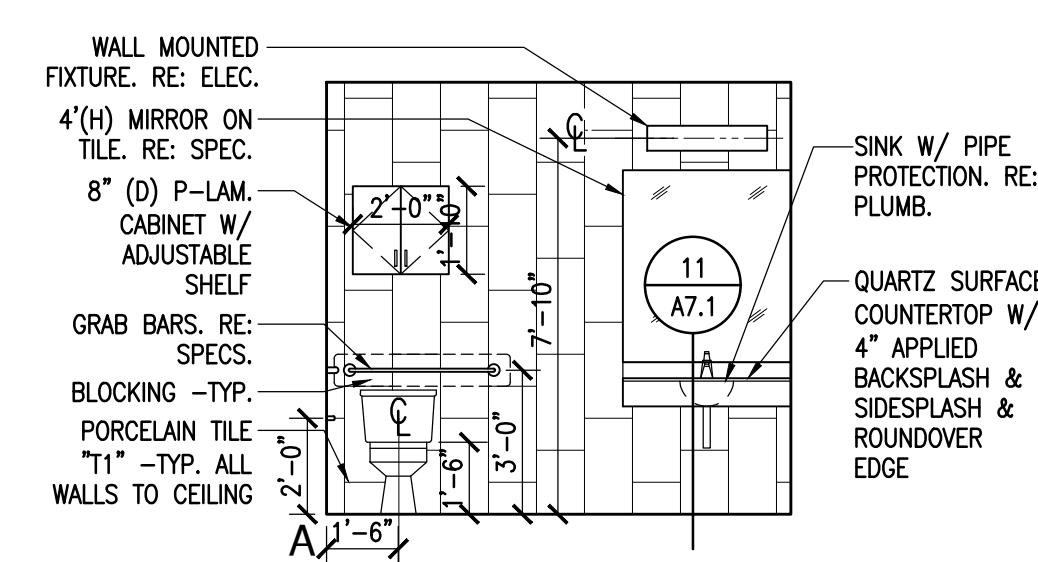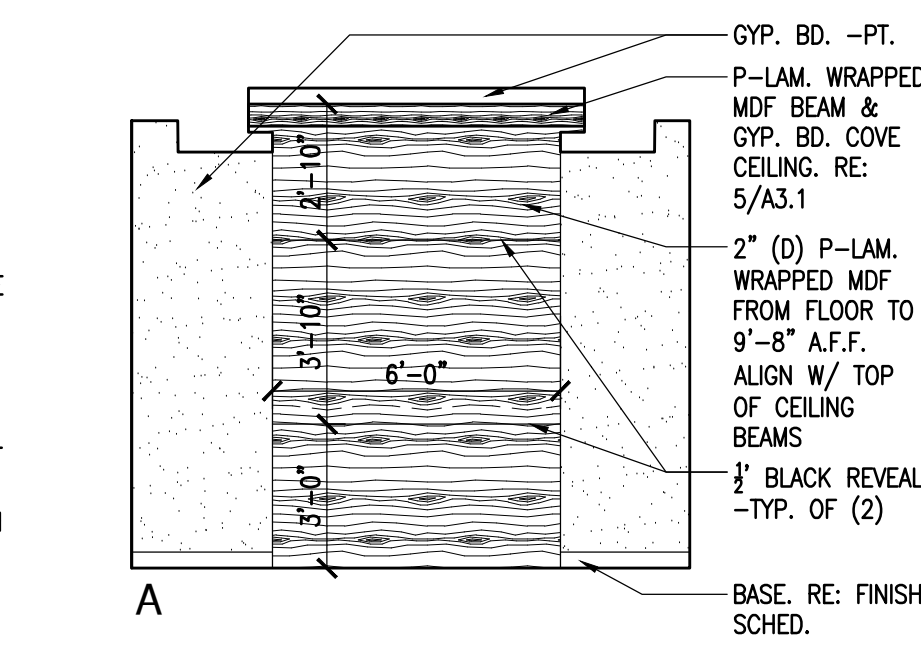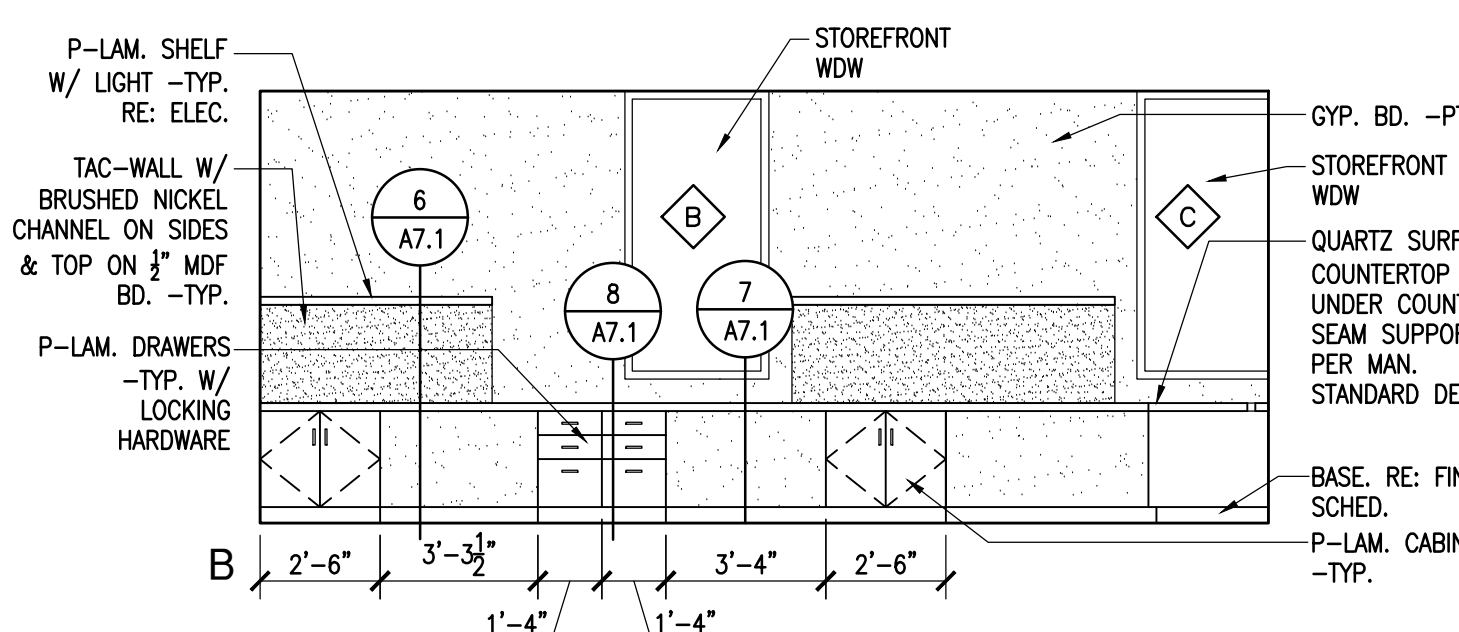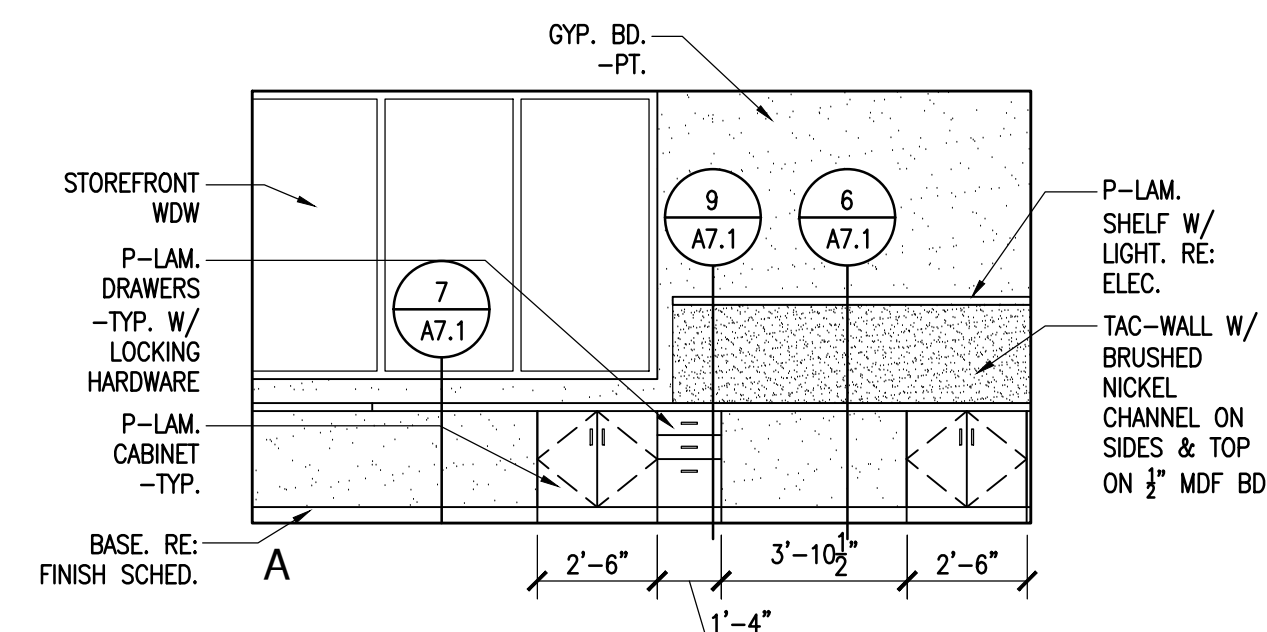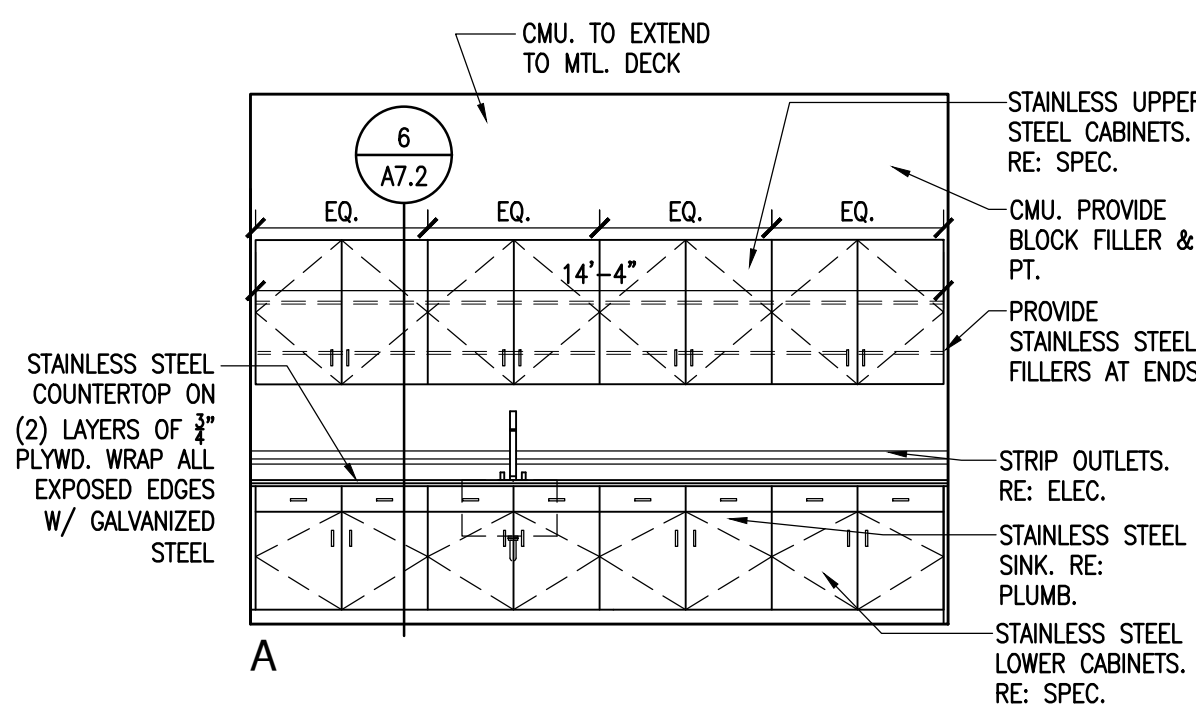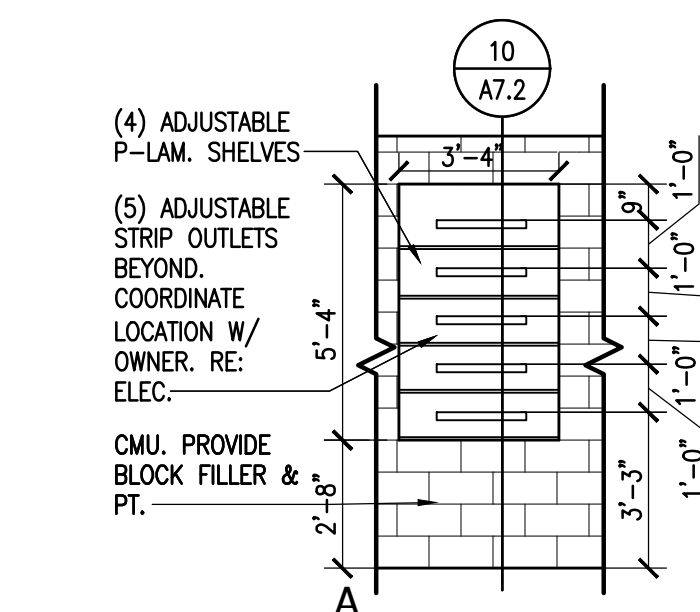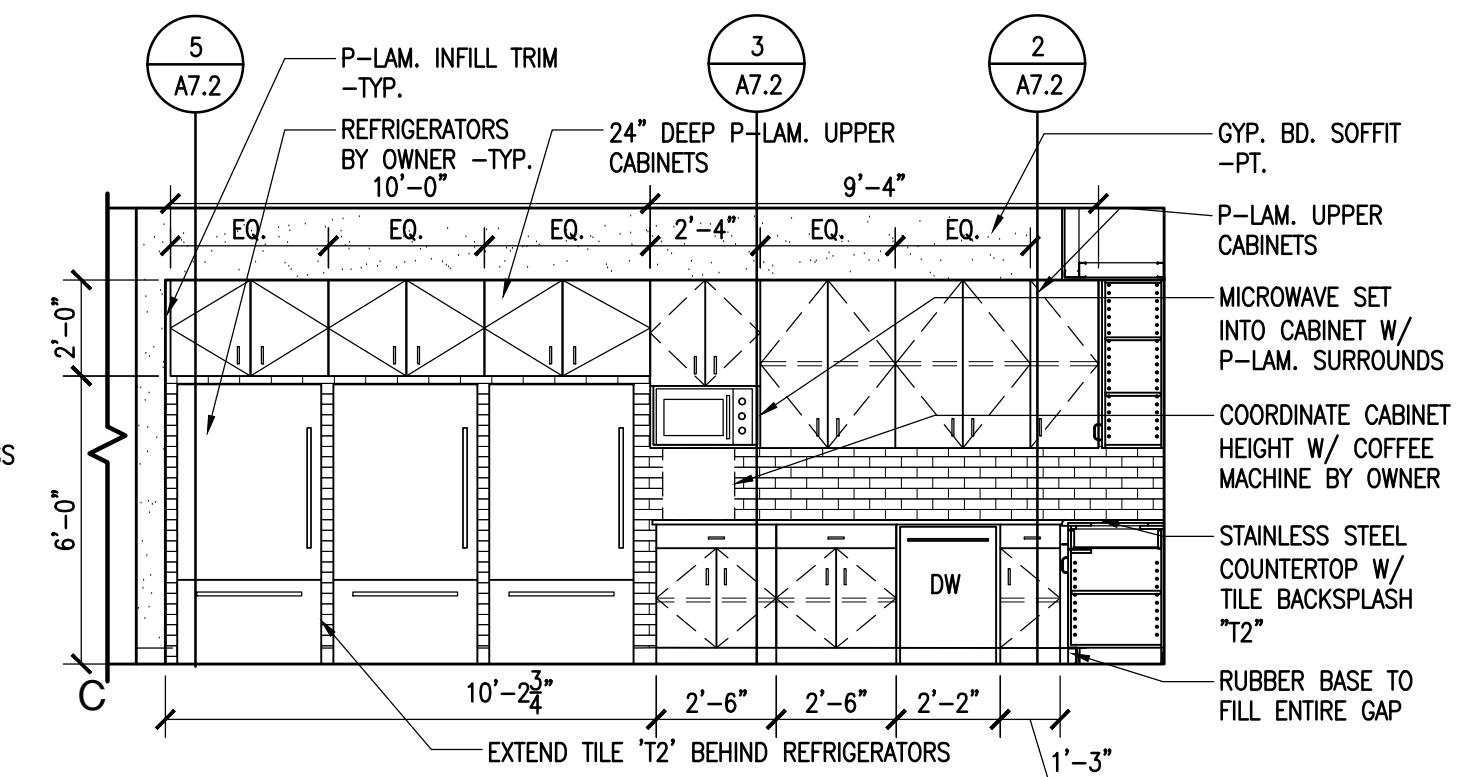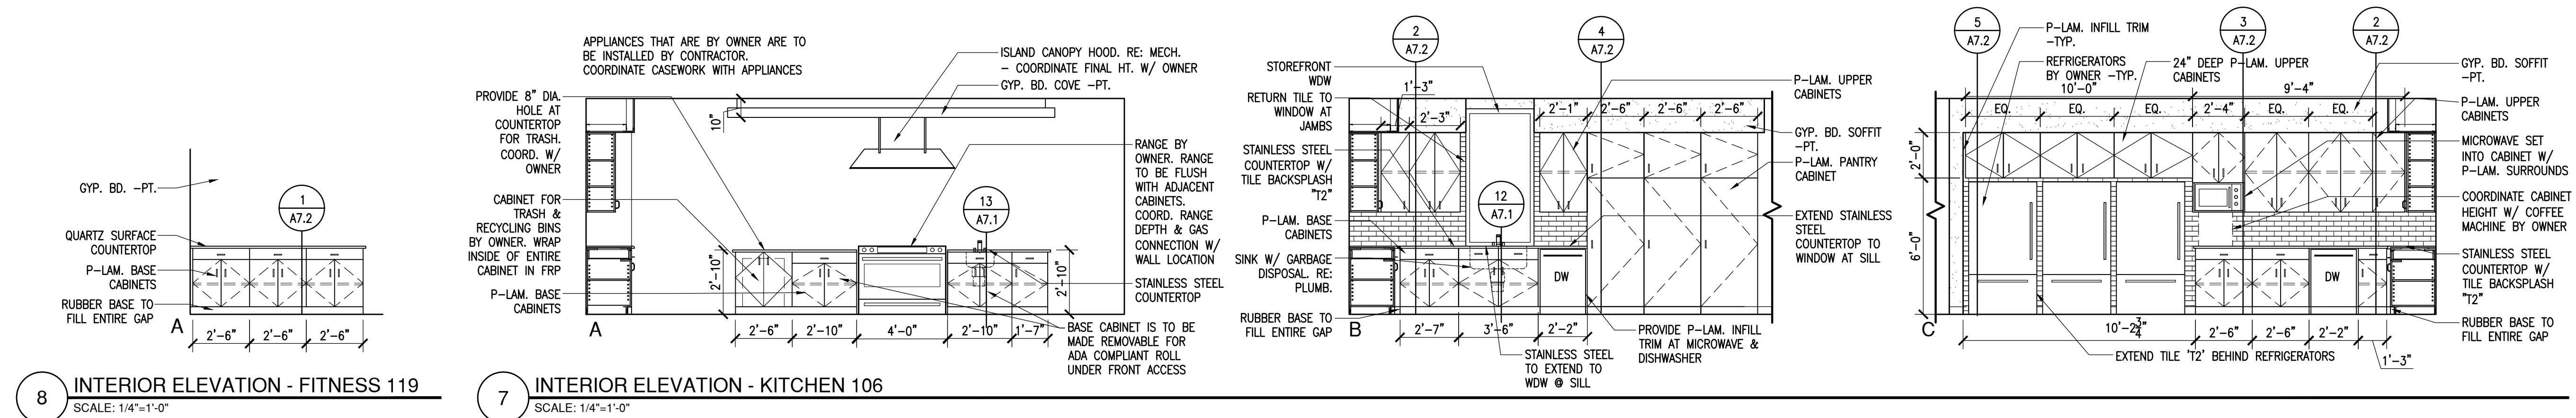

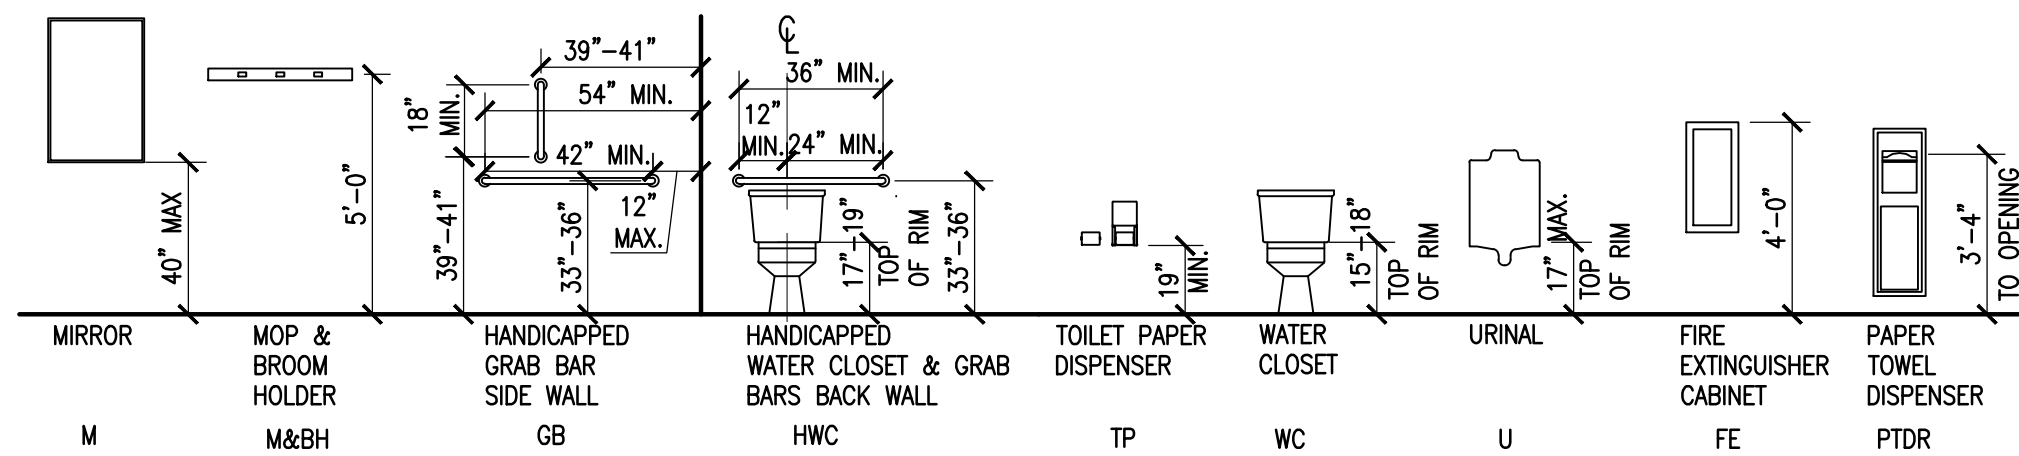


- ALL CABINETS WITH EXPOSED SIDES SHALL HAVE FINISHED END PANELS
- ALL CABINET DRAWERS AND DOORS SHALL HAVE WIRE PULLS
- ALL CABINET DOORS SHALL HAVE OFFSET CONCEALED EUROPEAN HINGES
- ALL BASE CABINETS SHALL HAVE ONE ADJUSTABLE SHELF PER CABINET -TYP. AND ALL UPPER WALL CABINETS SHALL HAVE TWO ADJUSTABLE SHELVES PER CABINET -TYP. U.O.N.
- PROVIDE P-LAM. INFILL TRIM AT ALL OVENS, DISHWASHERS & MICROWAVES THAT ARE SET INTO CASEWORK
- FOR SINK INFORMATION SEE PLUMBING DRAWINGS
- FOR LIGHT FIXTURE INFORMATION SEE ELECTRICAL DRAWINGS
- COORDINATE GROMMET LOCATIONS IN COUNTERS & DESKS WITH OWNER
- PROVIDE BLOCKING AT WALL ACCESSORIES.
- OVERHANG ALL COUNTERTOPS 1-1/2" FROM CASEWORK
- PROVIDE SCHLUTER COVE AT PORCELAIN WALL TO FLOOR TRANSITIONS & SCHLUTER OUTSIDE EDGE PROTECTION PROFILE AT ALL EXTERIOR CORNERS AT ALL TOILET ROOMS. PROVIDE SCHLUTER EDGE PROTECTION AT TILE EDGES.
- MOUNT ALL ACCESSIBLE PLUMBING FIXTURES, COUNTERTOPS & TOILET ROOM ACCESSORIES TO COMPLY WITH ANSI A117.1 STANDARDS WHERE REQUIRED.
- PROVIDE FILLER PANEL AT ALL INSIDE CORNERS OF CASEWORK TO CASEWORK AND CASEWORK TO WALLS TO CLEAR ADJACENT WALLS, CABINETS, & DRAWERS.
- ALL TV/MONITORS ARE BY OWNER AND INSTALLED BY CONTRACTOR
- COORDINATE TOILET PAPER DISPENSER LOCATION W/ OWNER.



16 HEADBOARD/SHELF
DETAIL - BUNK ROOMS
SCALE: 1"=1'-0"

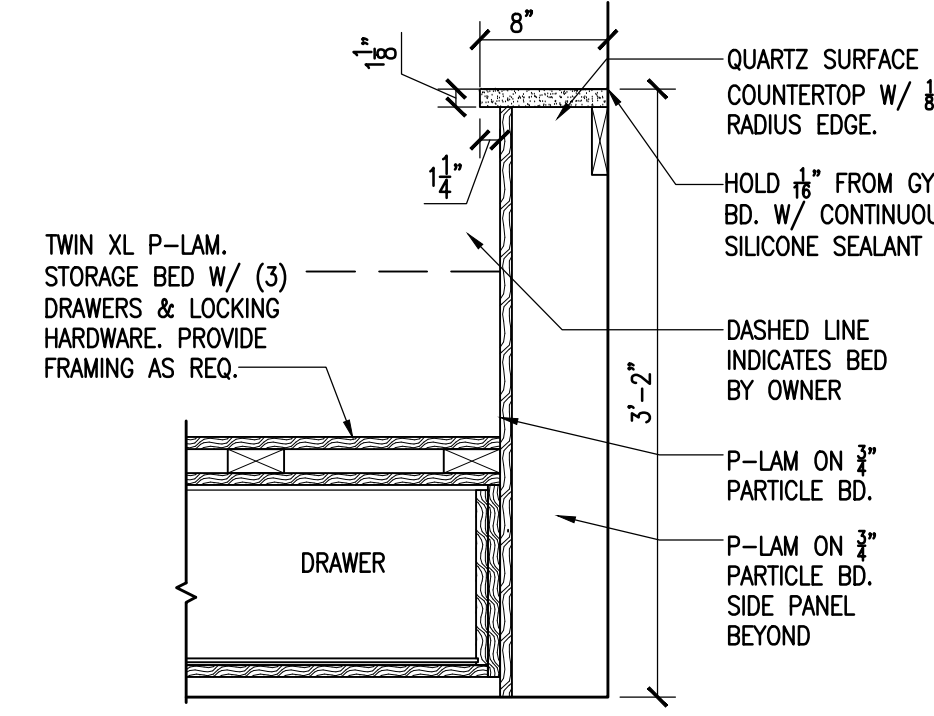


15 DESK DETAIL @ BUNK ROOMS
SCALE: 1"=1'-0"

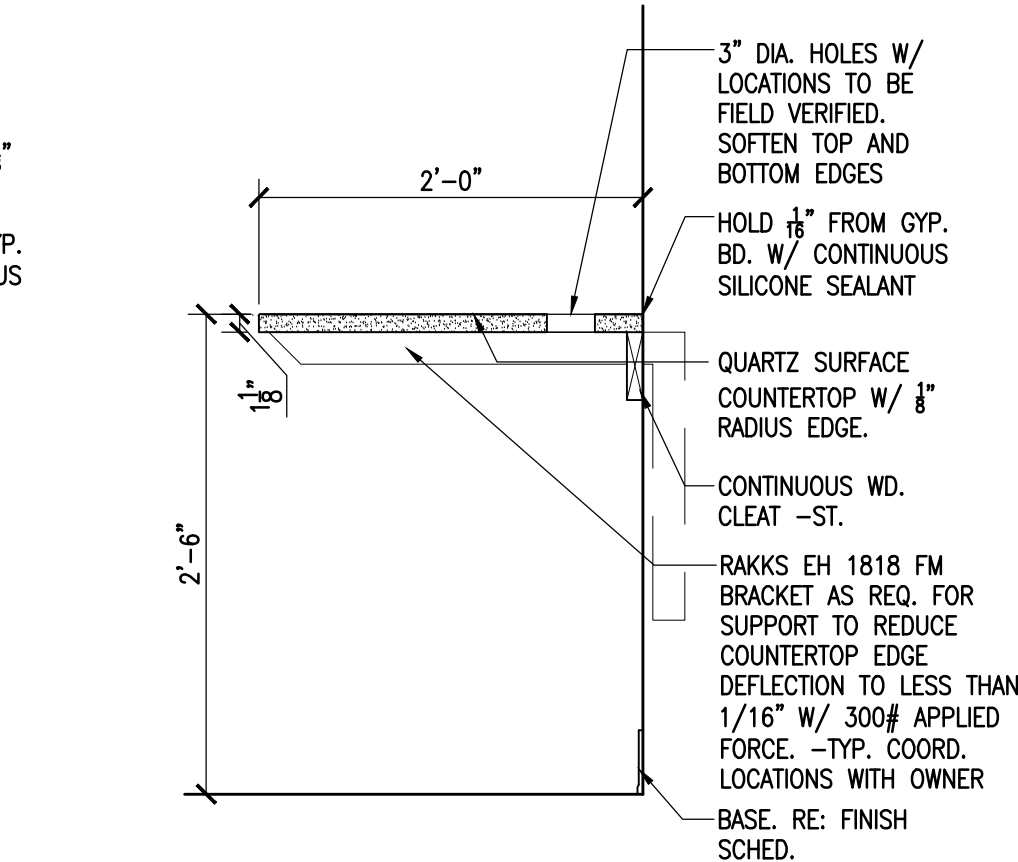


14 CASEWORK DETAIL @ TOILET ROOMS
SCALE: 1"=1'-0"

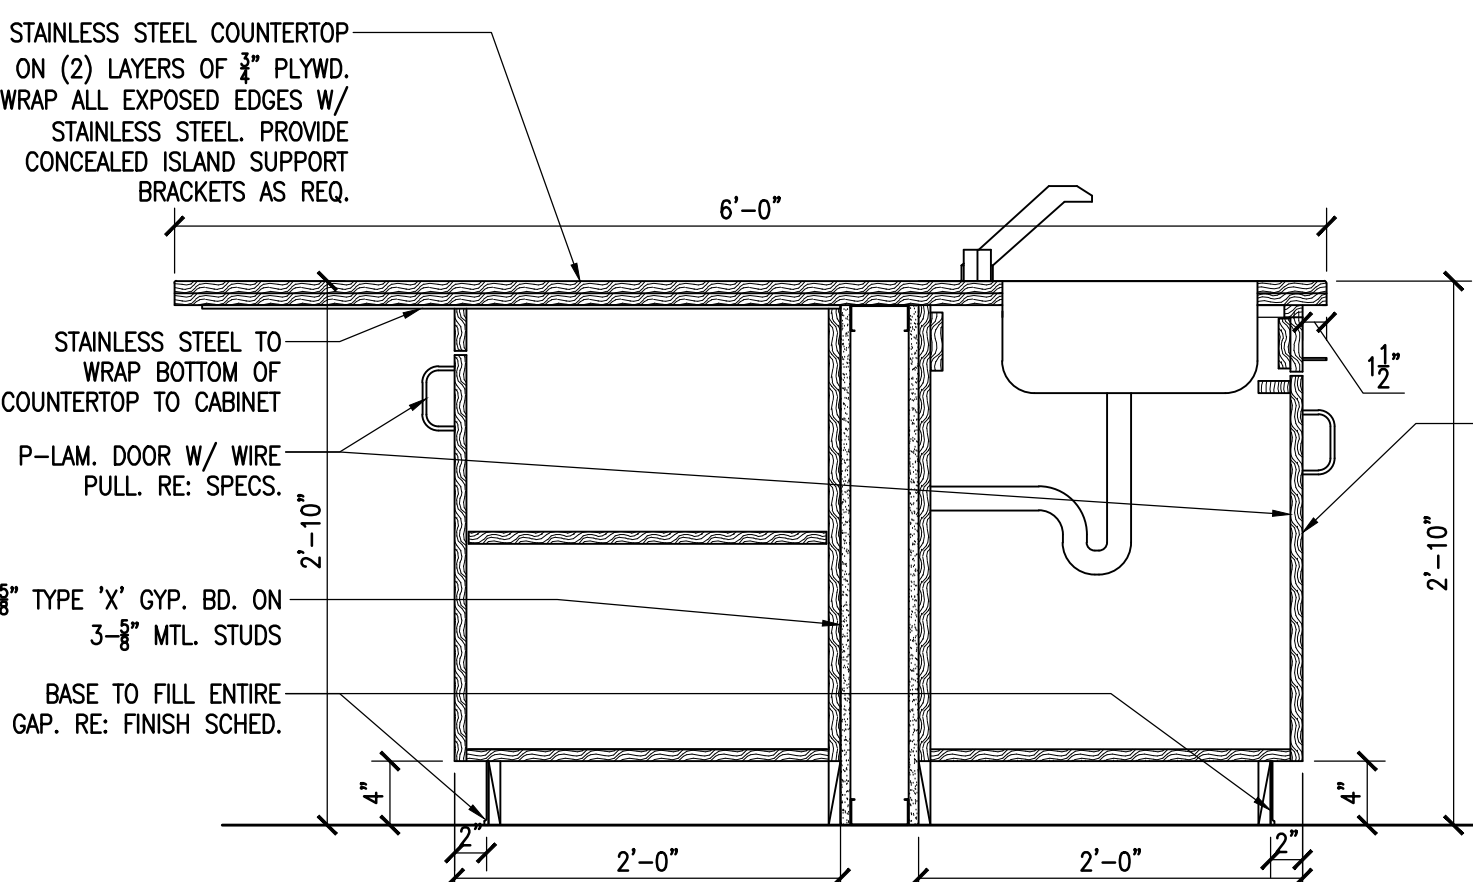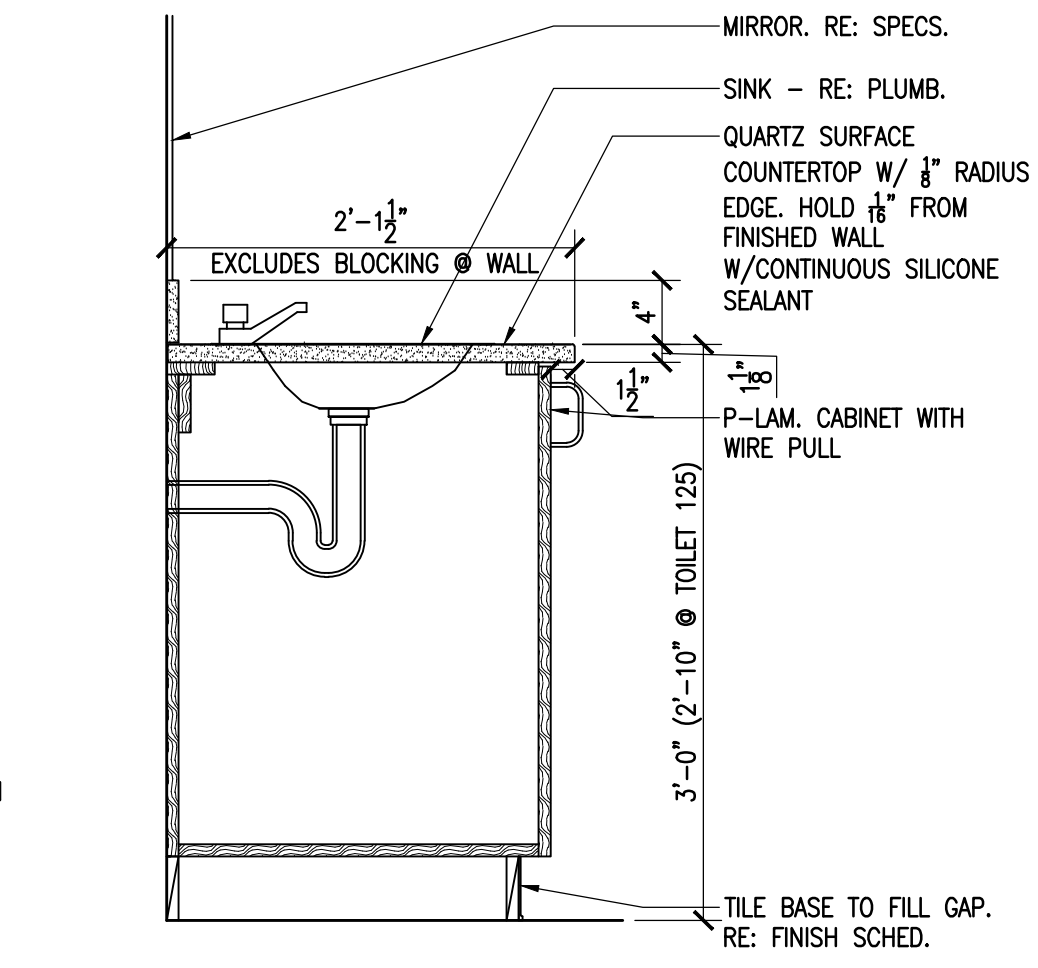


13 CASEWORK DETAIL - KITCHEN
SCALE: 1"=1'-0"

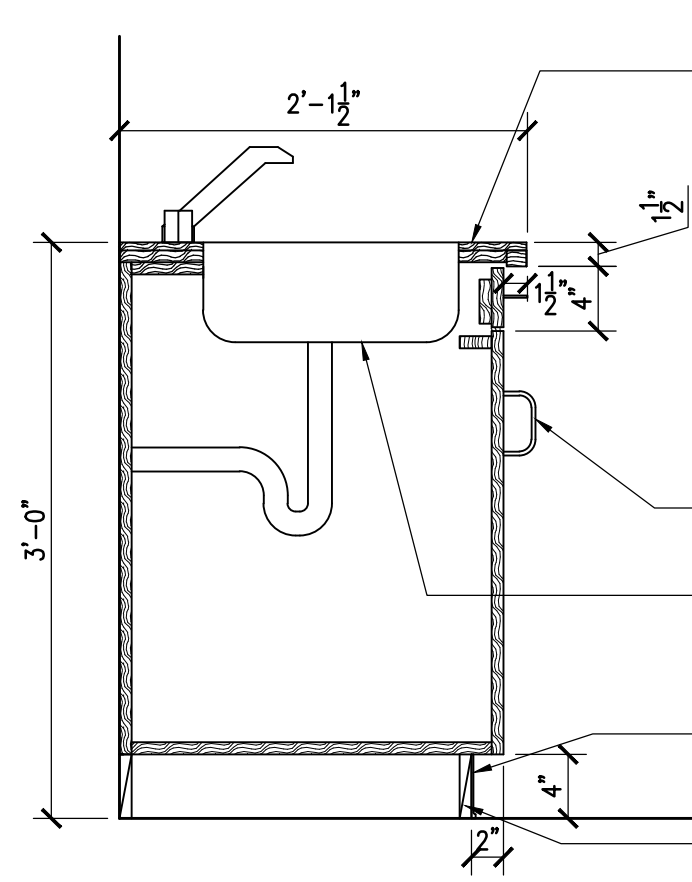


12 CASEWORK DETAIL - KITCHEN
SCALE: 1"=1'-0"

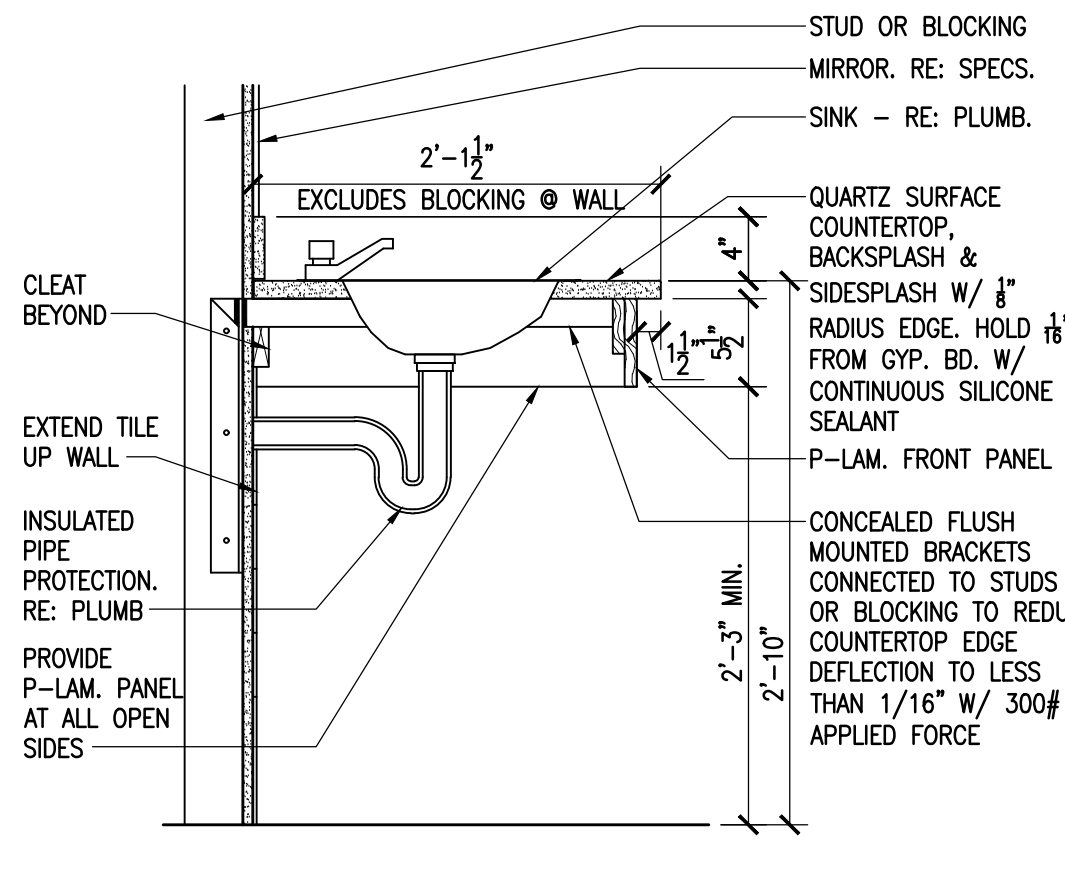


11 CASEWORK DETAIL @ ADA TOILET ROOMS
SCALE: 1"=1'-0"

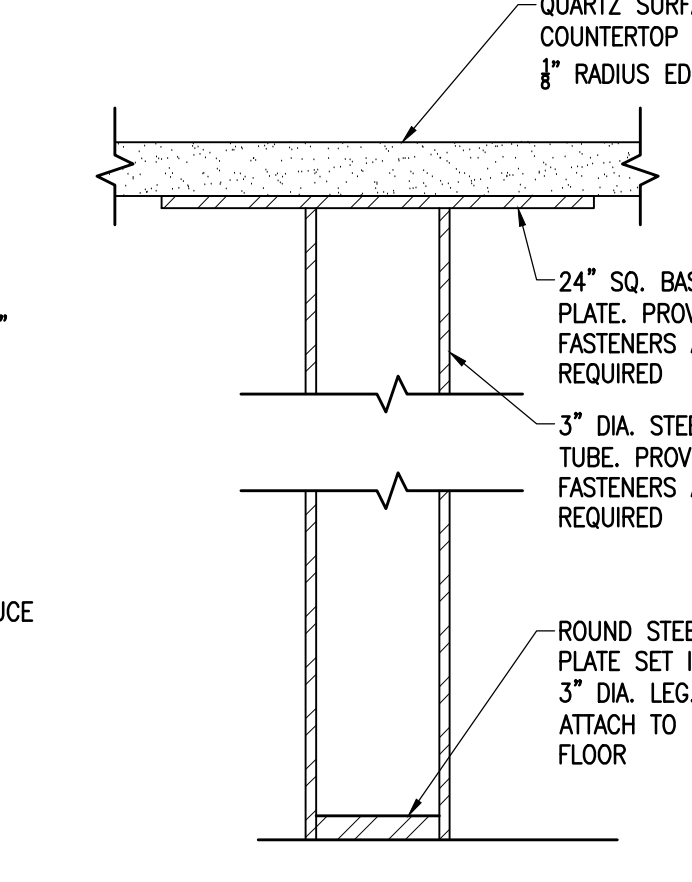


10 DESK LEG DETAIL
SCALE: 3"=1'-0"

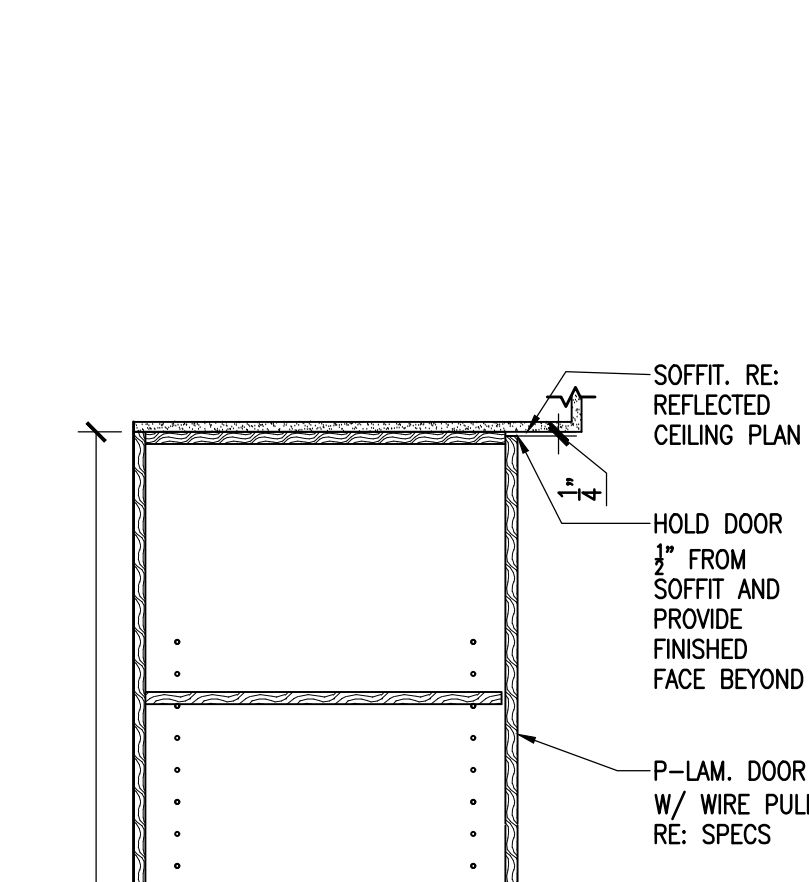


5 CASEWORK DETAIL - LAUNDRY
SCALE: 1"=1'-0"

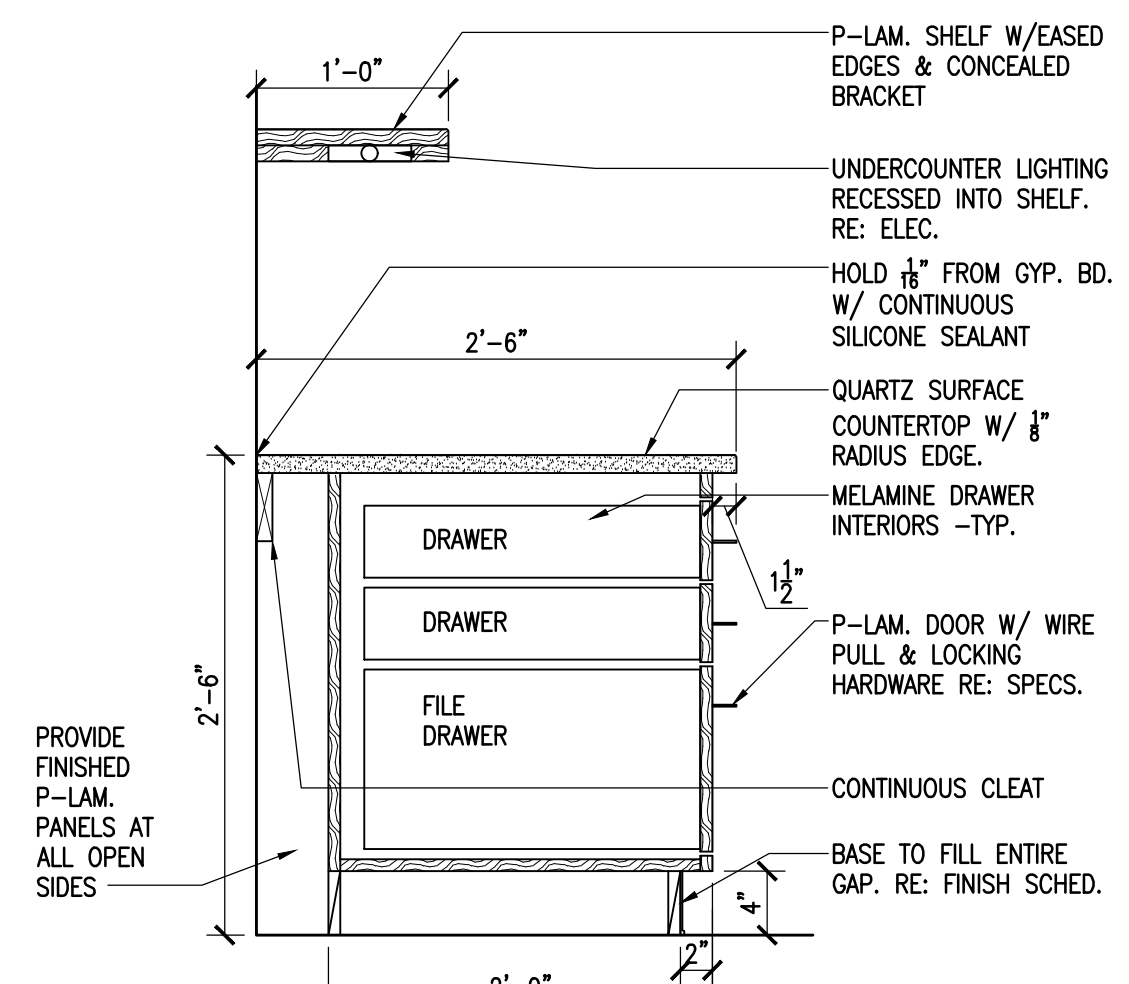


9 CASEWORK DETAIL - OFFICE
SCALE: 1"=1'-0"

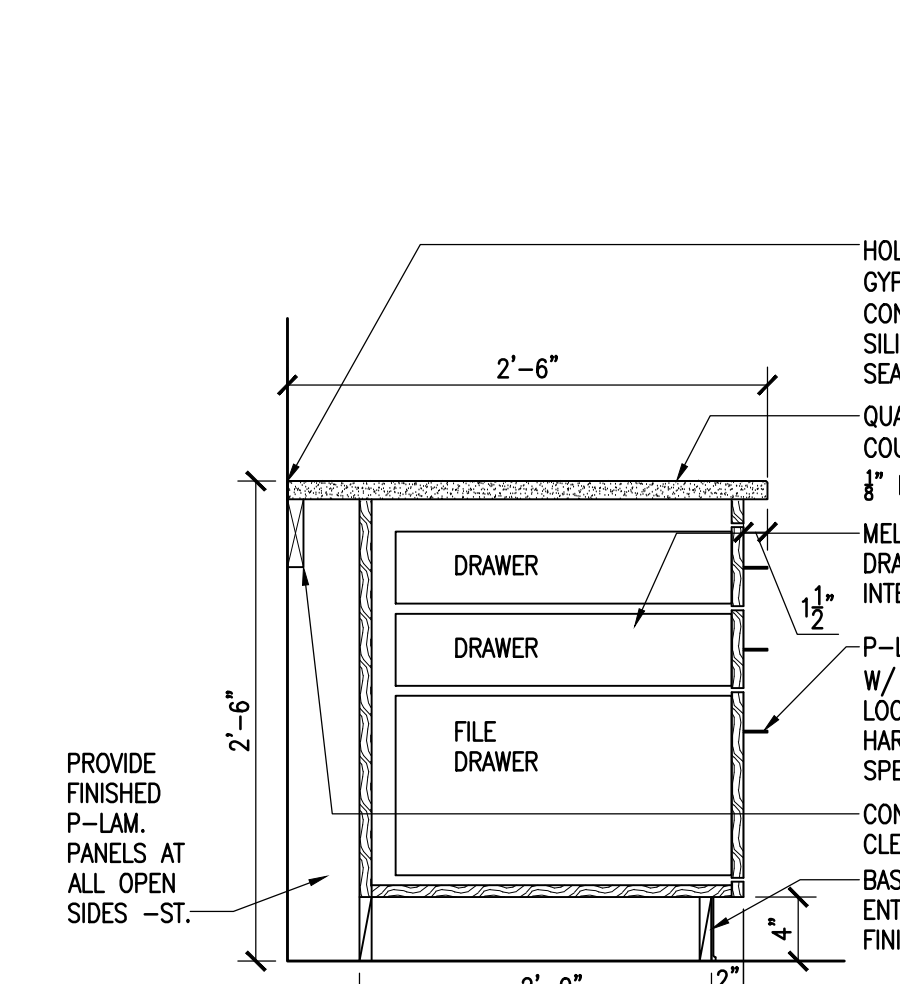


8 CASEWORK DETAIL - OFFICE
SCALE: 1"=1'-0"

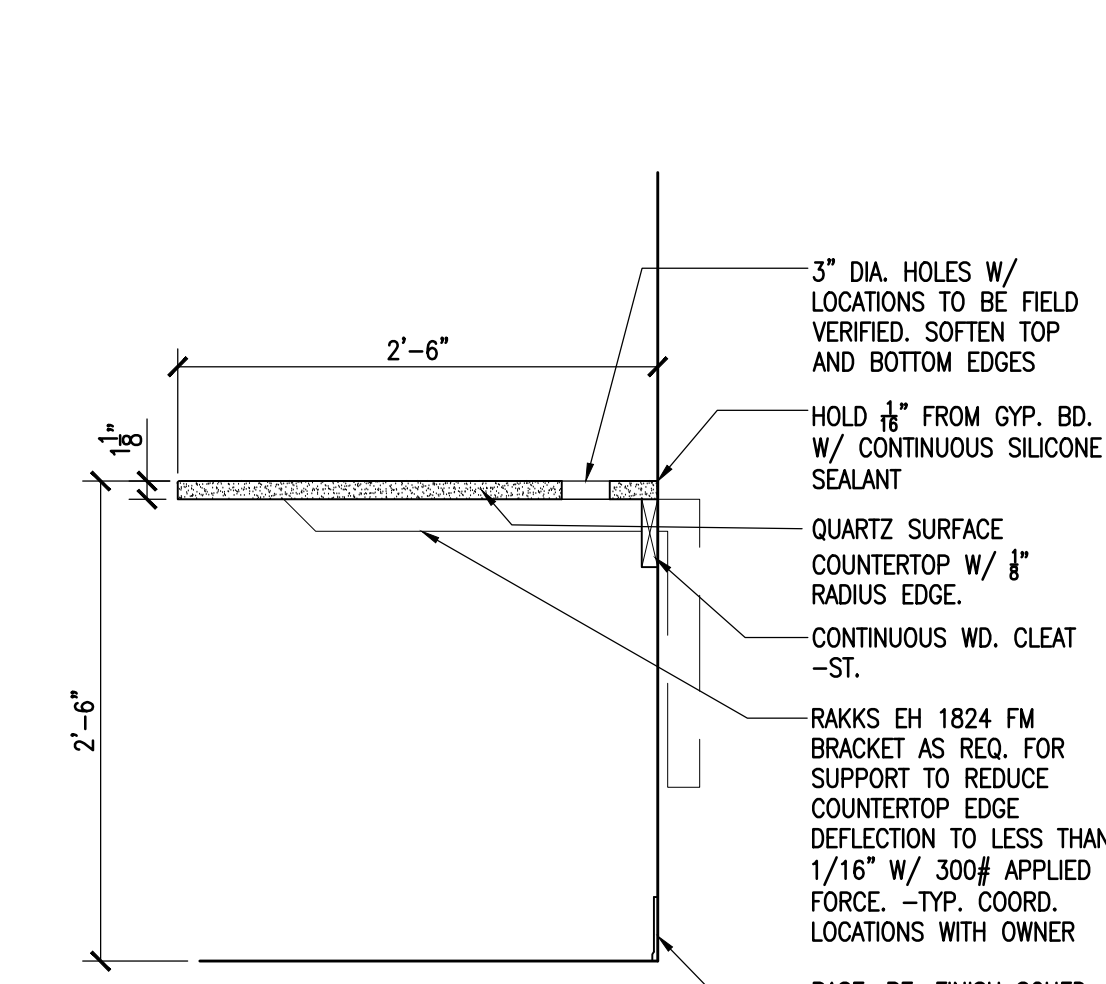


7 DESK DETAIL @ OFFICE
SCALE: 1"=1'-0"

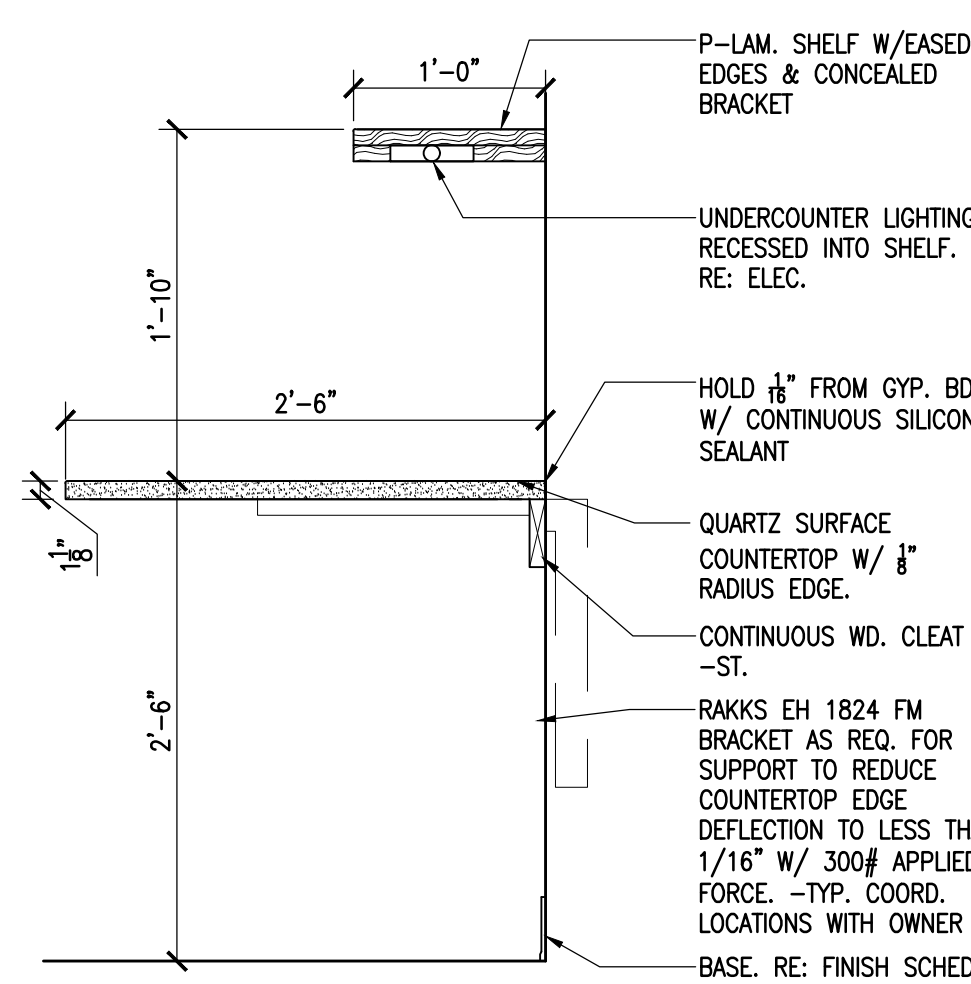


6 DESK DETAIL @ OFFICE
SCALE: 1"=1'-0"

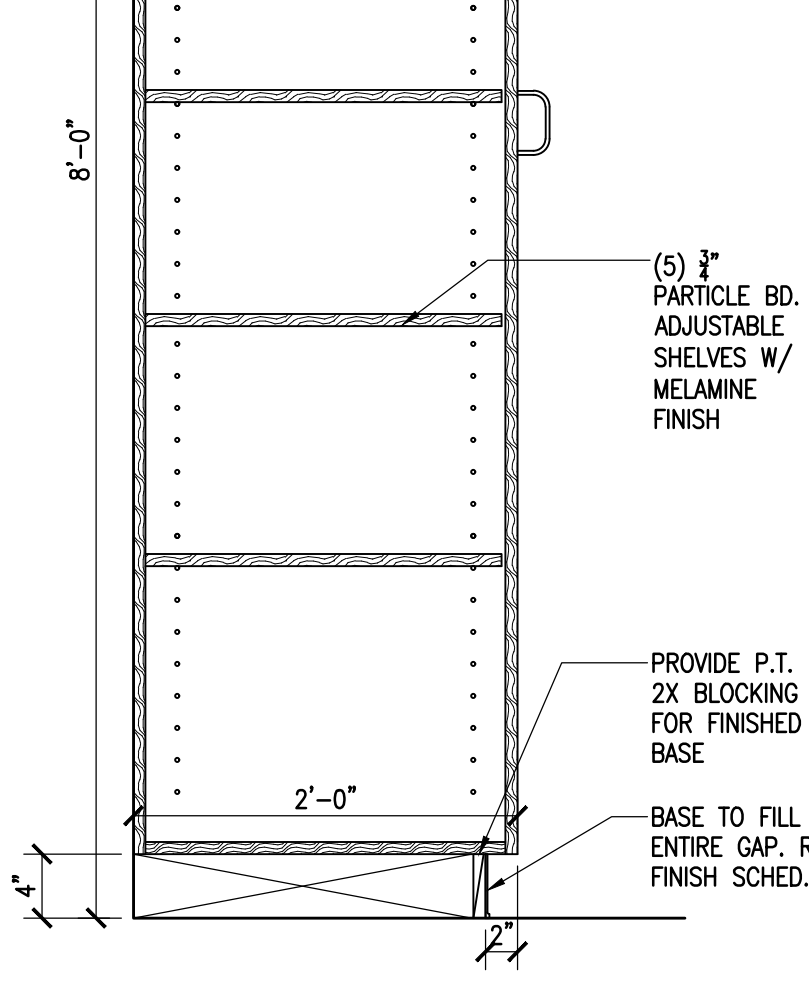


5 CASEWORK DETAIL - LAUNDRY
SCALE: 1"=1'-0"

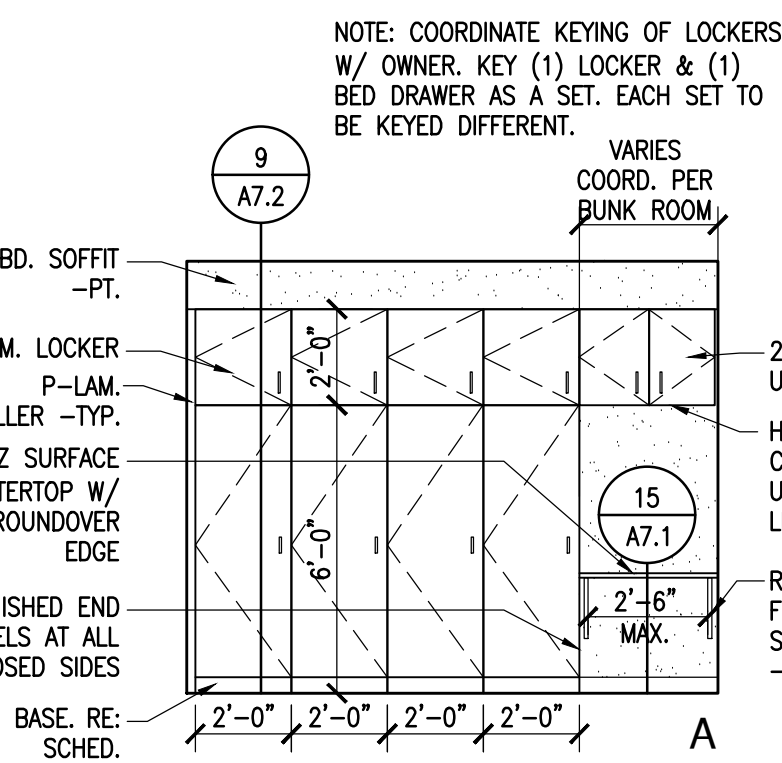


4 INTERIOR ELEVATIONS - BUNK ROOMS
SCALE: 1/4"=1'-0"

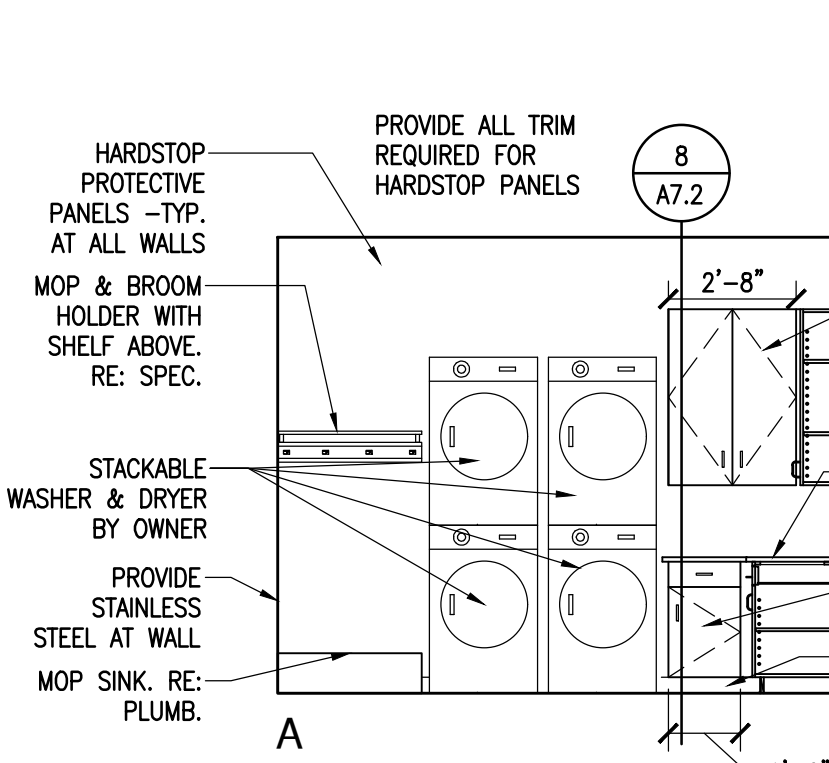


3 INTERIOR ELEVATION - LAUNDRY 109
SCALE: 1/4"=1'-0"

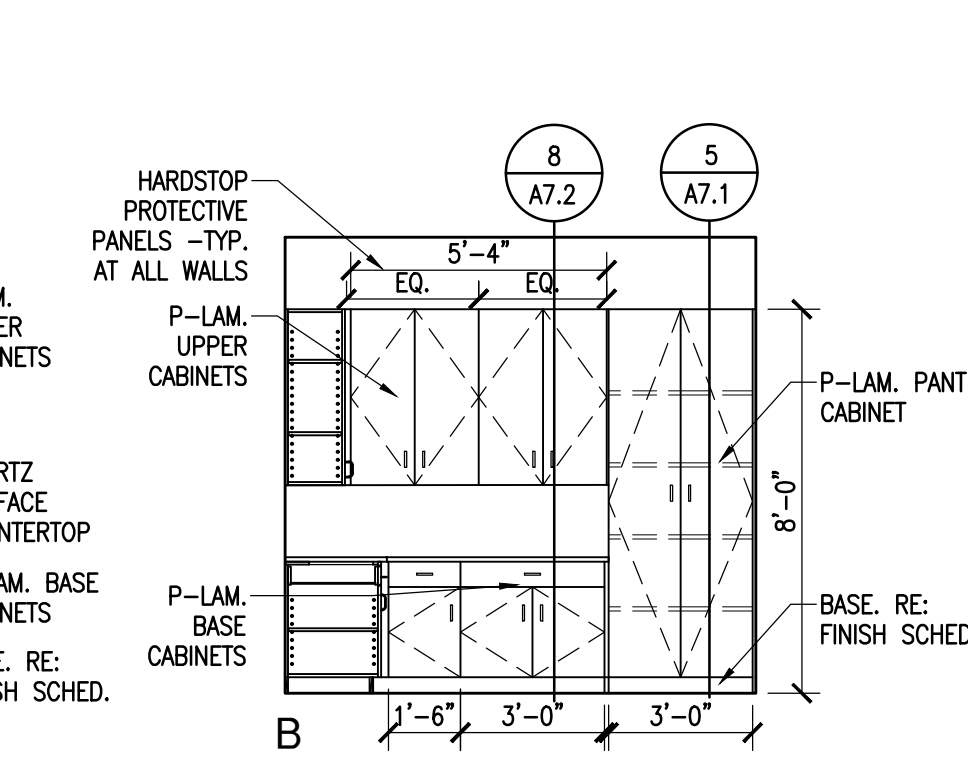

2 INTERIOR ELEVATION - TOILET ROOM 111 & 112 (O.H. & SIM. @ 125)
SCALE: 1/4"=1'-0"

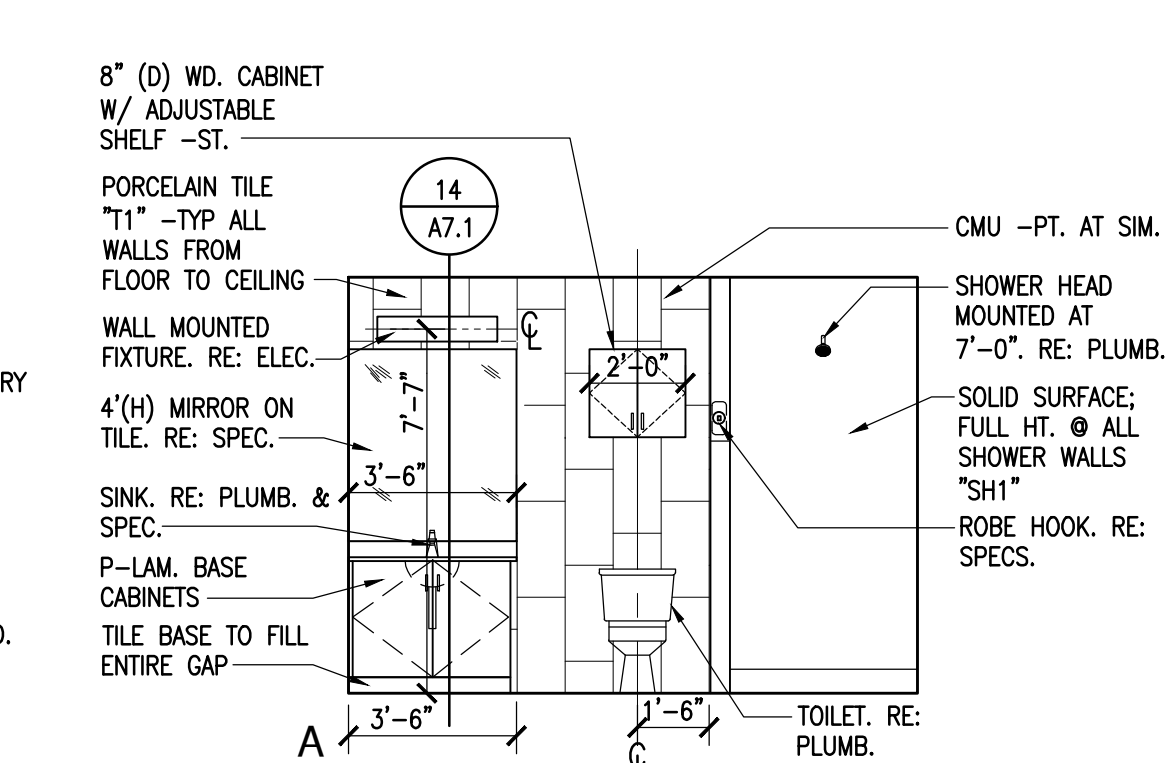

1 INTERIOR ELEVATION - DAY ROOM 108
SCALE: 1/4"=1'-0"

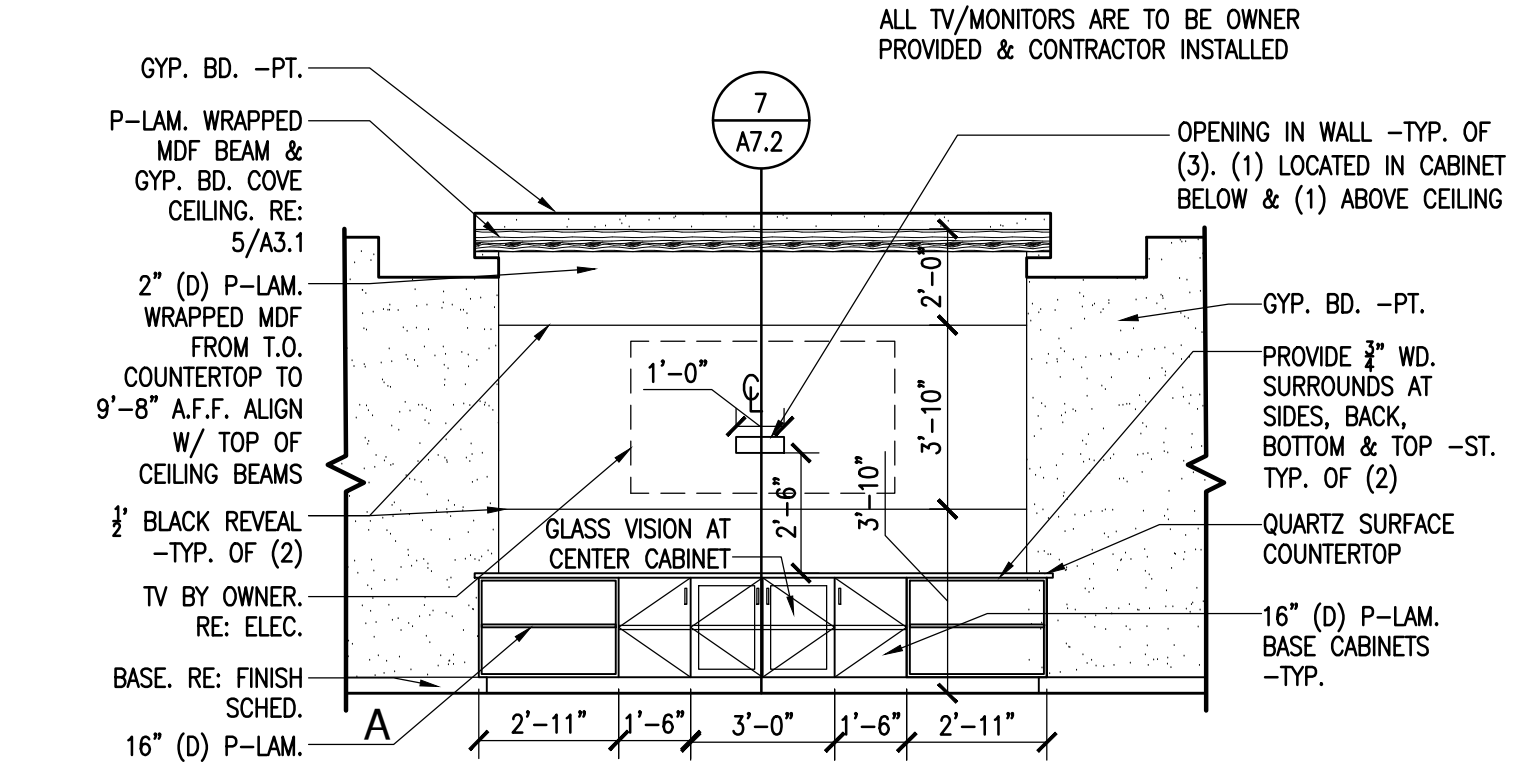

ALLRED & ASSOCIATES

CITY OF THORNTON
FIRE STATION #8

15343 MONACO STREET
THORNTON, COLORADO 80602

ARCHITECTURE | PLANNING | INTERIOR DESIGN
589 BURBANK STREET, SUITE 125, BROOMFIELD, COLORADO 80020
WWW.ALLREDARCH.COM
PHONE: 303.465.4306

BID SET

• JOB NO. 2309


AS NOTED

INTR. ELEV. &
CASEWORK DTLS


REVISION NAME	DATE

ISSUE DATE: 2024 0927


A7.1

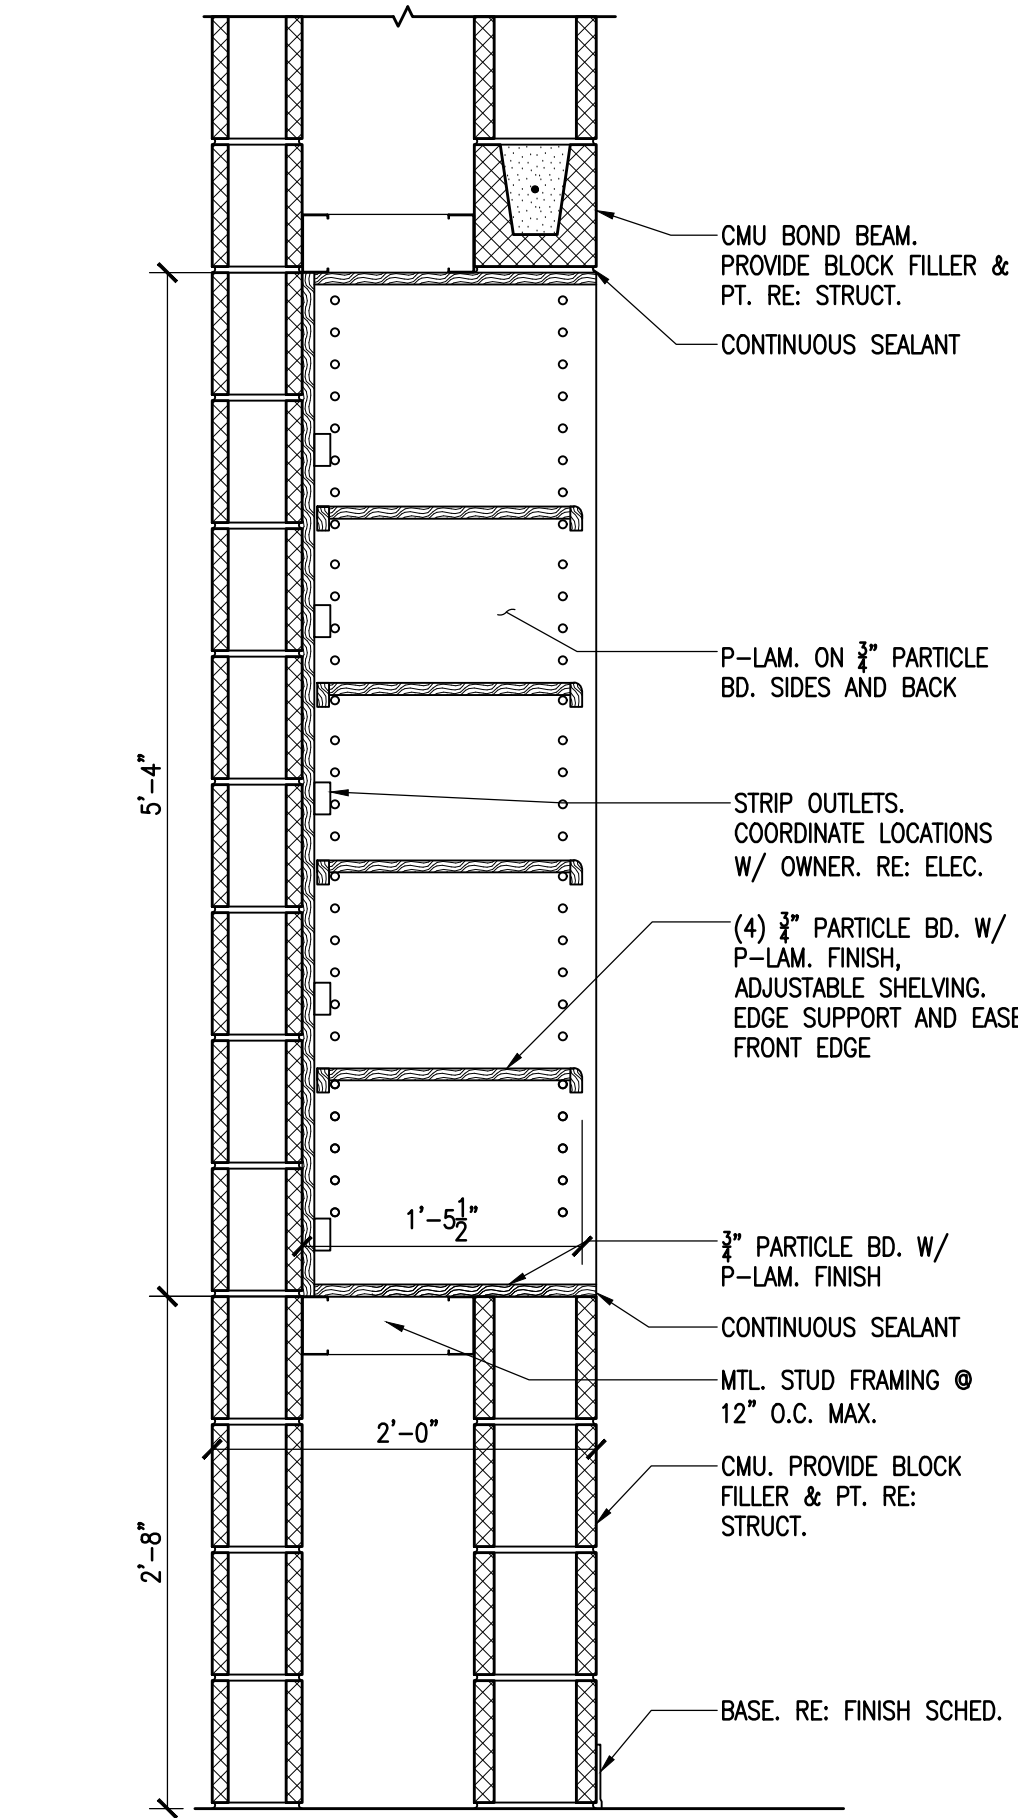


10 CASEWORK DETAIL - APPARATUS BAYS
SCALE: 1"=1'-0"

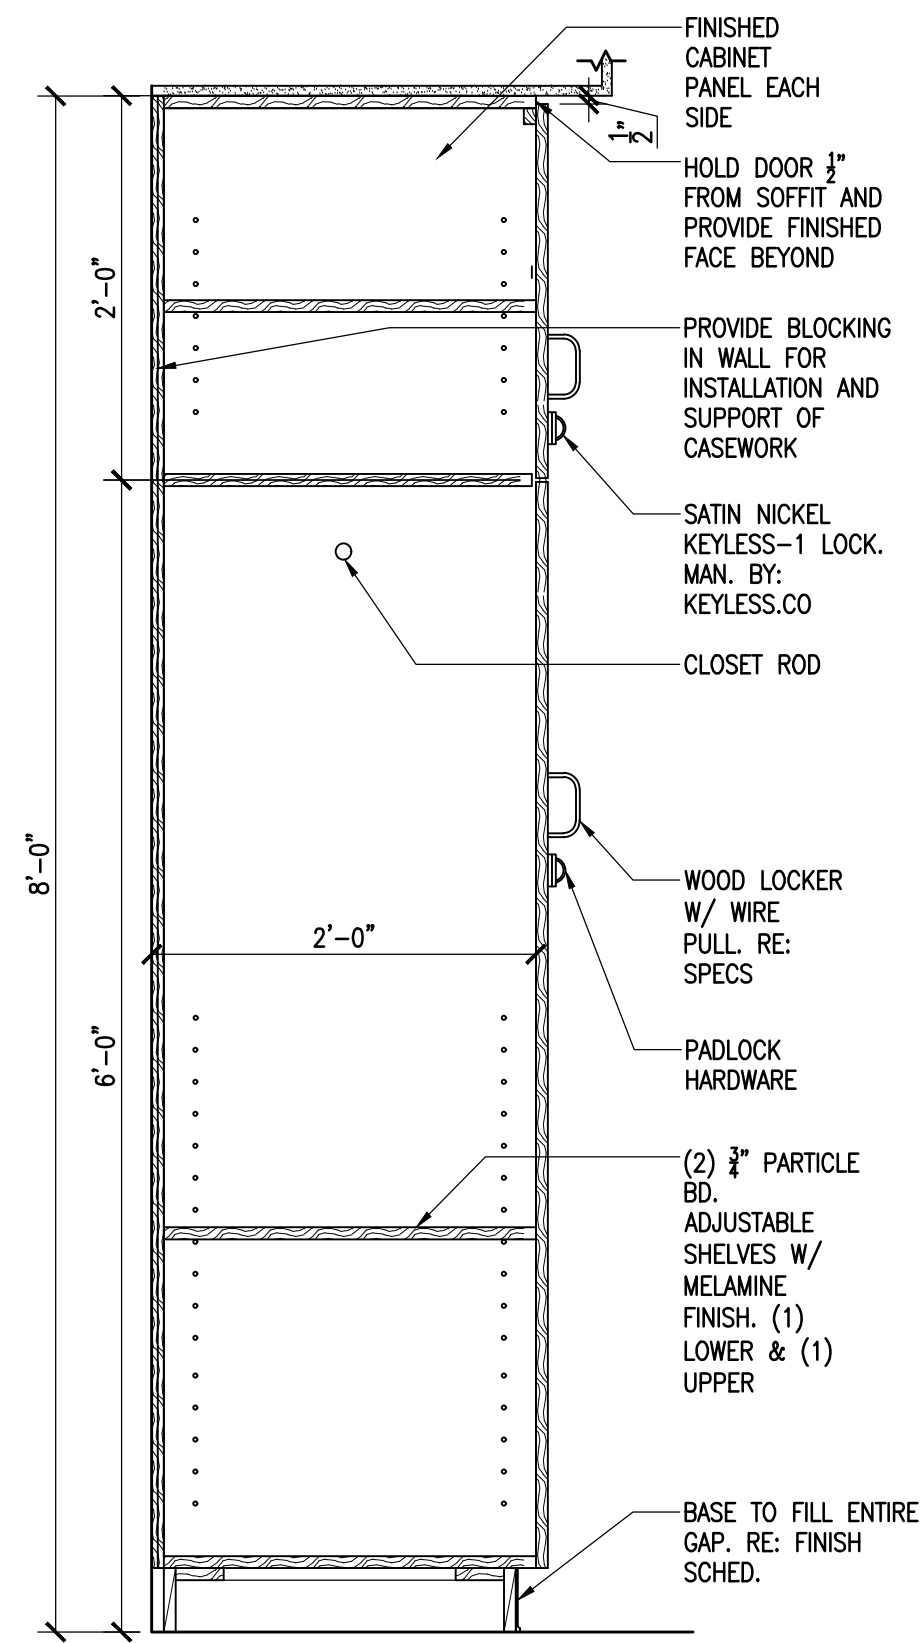


9 CASEWORK DETAIL - BUNK ROOMS
SCALE: 1"=1'-0"

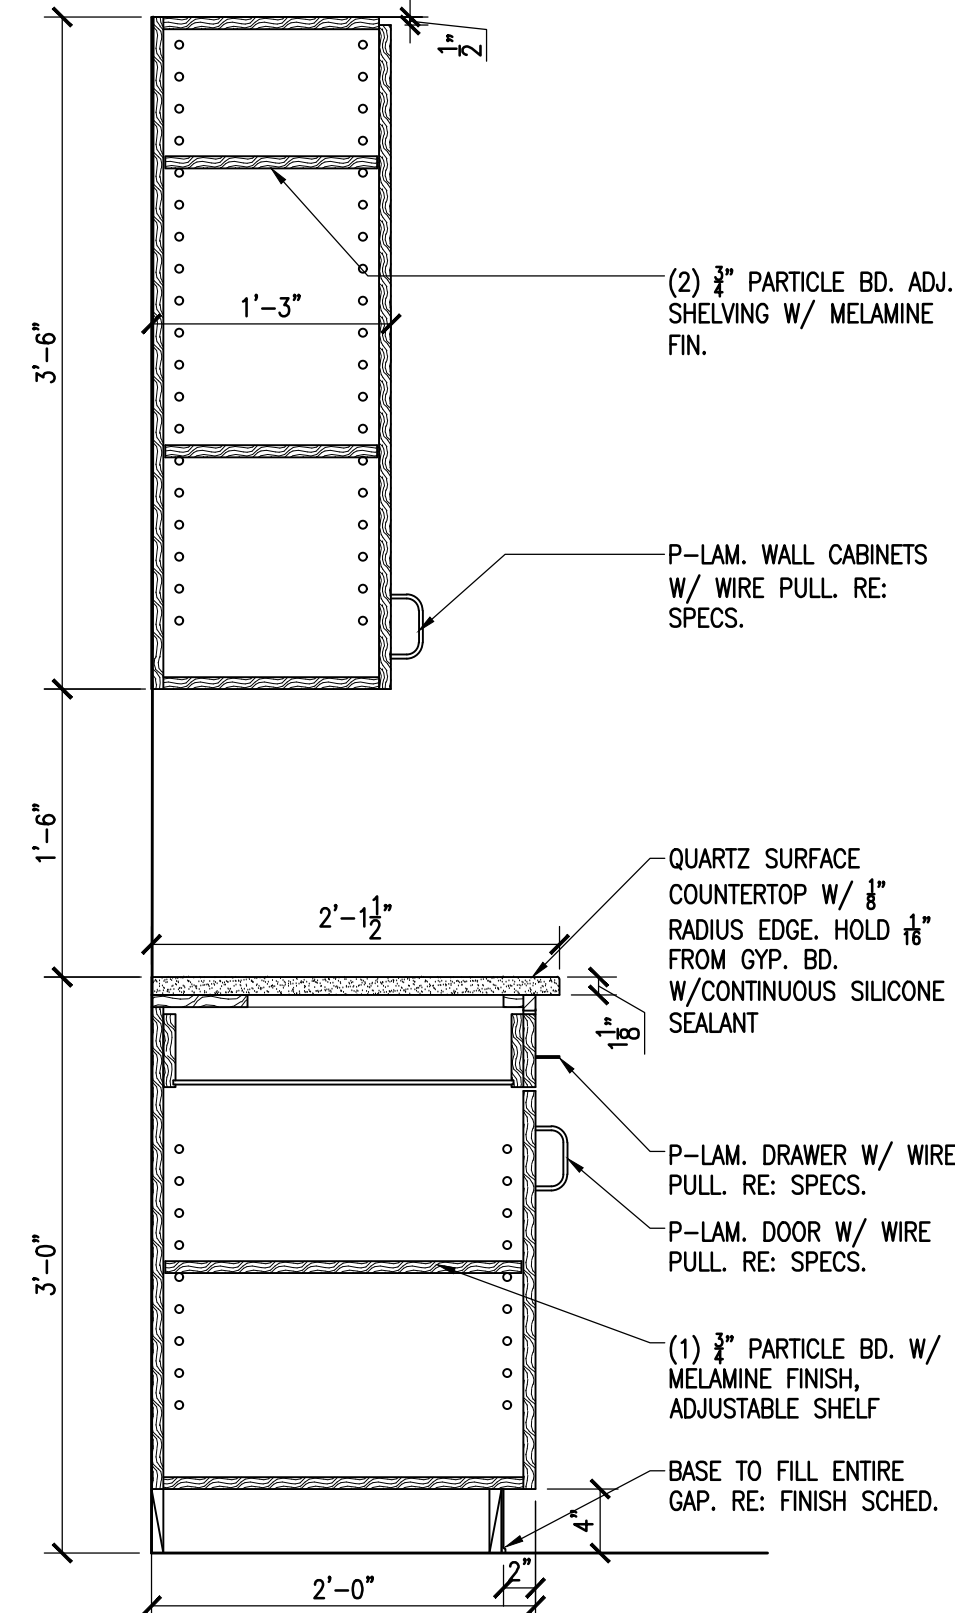


8 CASEWORK DETAIL
SCALE: 1"=1'-0"

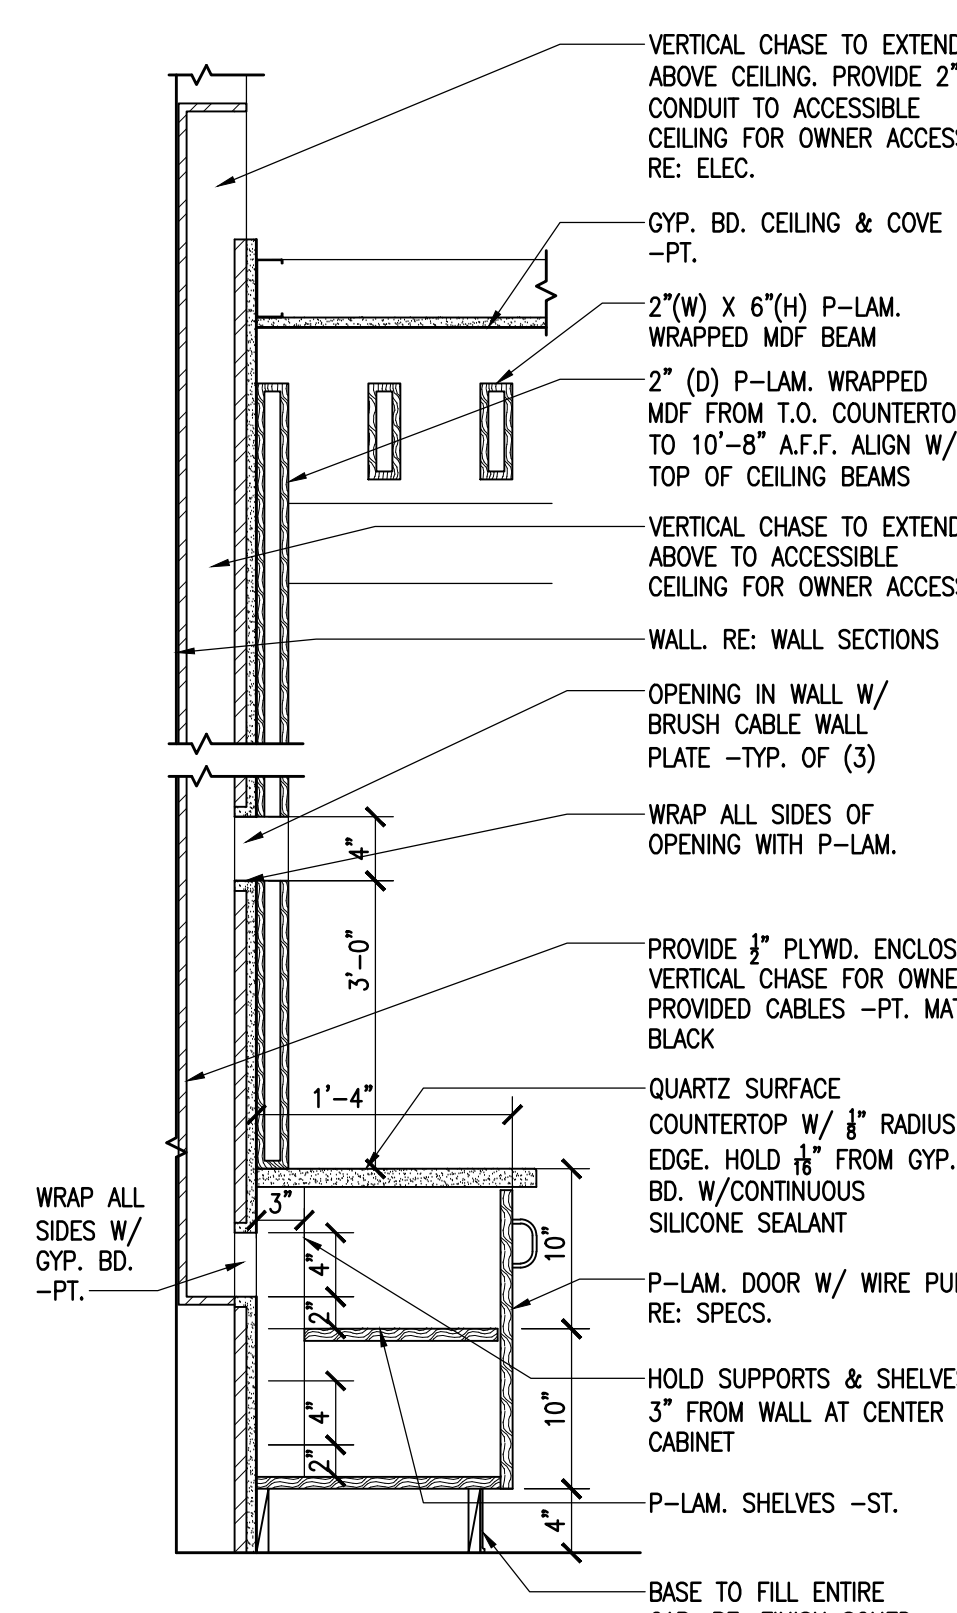


7 SHELVING DETAIL
SCALE: 1"=1'-0"

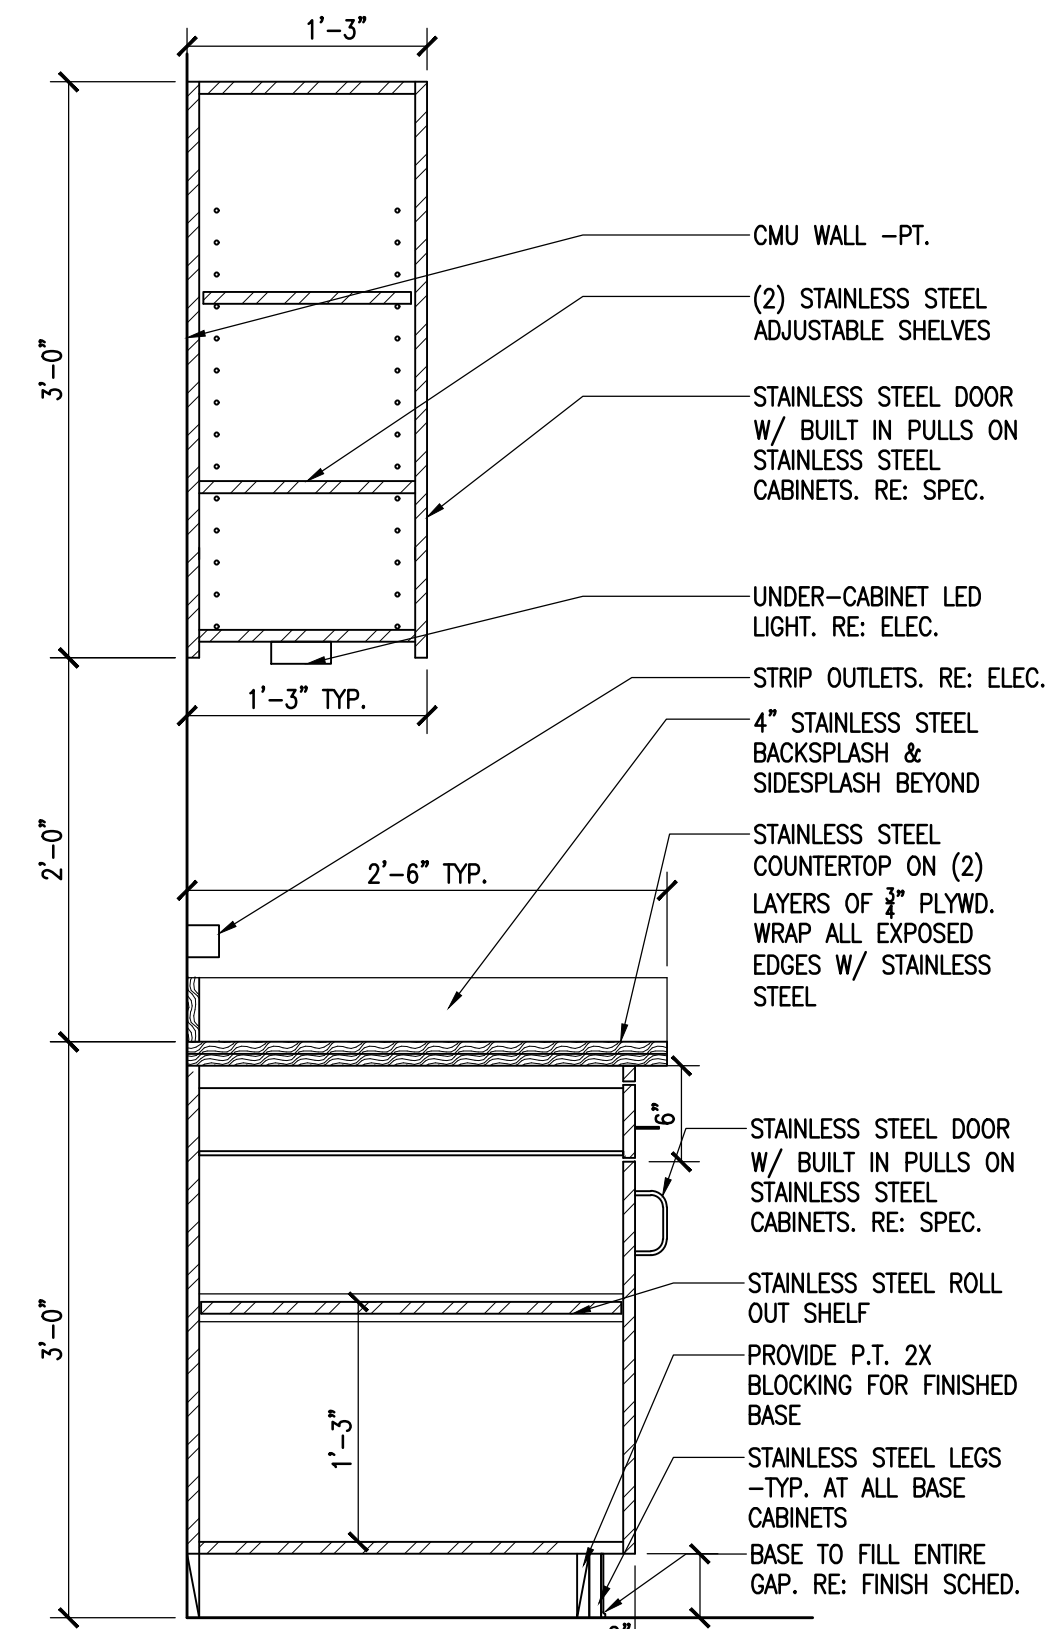


6 CASEWORK DETAIL - WORK ROOM
SCALE: 1"=1'-0"

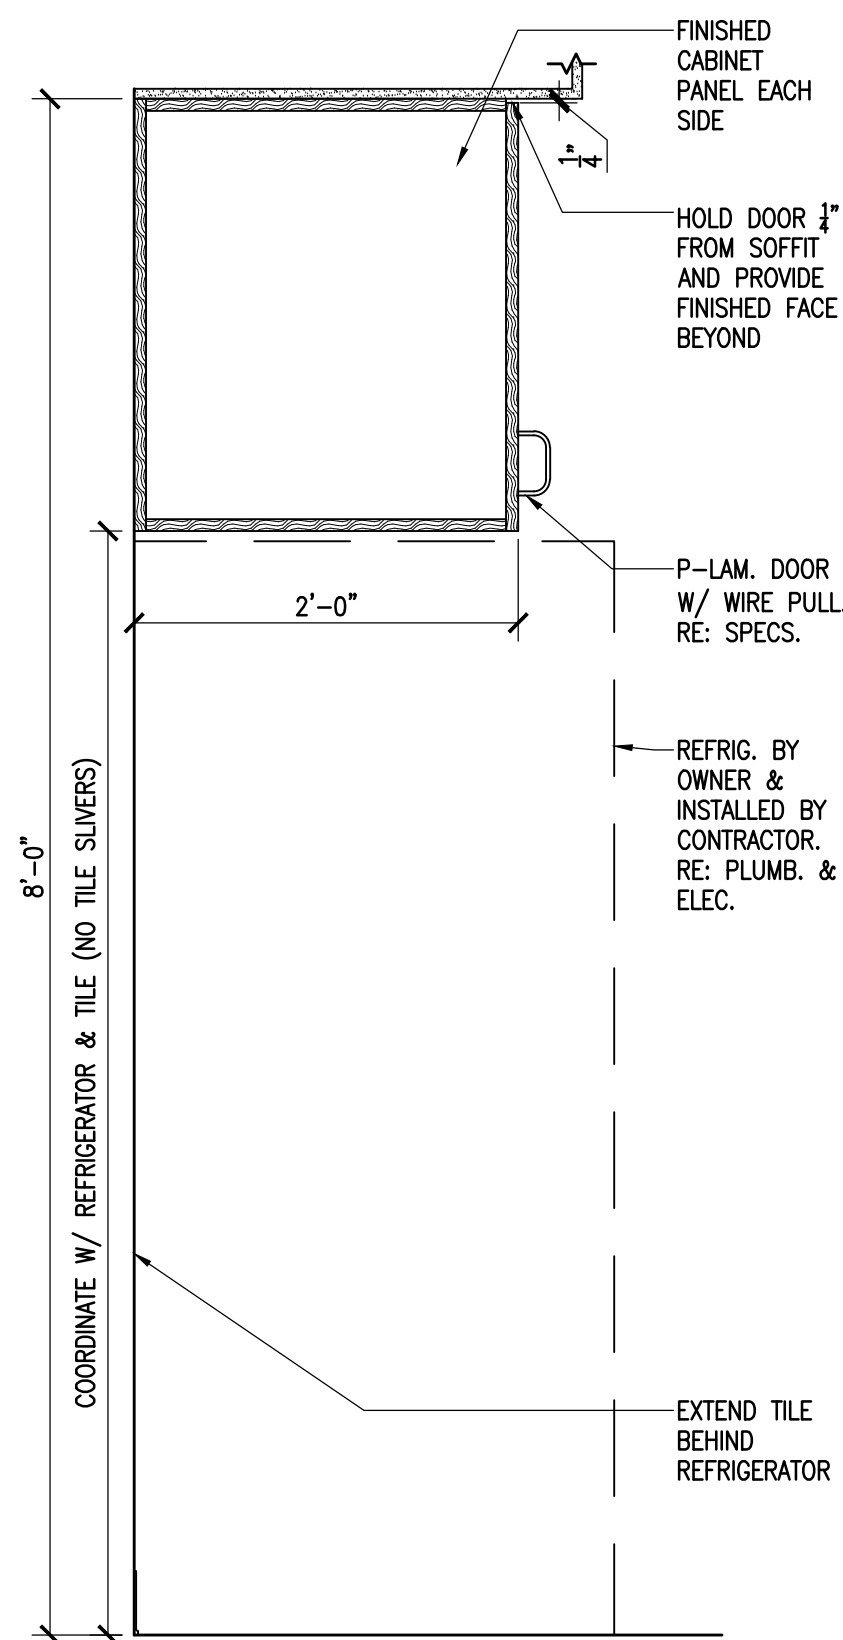


5 CASEWORK DETAIL - KITCHEN
SCALE: 1"=1'-0"

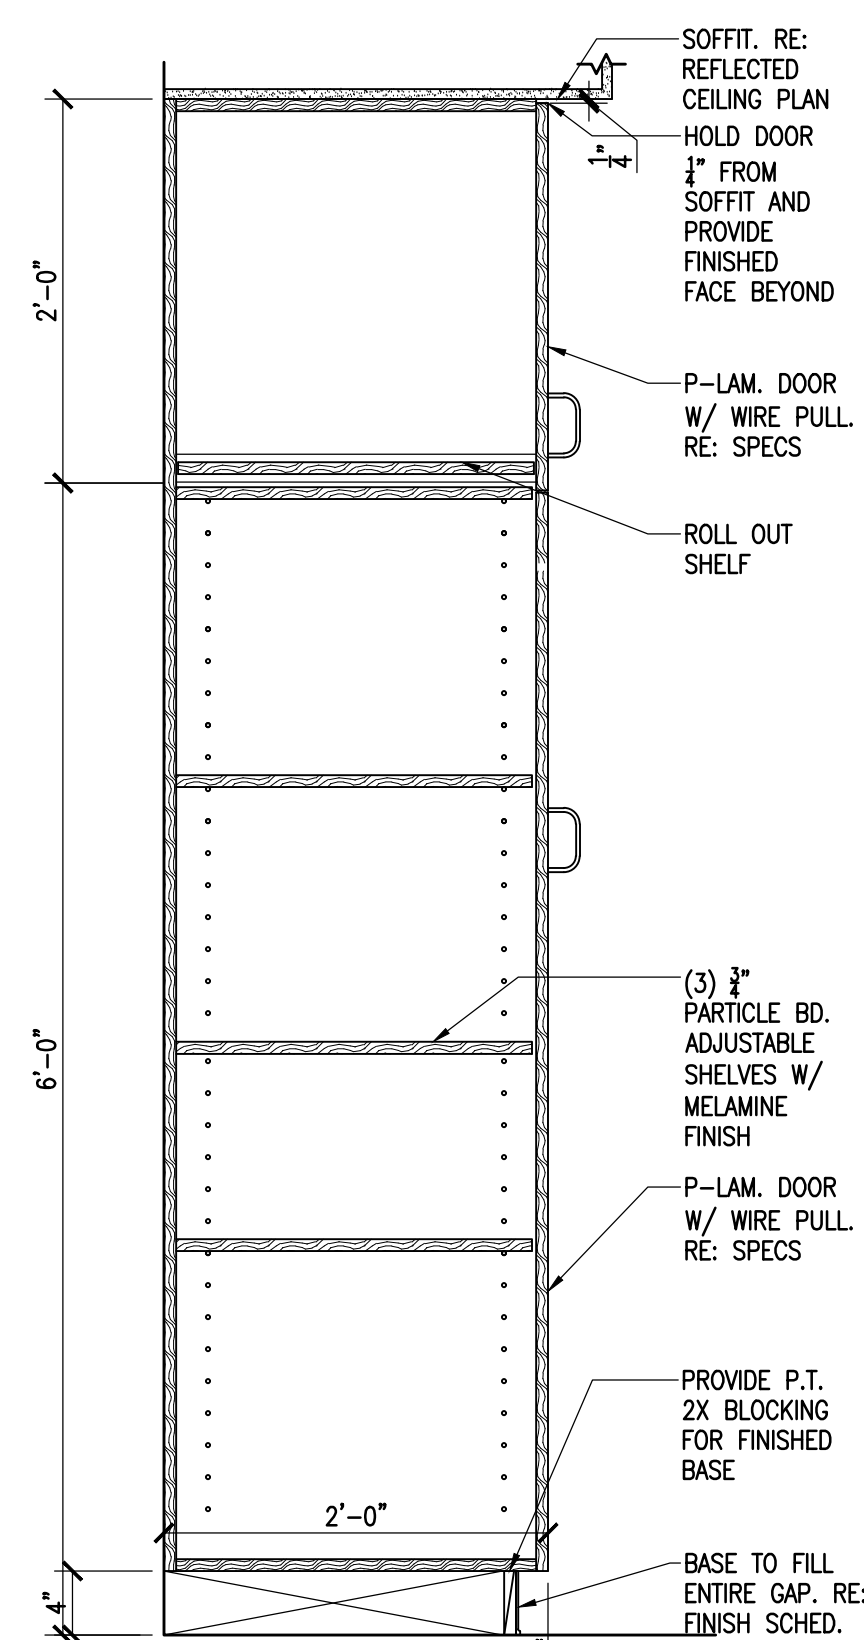


4 CASEWORK DETAIL - KITCHEN
SCALE: 1"=1'-0"

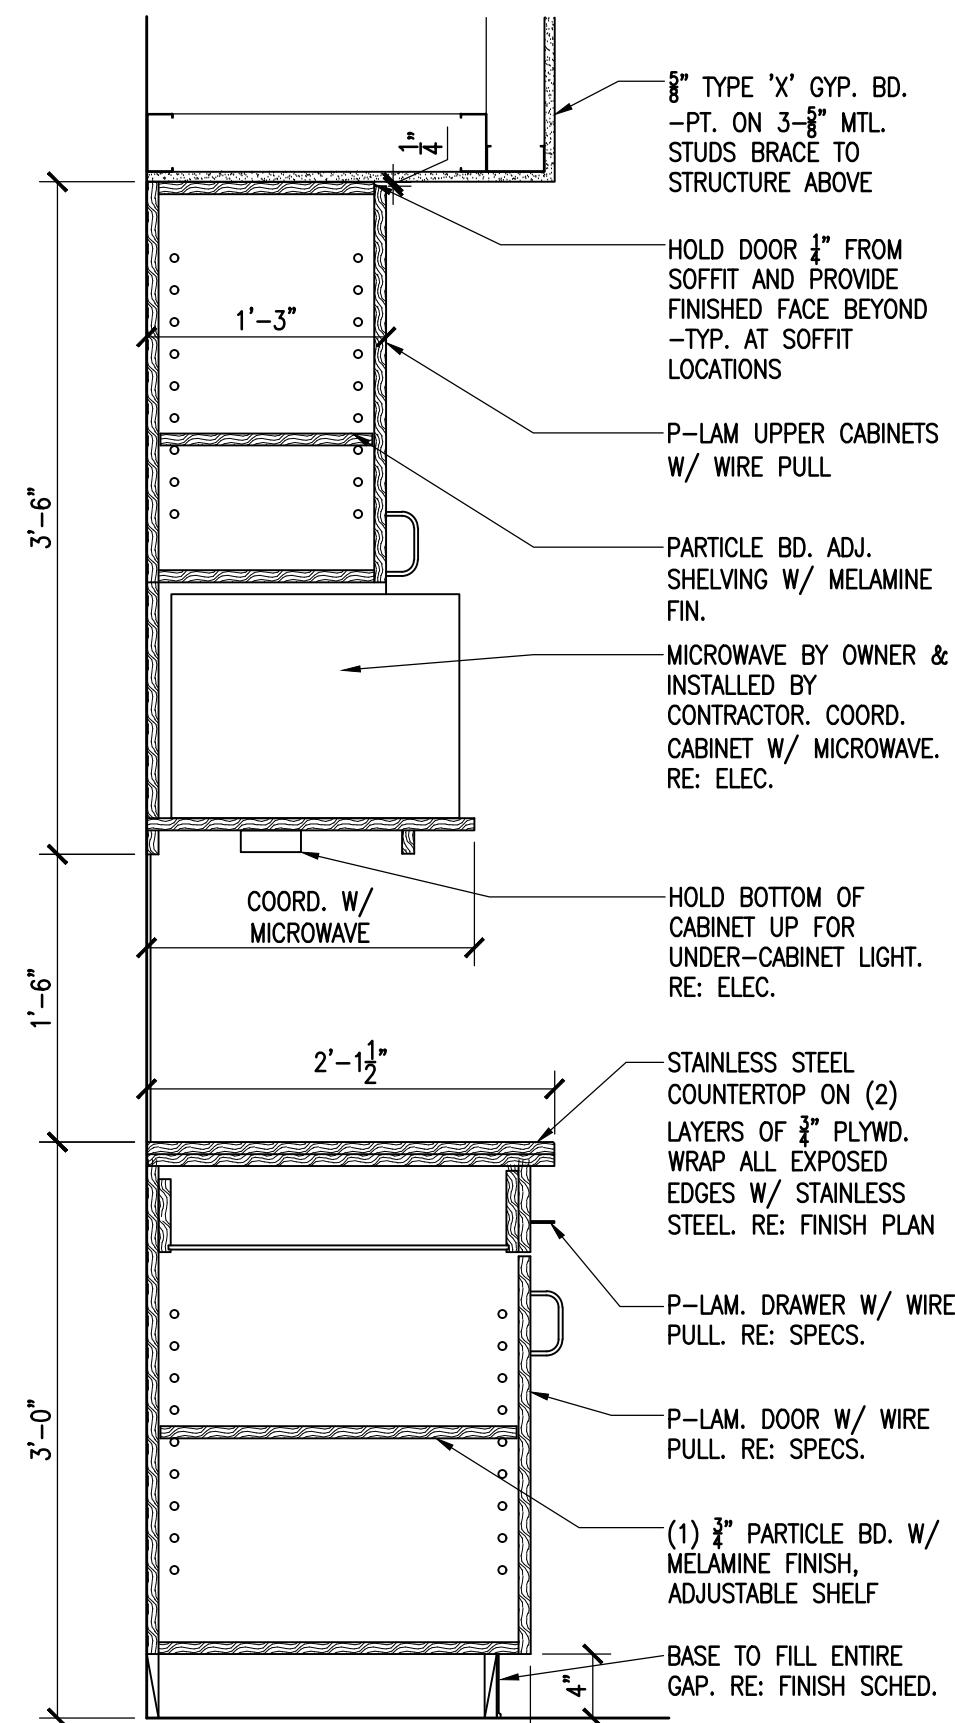

3 CASEWORK DETAIL - KITCHEN
SCALE: 1"=1'-0"

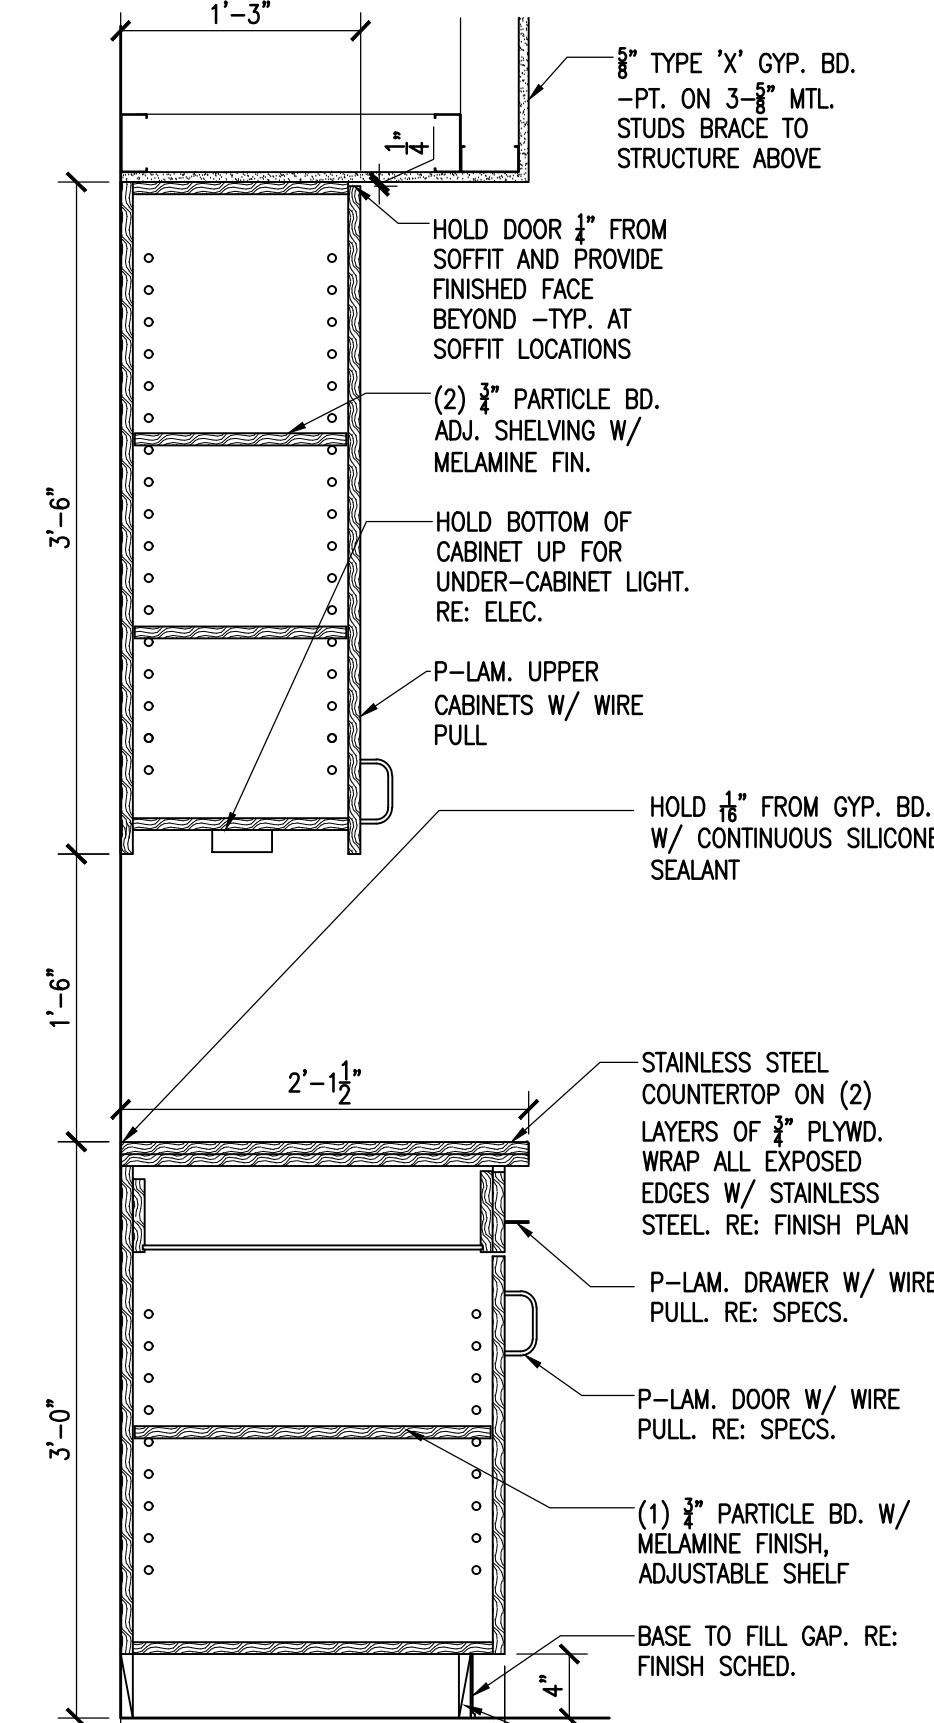

2 CASEWORK DETAIL - KITCHEN
SCALE: 1"=1'-0"

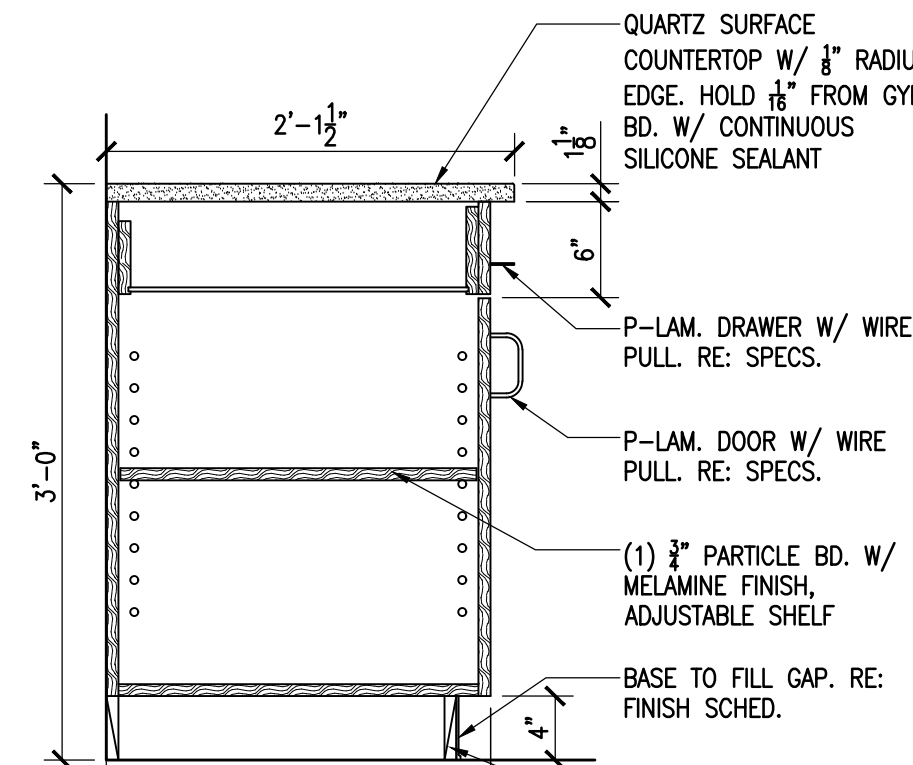

1 CASEWORK DETAIL
SCALE: 1"=1'-0"

ALLRED & ASSOCIATES

ARCHITECTURE | PLANNING | INTERIOR DESIGN

589 BURLAND STREET, SUITE 125, BROOMFIELD, COLORADO 80020

PHONE: 303.465.4306

WWW.ALLREDARCH.COM

JOB NO. 2309

BID SET

AS NOTED

CITY OF THORNTON

FIRE STATION #8

15343 MONACO STREET


THORNTON, COLORADO 80602

REVISION NAME	DATE

ISSUE DATE: 2024 0927

CASEWORK DETAILS




A7.2



Architectural floor plan of the second floor of a building. The plan shows several rooms and corridors, with dimensions and room numbers indicated. The rooms are labeled K, J1, J2, H, G, and F. The plan includes dimensions for rooms and corridors, as well as room numbers. A note indicates that the contractor should coordinate emergency escape window requirements with the IBC Section 1030, specifying a net clear opening of 5.7 square feet. The plan also shows the location of the main entrance and the main staircase.














COORDINATE WINDOW SWING & FINISH LOCATIONS W/ ELEVATIONS & WALL TYPES


CONTRACTOR TO COORDINATE EMERGENCY ESCAPE WINDOW REQ. PER IBC SECT. 1030 WITH A NET CLEAR OPENING OF 5.7 SQ. FT.

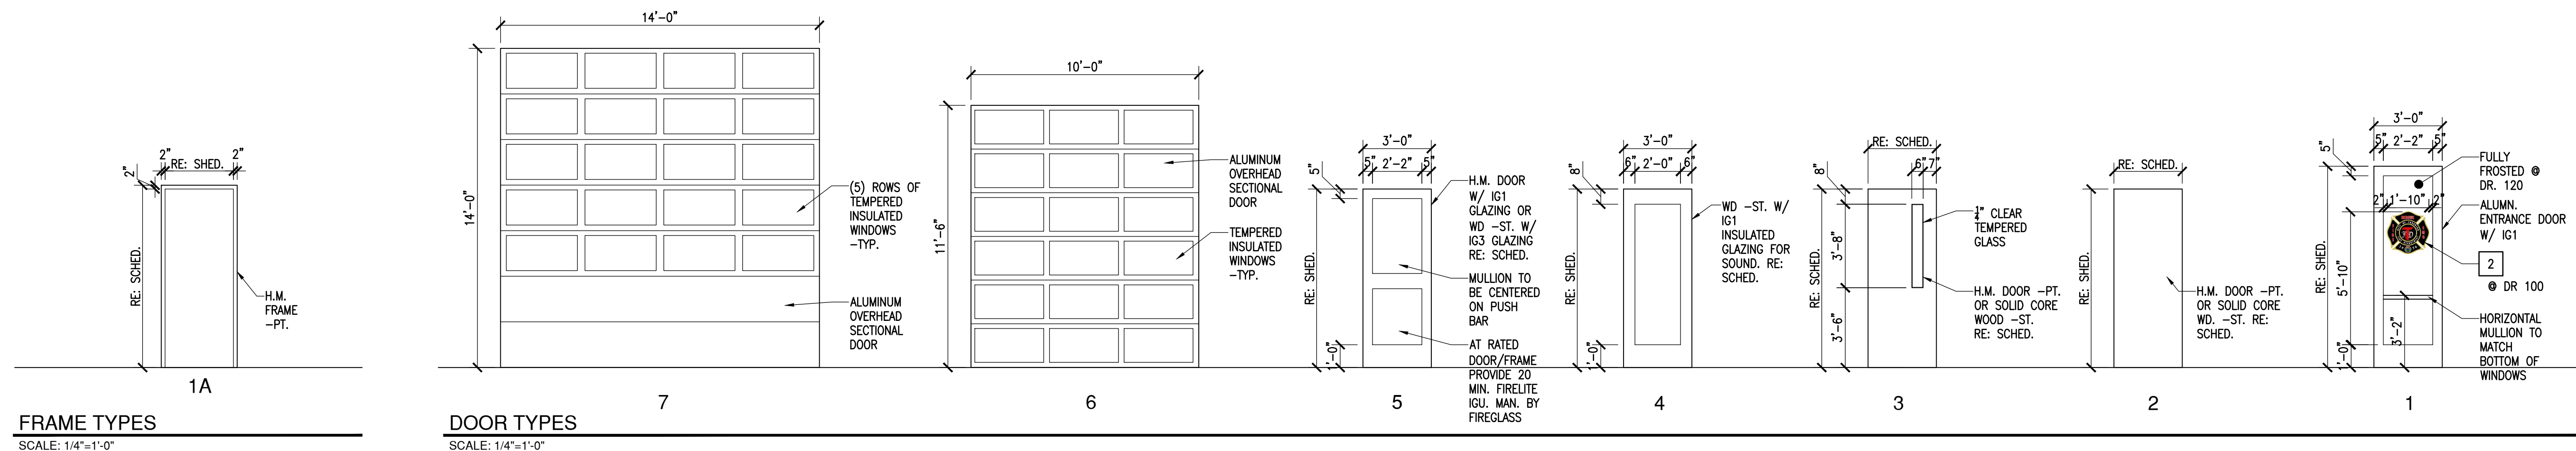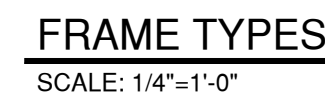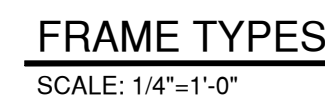


DOOR & WINDOW SCHEDULE NOTES	
1. ALL PROJECT GLAZING TO BE TEMPERED	5. TEMPERED 1" INSULATED GLASS AT ALL EXTERIOR DOORS.
2. CONTRACTOR TO V.I.F. DIMS PRIOR TO SUBMITTAL OF SHOP DRAWINGS.	6. WHERE NECESSARY PROVIDE STOREFRONT INFILL PANEL, COLOR TO MATCH STOREFRONT.
3. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY ALL WALL WIDTHS BEFORE ORDERING DOOR FRAMES. ALL DOOR FRAMES SHOULD WRAP FINISH MATERIALS UNLESS SHOWN OTHERWISE.	7. COORD. DOOR UNDERCUTS W/ MECH. DWGS.
4. DO NOT SCALE DRAWINGS: DIMENSIONS GOVERN, LARGE SCALE DETAILS GOVERN OVER SMALL SCALE.	8. RE: ARCHITECTURAL FLOOR PLANS FOR DOOR & WINDOW LOCATIONS
A. STOREFRONT WINDOW WALLS ARE DIMENSIONED FROM EDGE OF MUDGON EDGE OF MUDGON.	9. LIQUID FLASH & SEAL FULL WIDTH OF ALL WINDOW AND DOOR FRAMES & ACROSS RIGID INSULATION.
B. WINDOW ASSEMBLY SIZES SHOWN ON DRAWINGS ARE NOMINAL, ACTUAL SIZES WILL BE SMALLER. CONTRACTOR TO VERIFY IN FIELD.	10. INTERIOR CONC. BLOCK @ FITNESS RM. 119 TO BE "RAW" / UNFINISHED. RE: SPEC

DOOR & WINDOW SCHEDULE LEGEND			
1	PROVIDE SINGLE SHADES. RE: SPEC.	6	STOREFRONT SYSTEM W/ IG1 THERMAL BREAK GLAZING. U VALUE = .38 RE: SPEC
2	FROSTED FILM LOGO. RE: SPEC.	7	STOREFRONT W/ IG2 INSULATED SPANDREL GLAZING. RE: SPEC
3	DOOR. RE: DOOR SCHEDULE	8	CURTAIN WALL SYSTEM W/ IG1 THERMAL BREAK GLAZING. U VALUE = .38 RE: SPEC
4	OUTSWING EMERGENCY ESCAPE & EGRESS FIBERGLASS CASSETMENT WINDOW W/ IG1 GLAZING. VERIFY DIRECTION OF SWING. U VALUE = .28 RE: SPEC.	9	H.M. FRAME -PT. W/ IG1 THERMAL BREAK GLAZING. RE: SPEC.
5	PRE-FIN. BREAK MTL. TO MATCH STOREFRONT OR MTL. -PT. TO MATCH H.M. FRAME. ALIGN ALL BREAK MTL. JNTS. W/ MULLIONS, TYP.	10	FULLY FROSTED. RE: SPEC.
		11	PROVIDE DUAL SHADES. RE: SPEC.

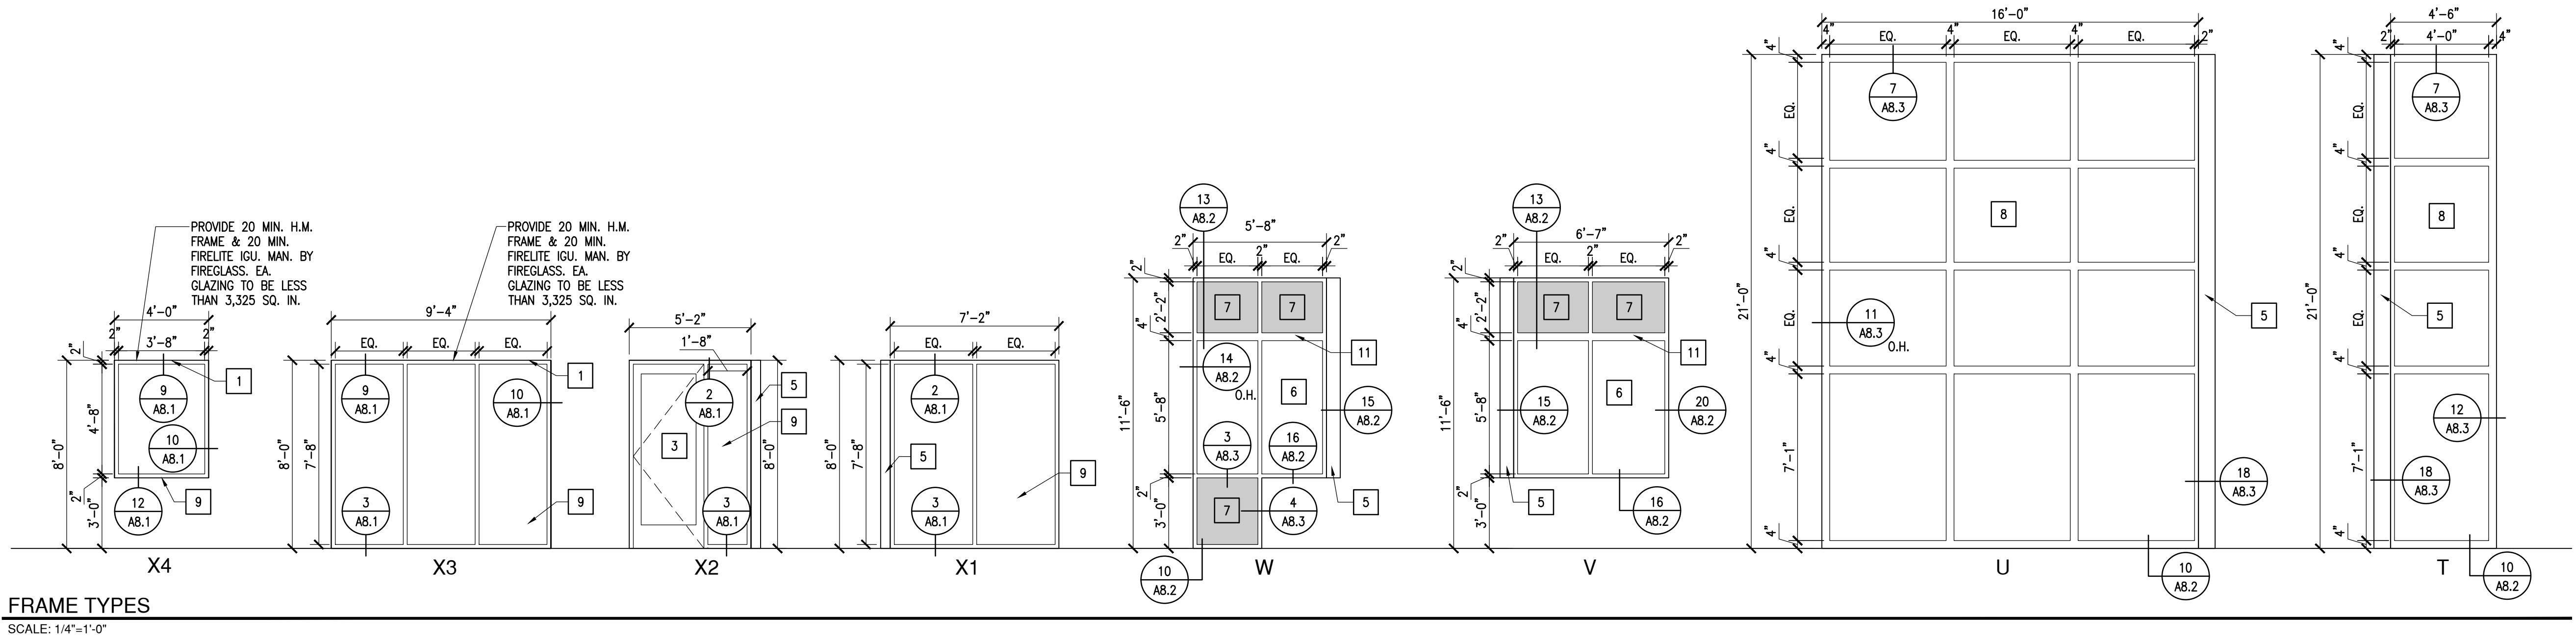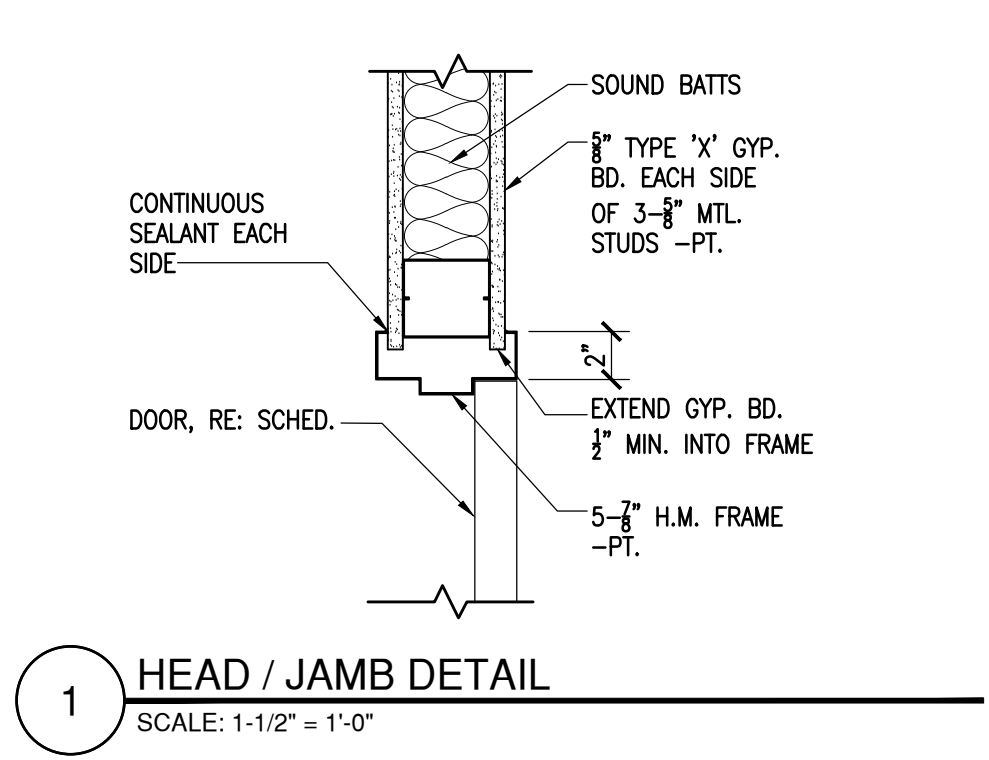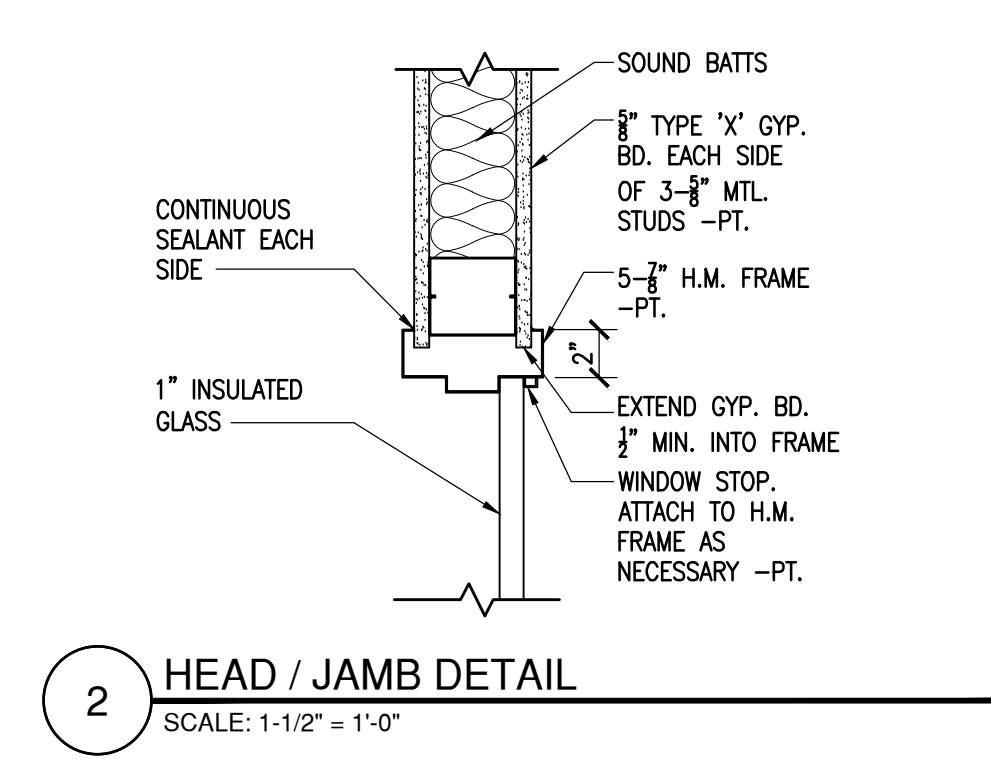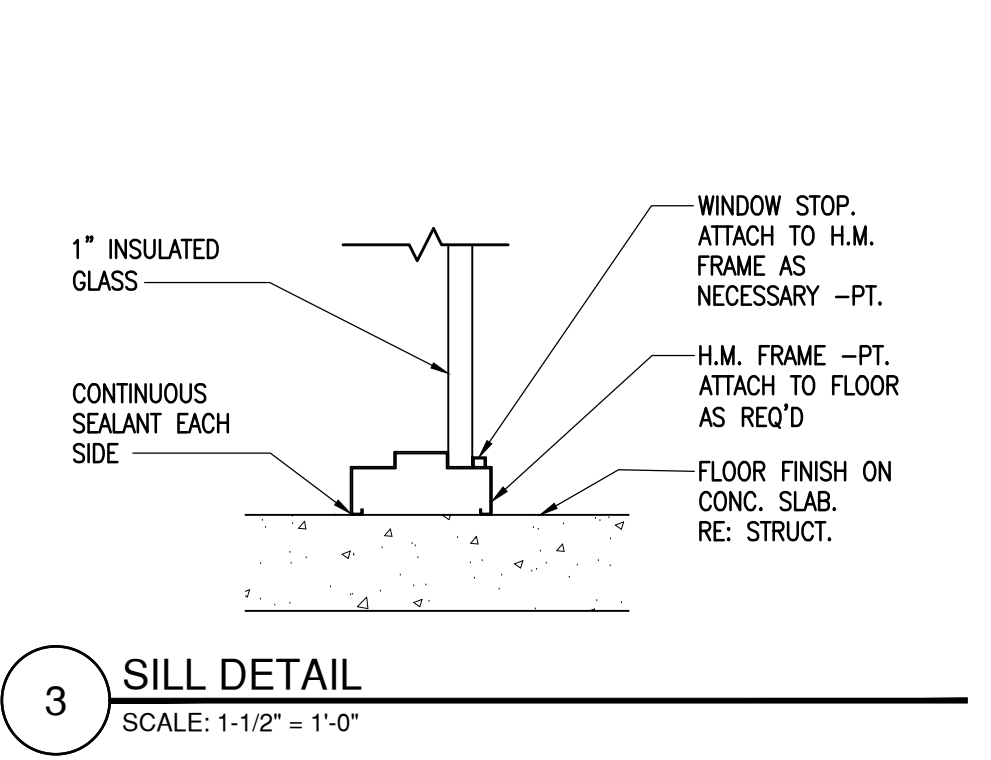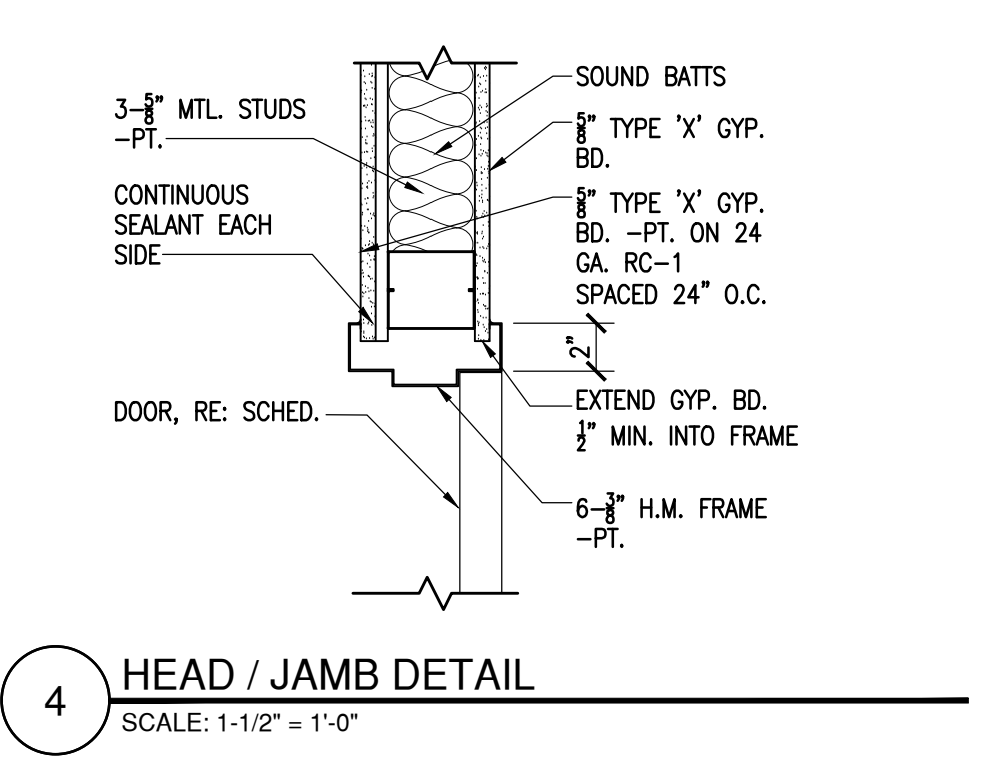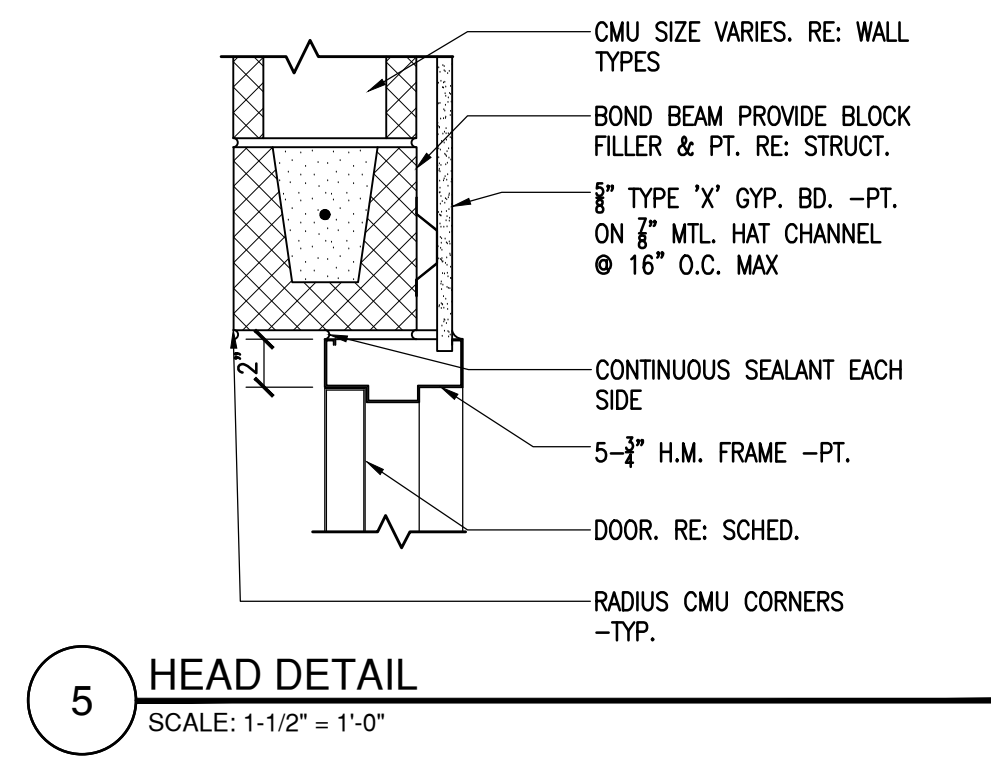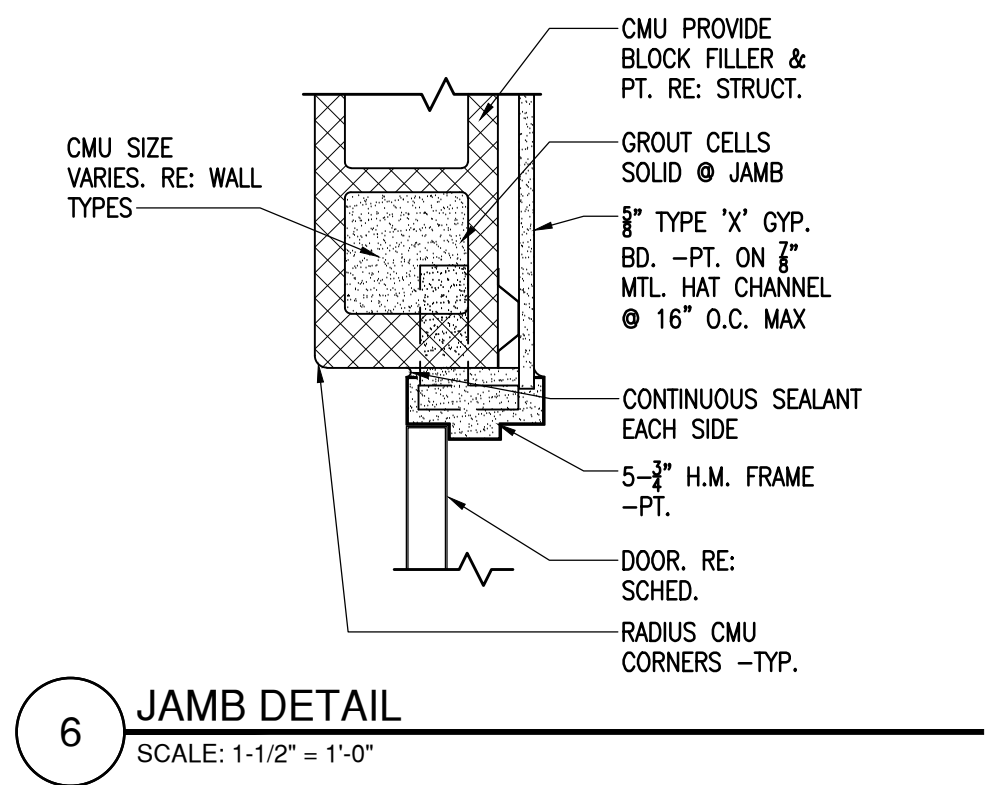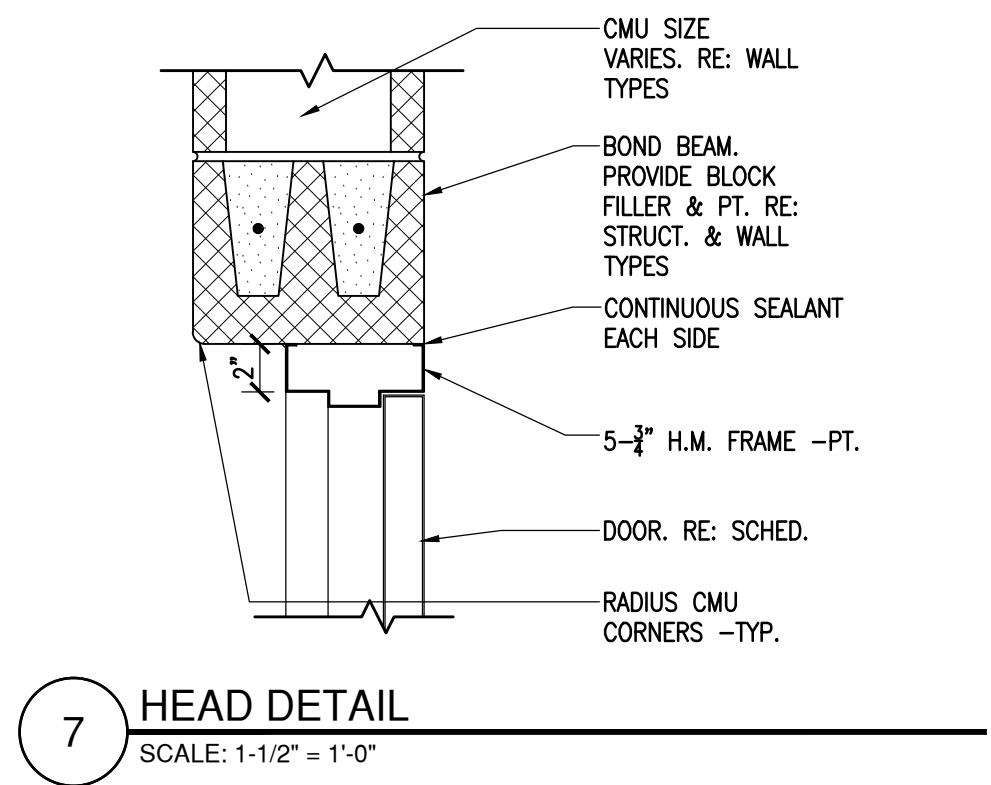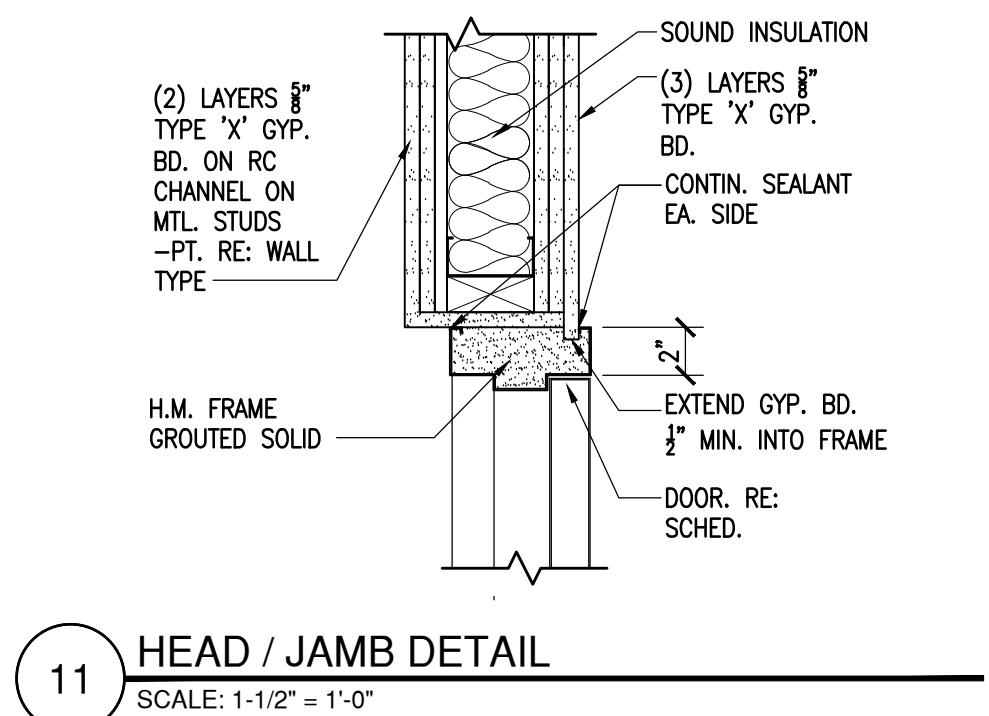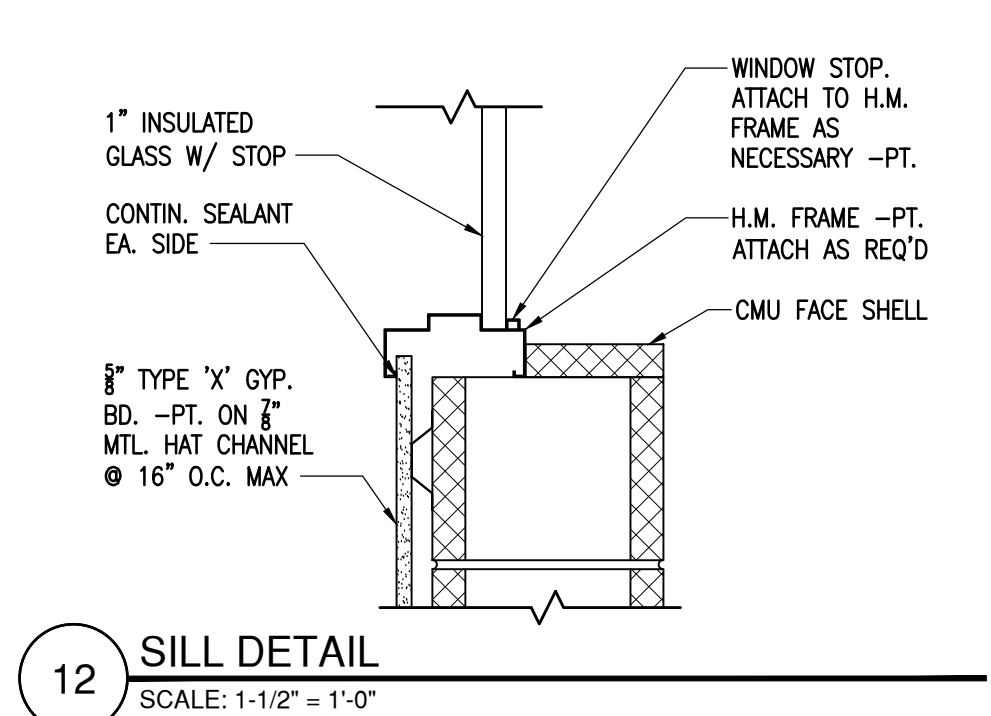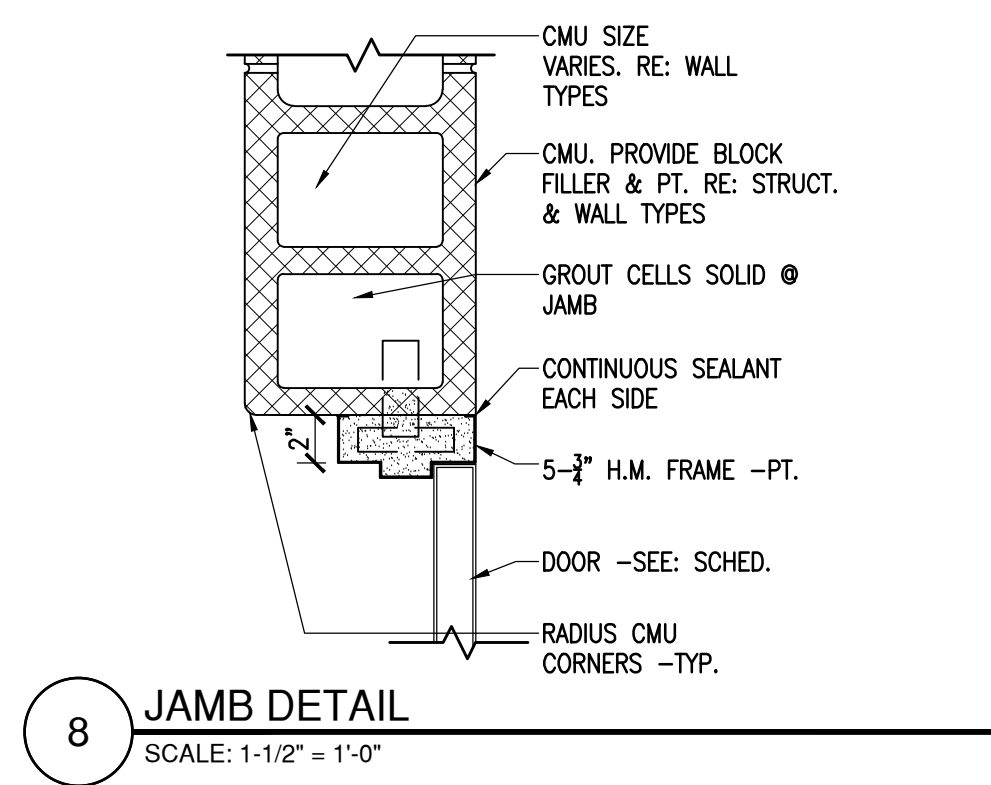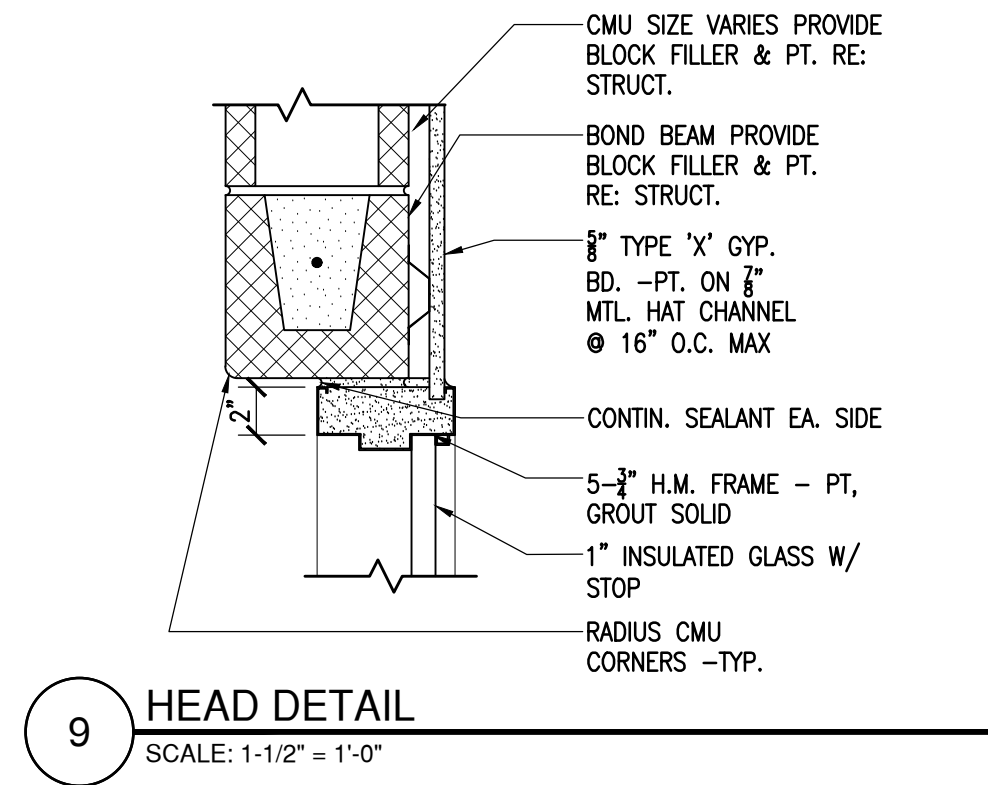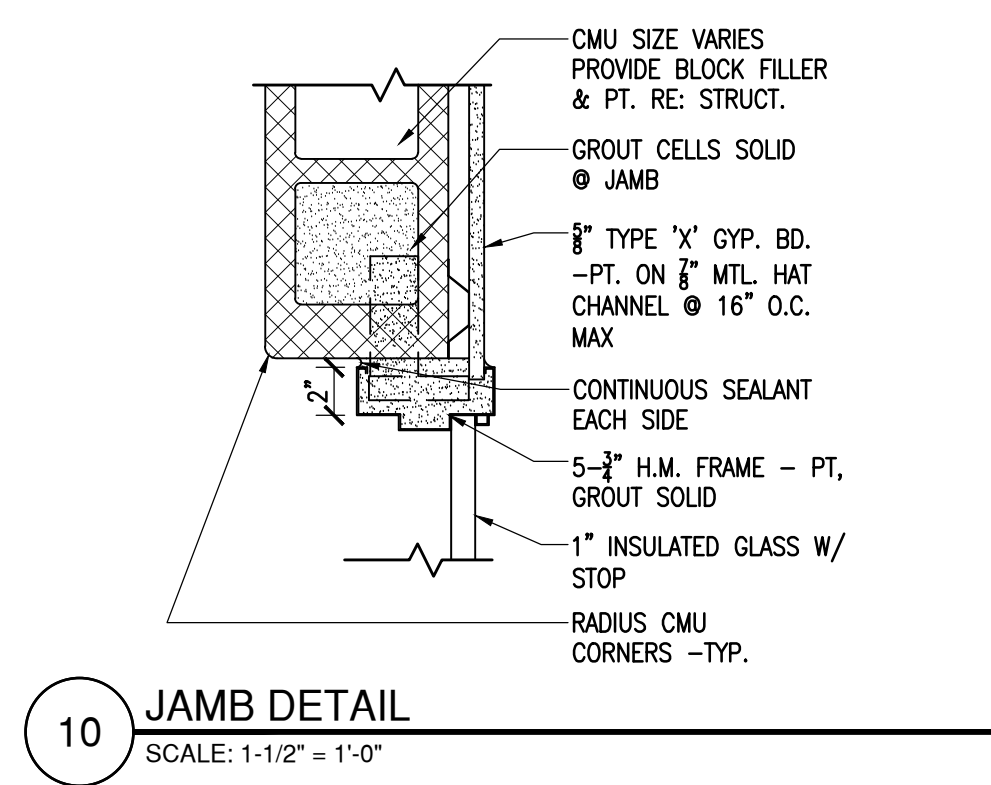


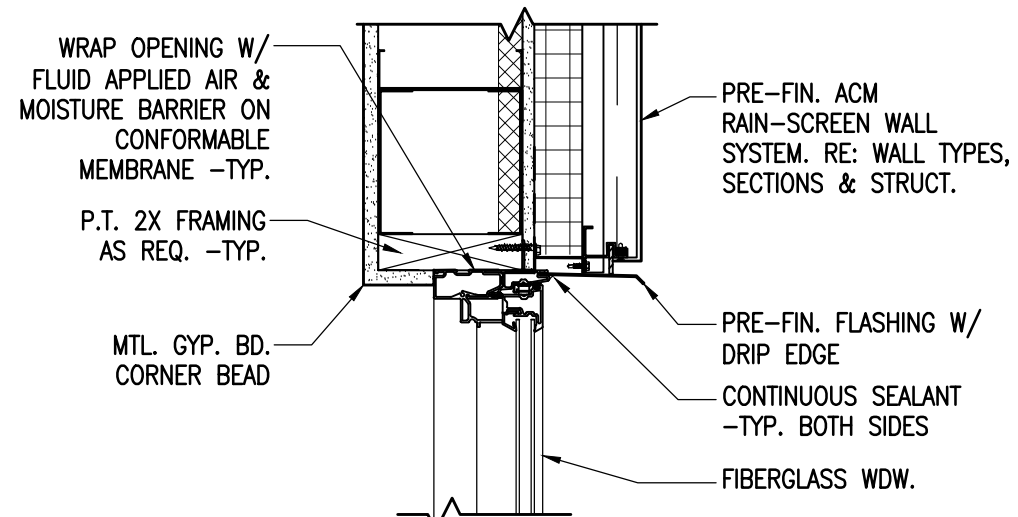


19 HEAD DETAIL
SCALE: 1-1/2" = 1'-0"

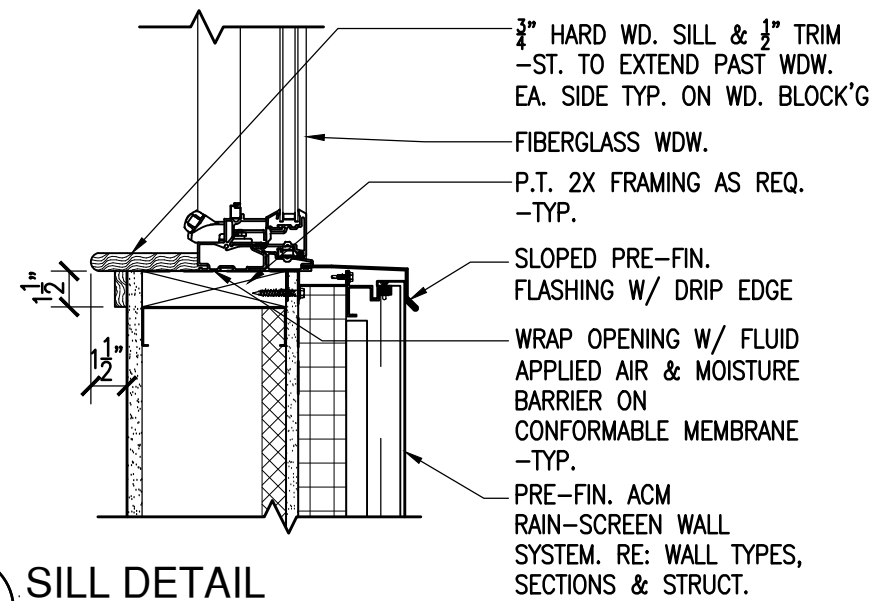


18 SILL DETAIL
SCALE: 1-1/2" = 1'-0"

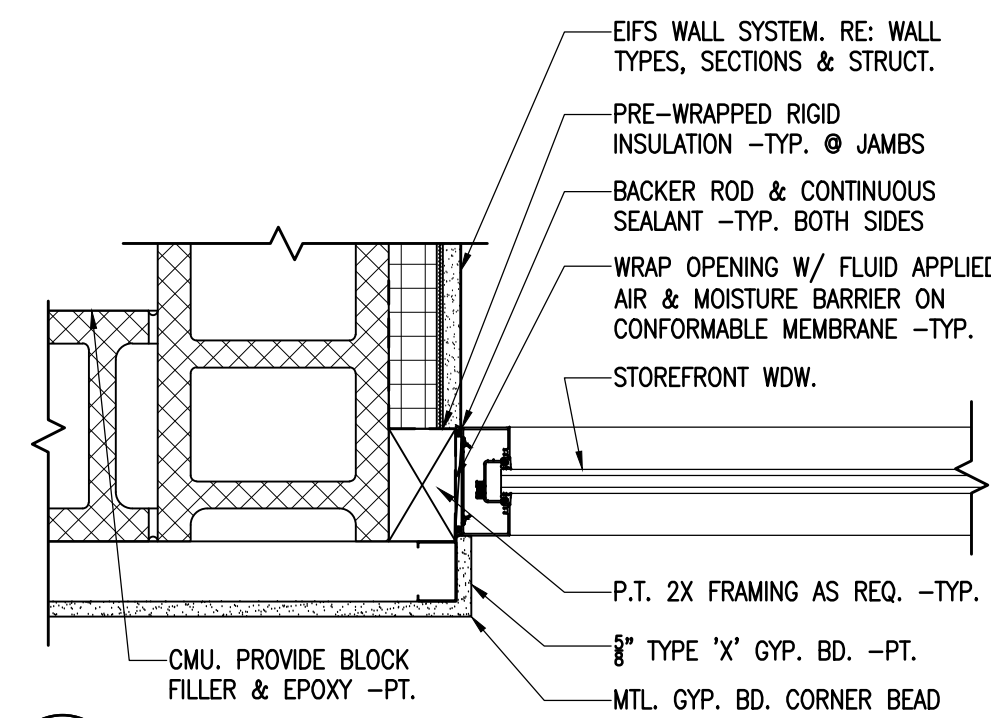


20 JAMB DETAIL
SCALE: 1-1/2" = 1'-0"

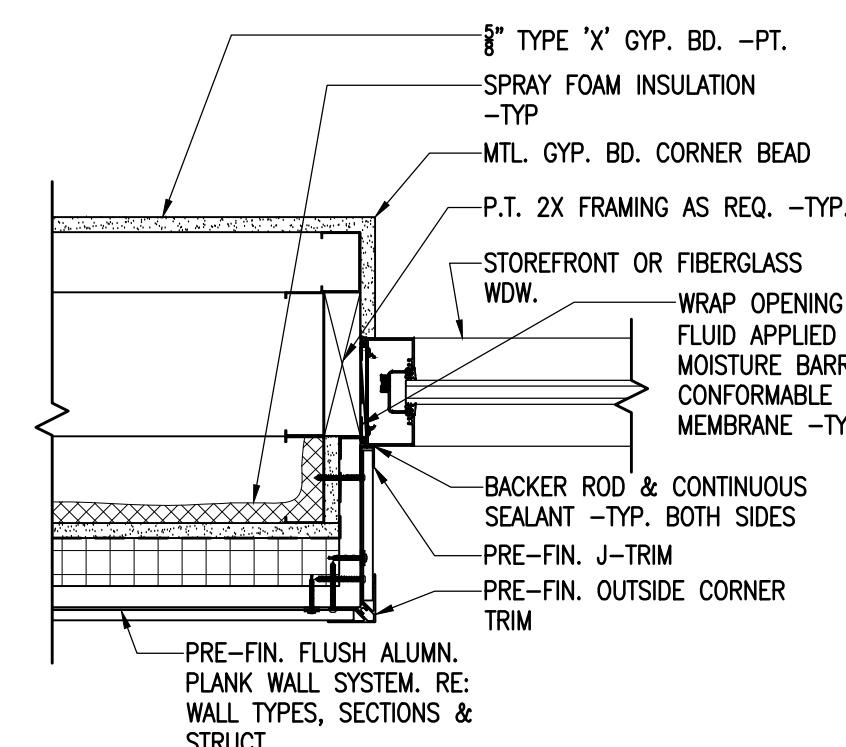


17 JAMB DETAIL
SCALE: 1-1/2" = 1'-0"

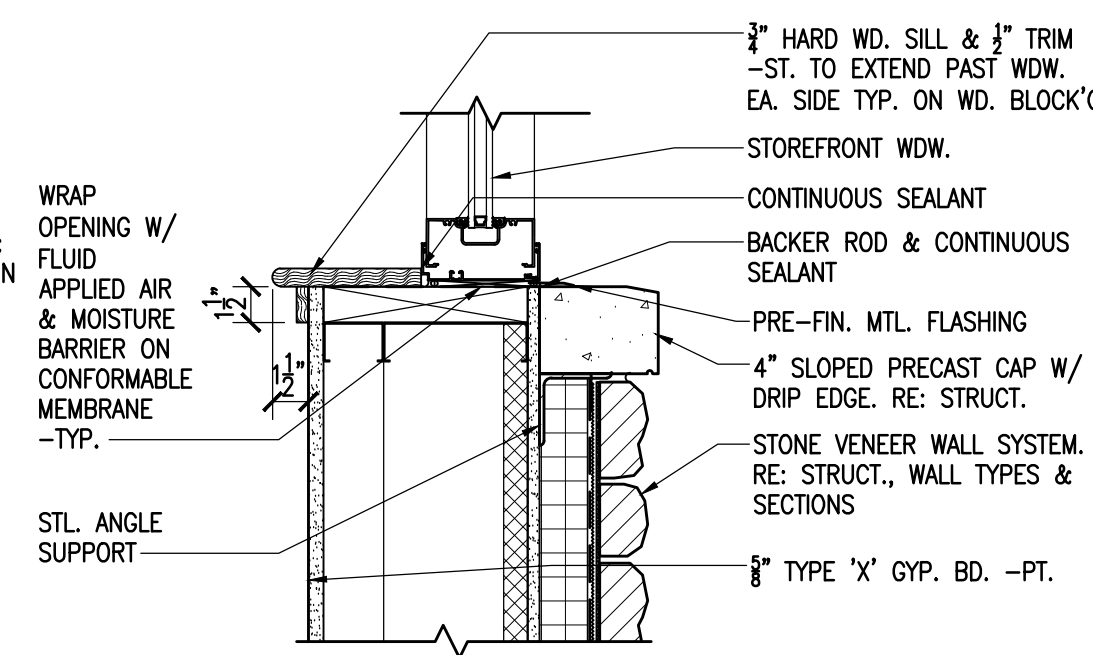


16 SILL DETAIL
SCALE: 1-1/2" = 1'-0"

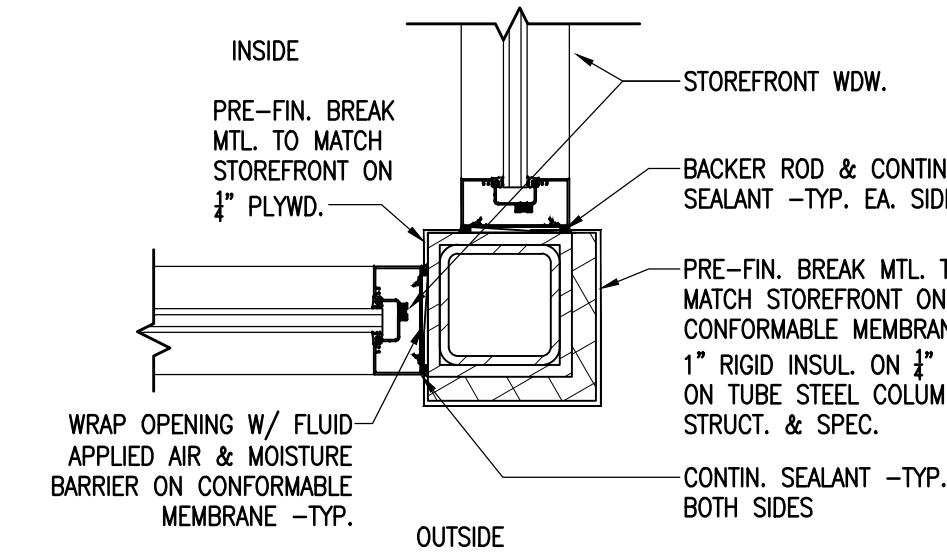


15 JAMB DETAIL
SCALE: 1-1/2" = 1'-0"

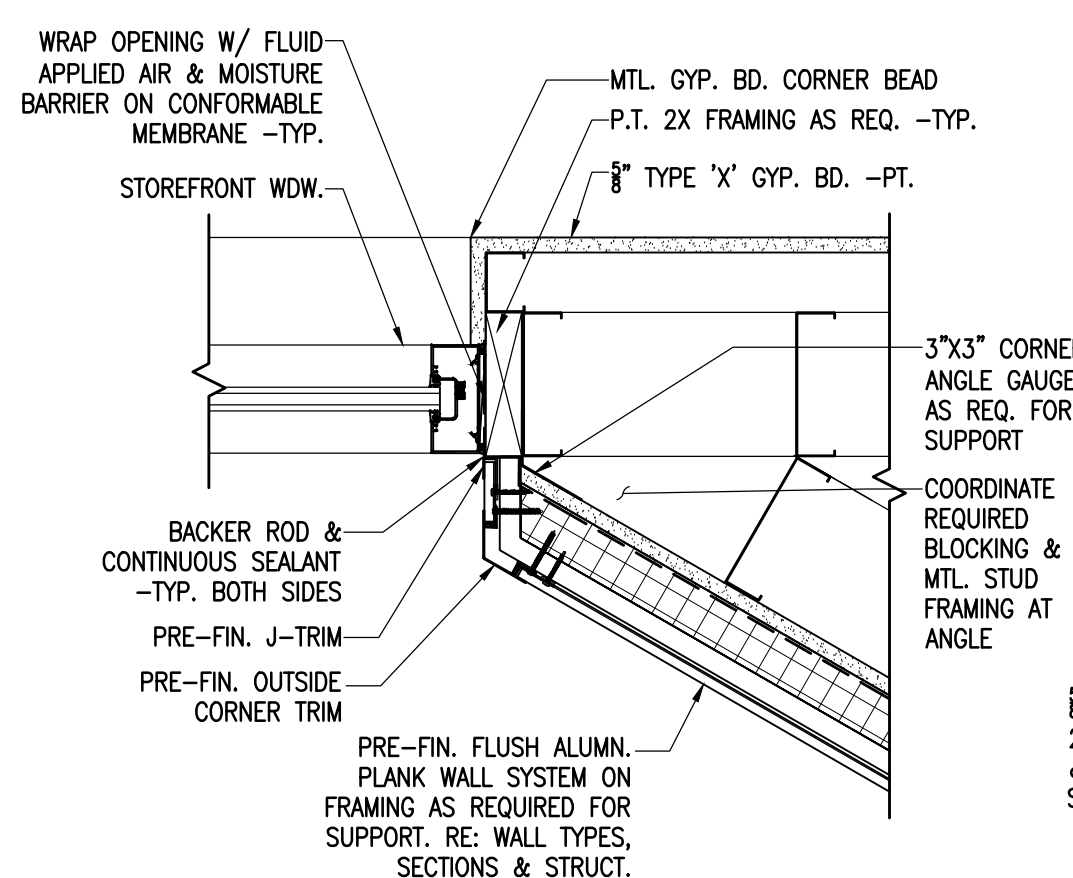


14 JAMB DETAIL
SCALE: 1-1/2" = 1'-0"

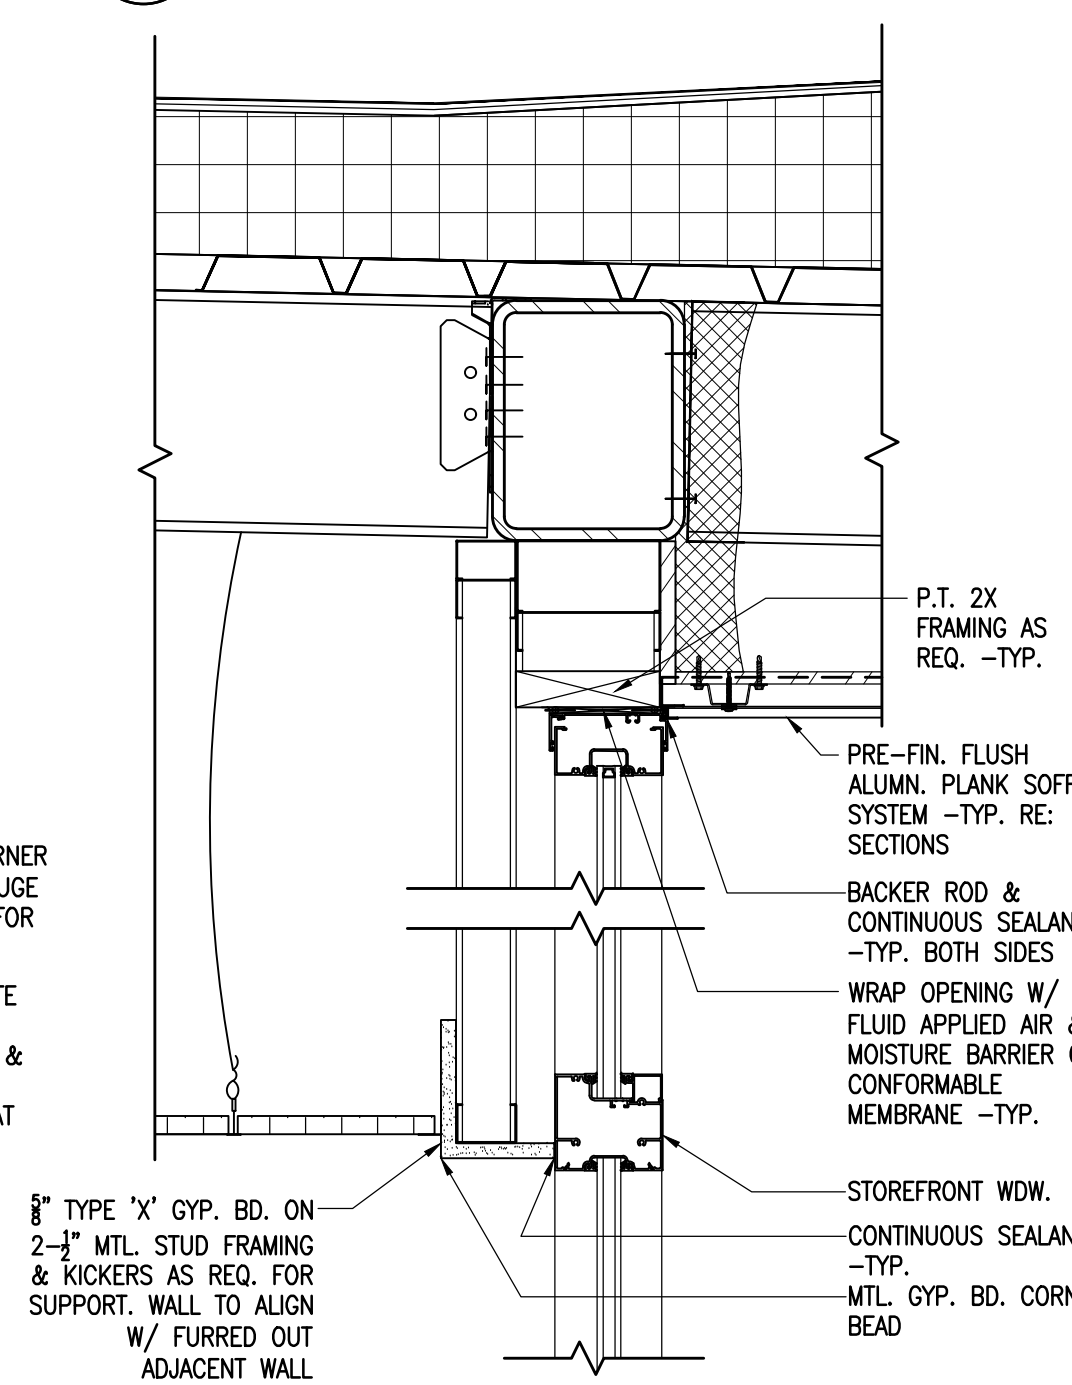


13 HEAD DETAIL
SCALE: 1-1/2" = 1'-0"

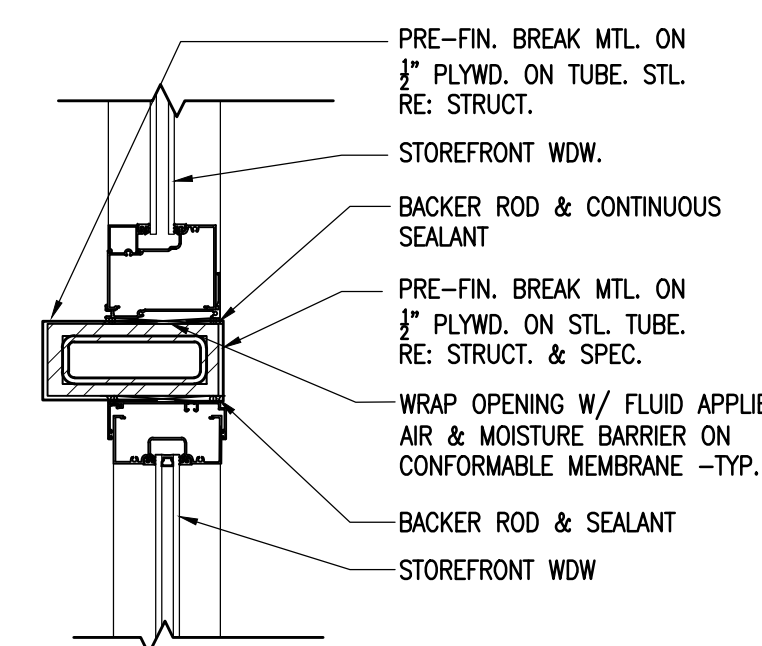


12 HEAD/SILL DETAIL
SCALE: 1-1/2" = 1'-0"

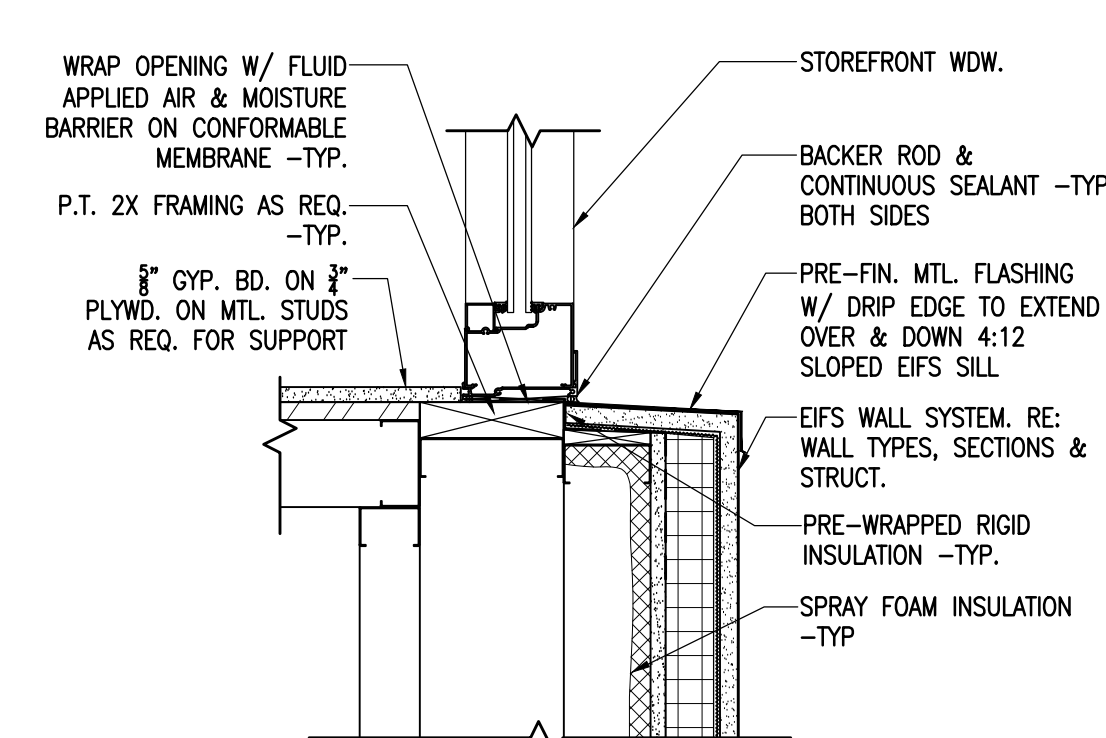


11 SILL DETAIL
SCALE: 1-1/2" = 1'-0"

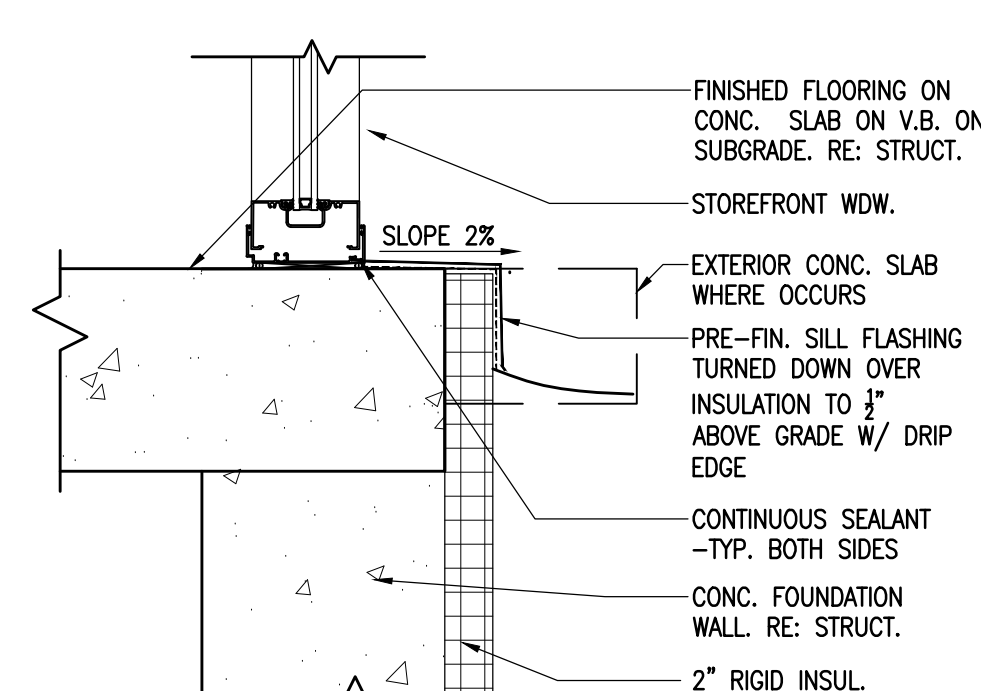


10 SILL DETAIL
SCALE: 1-1/2" = 1'-0"

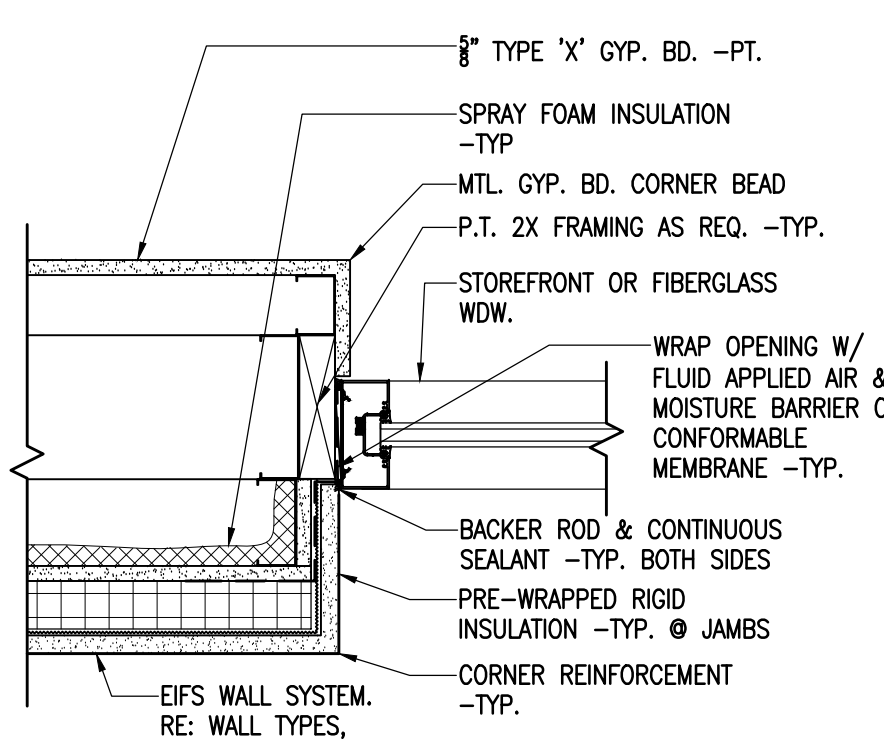


9 JAMB DETAIL
SCALE: 1-1/2" = 1'-0"

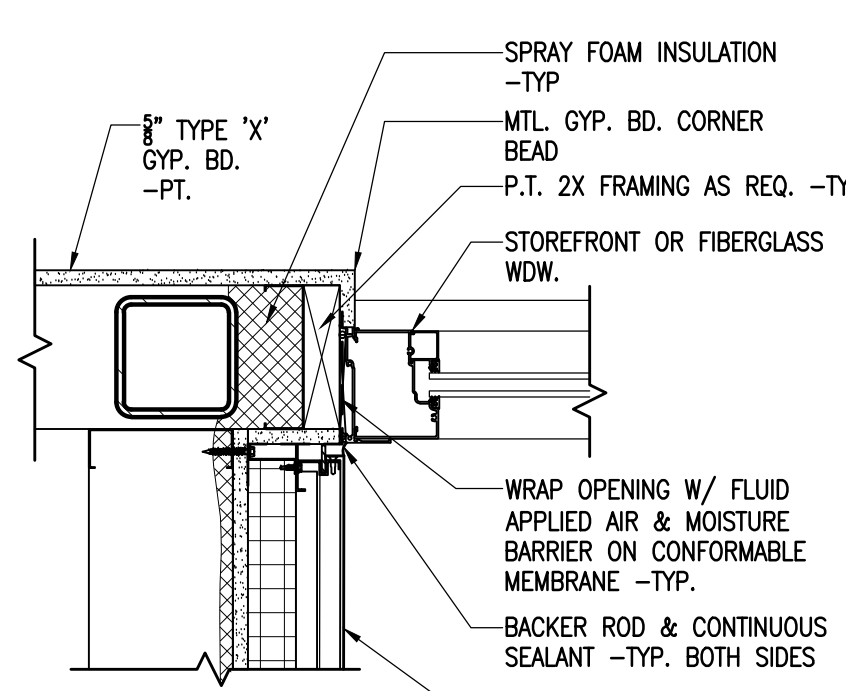


8 JAMB DETAIL
SCALE: 1-1/2" = 1'-0"

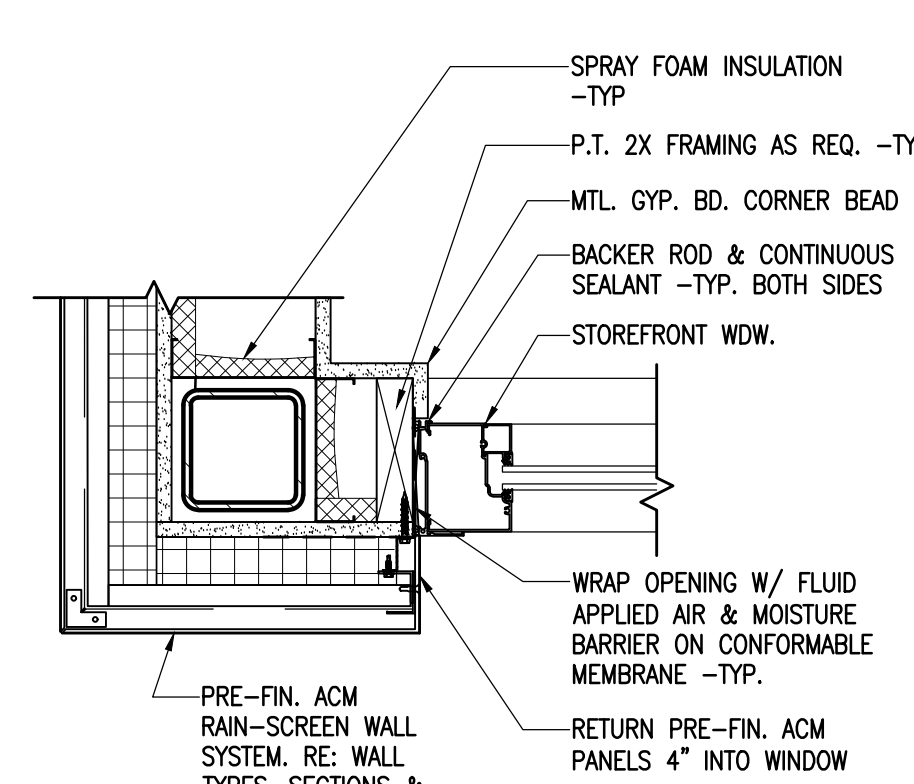


7 JAMB DETAIL
SCALE: 1-1/2" = 1'-0"

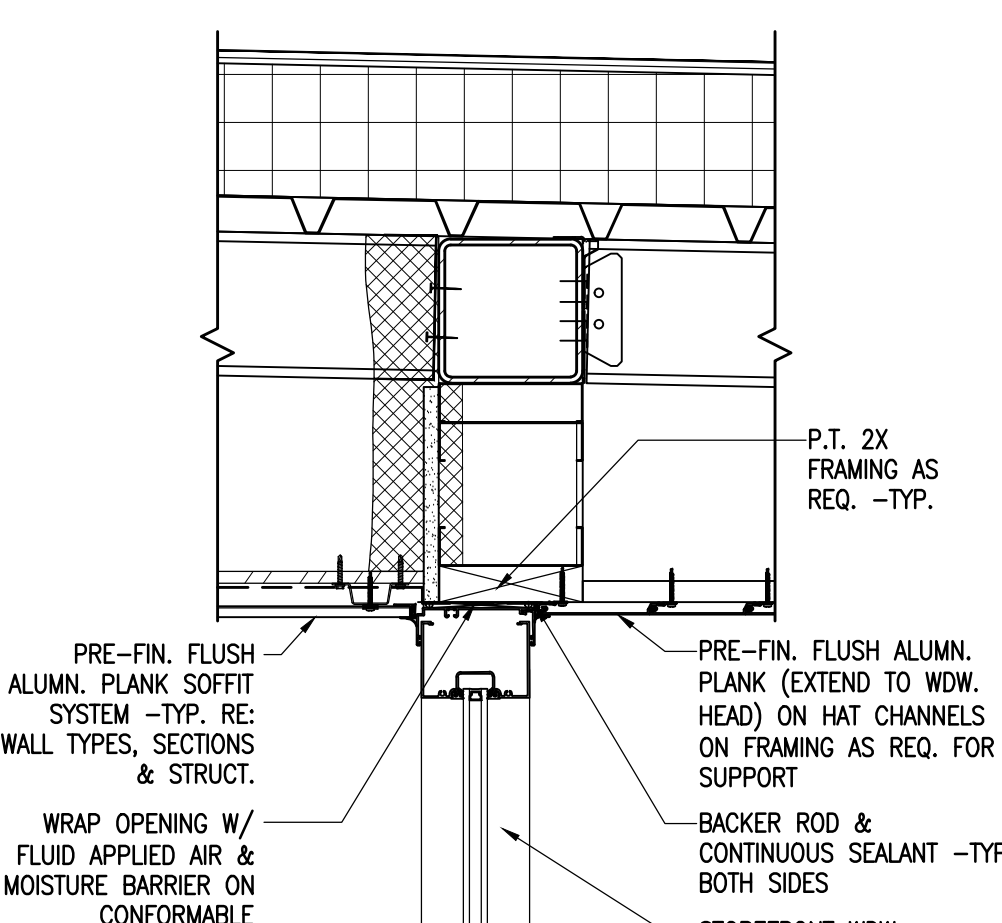


6 HEAD DETAIL
SCALE: 1-1/2" = 1'-0"

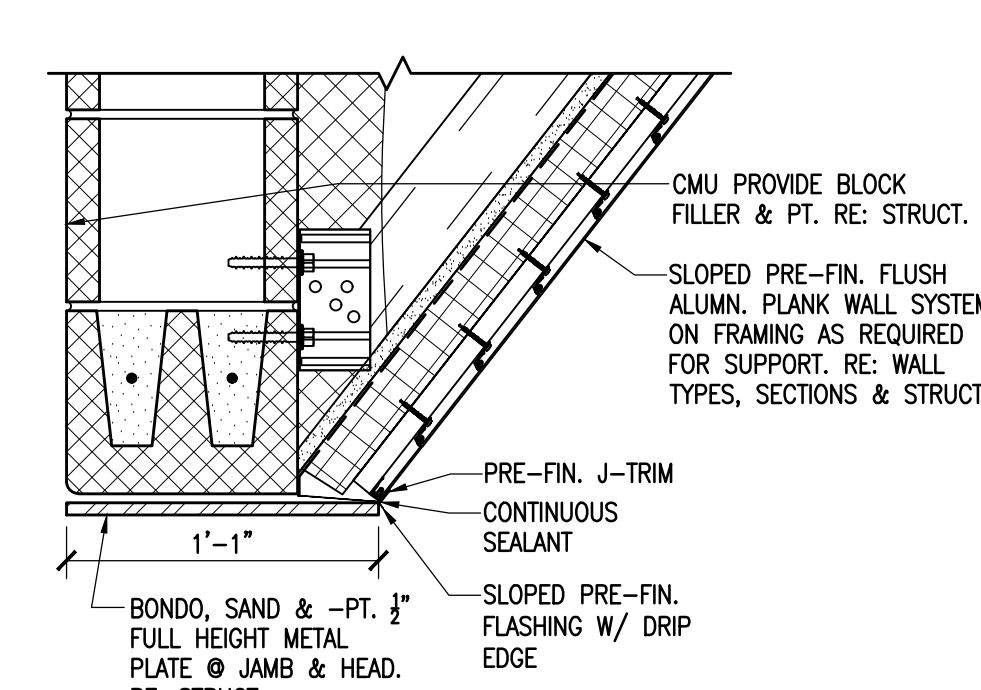


5 HEAD DETAIL
SCALE: 1-1/2" = 1'-0"

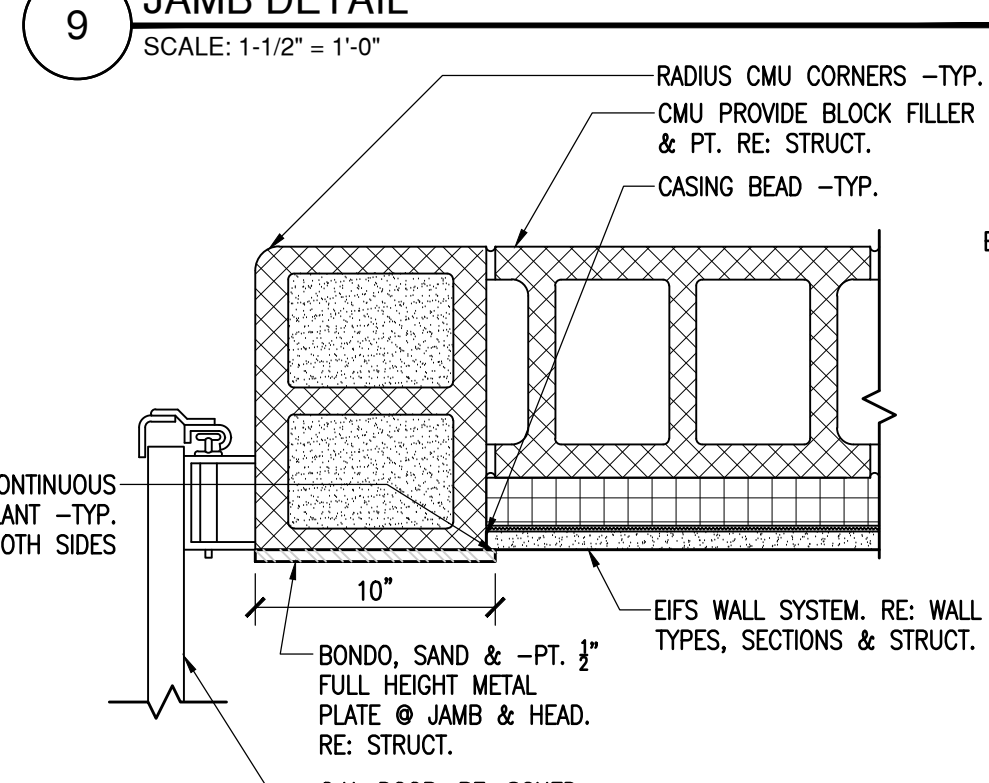


4 JAMB DETAIL
SCALE: 1-1/2" = 1'-0"

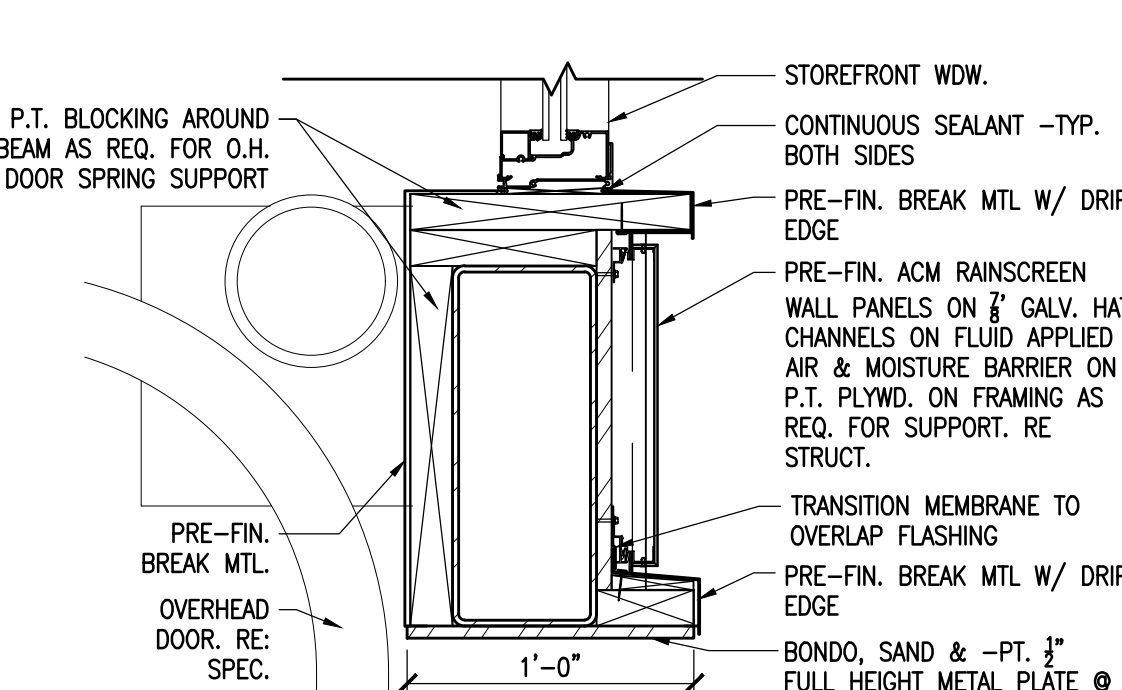

3 HEAD DETAIL
SCALE: 1-1/2" = 1'-0"

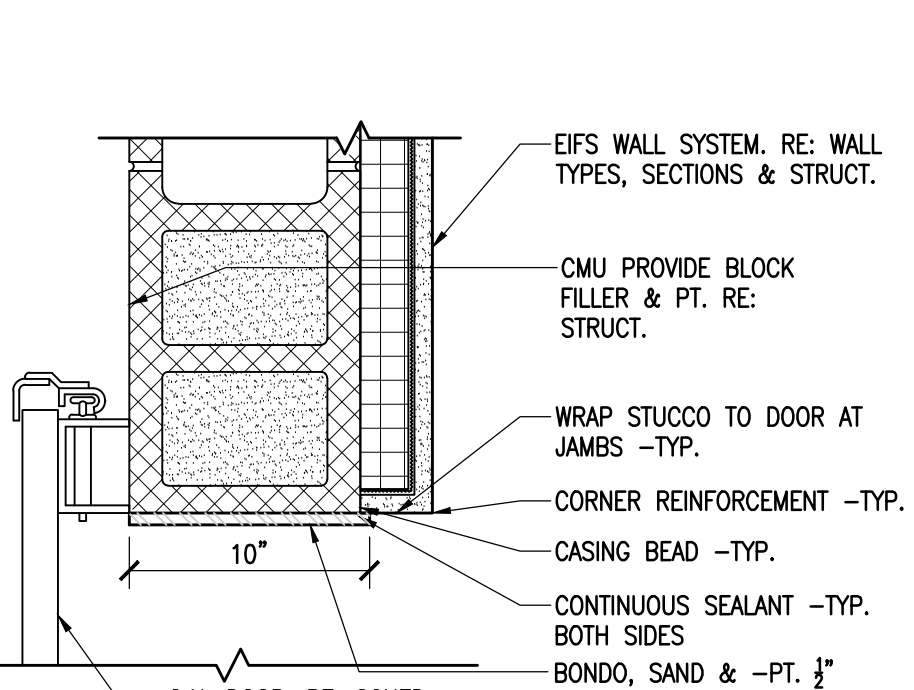





















2 JAMB DETAIL
SCALE: 1-1/2" = 1'-0"

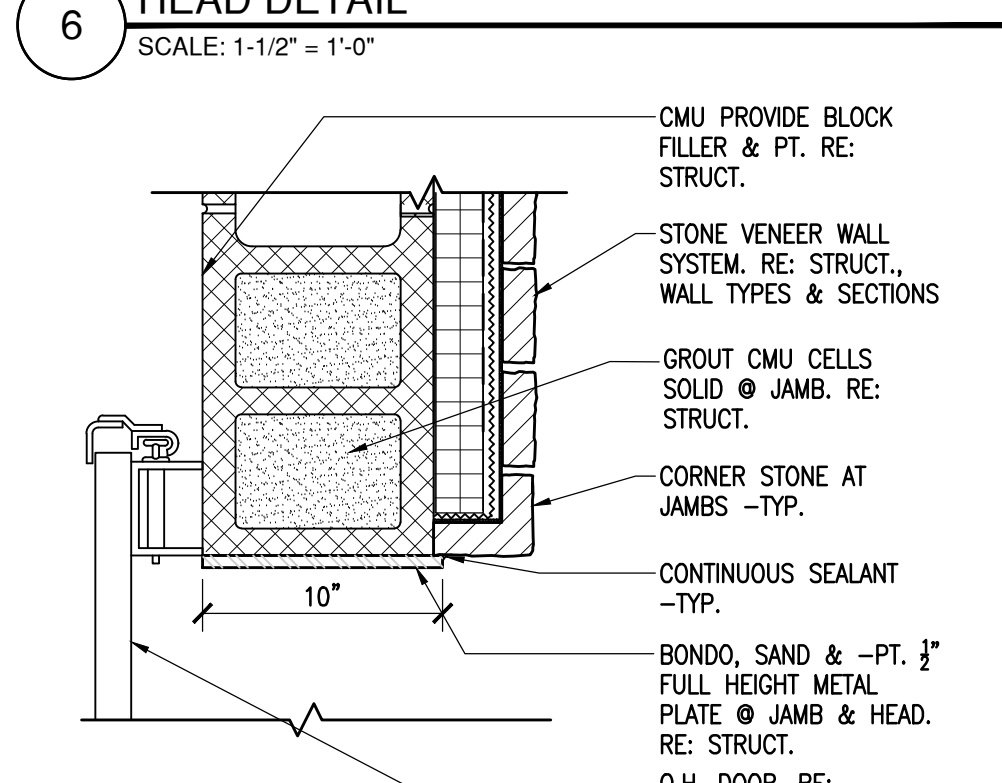

1 JAMB DETAIL
SCALE: 1-1/2" = 1'-0"

REVISION NAME	DATE

ISSUE DATE: 2024.09.27

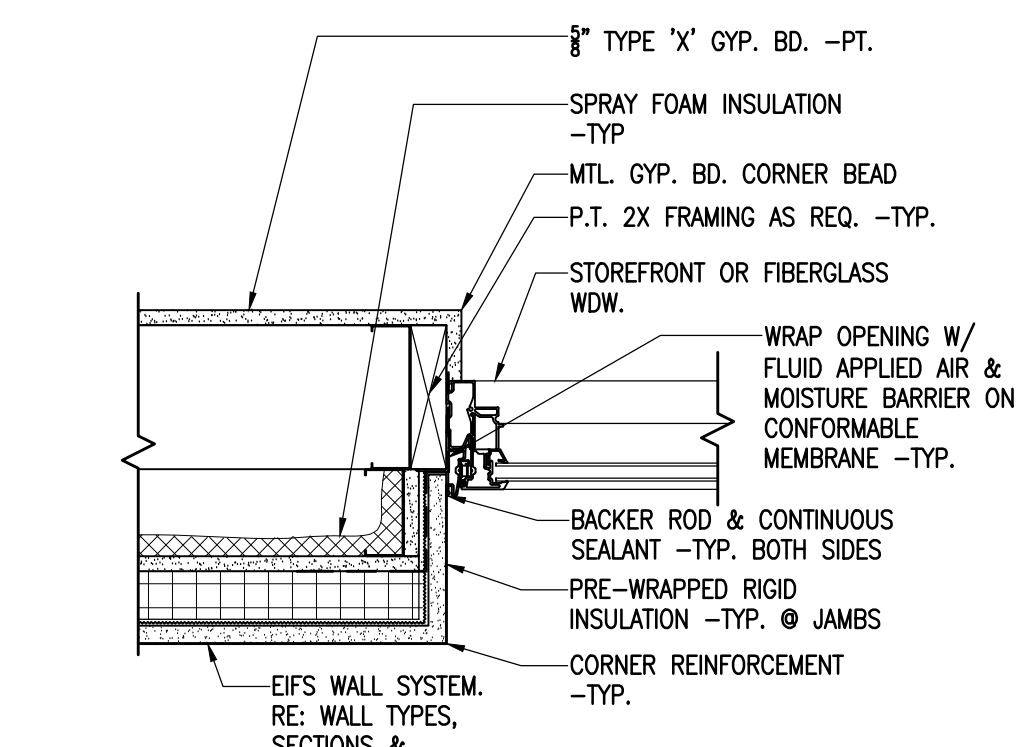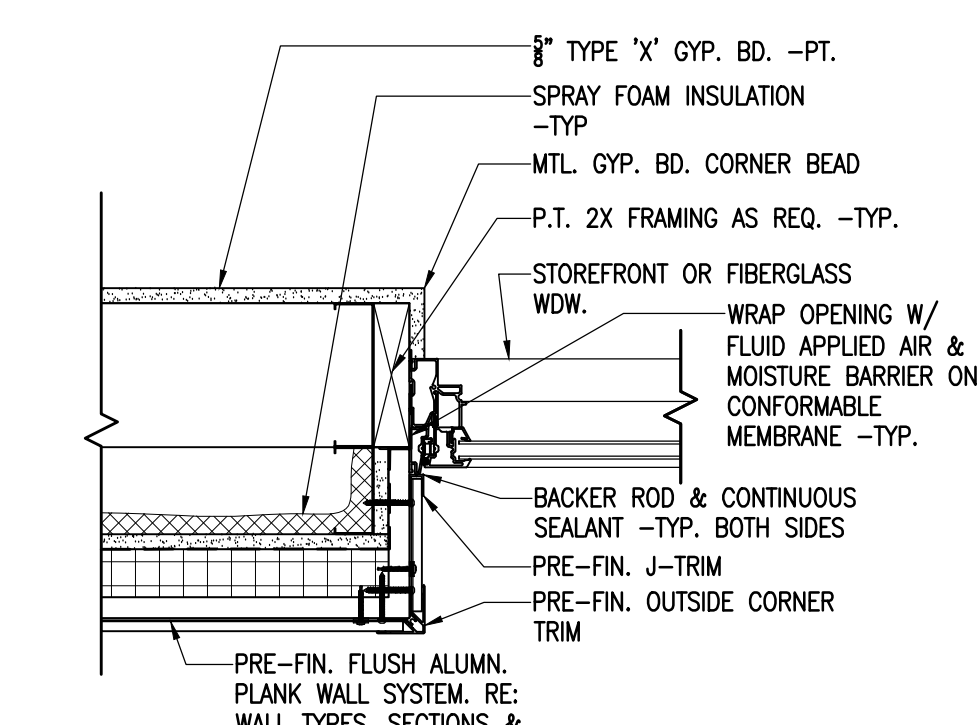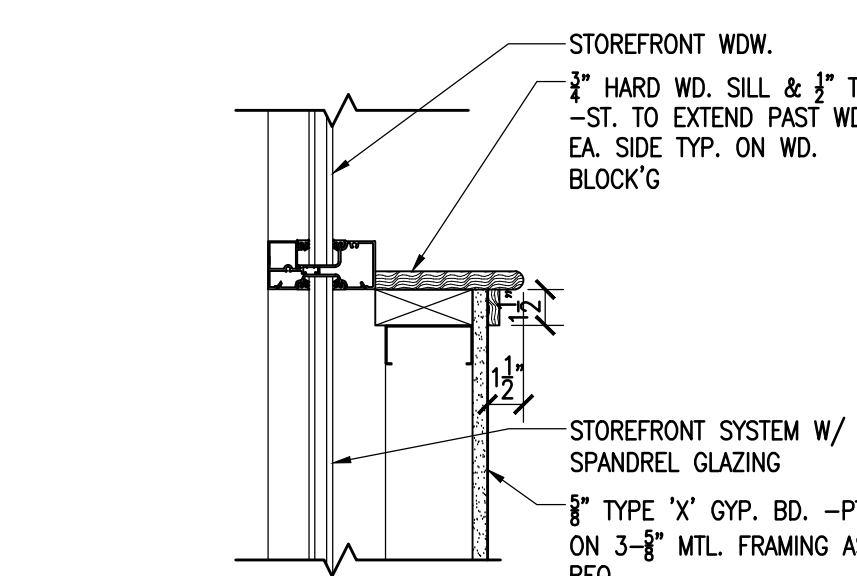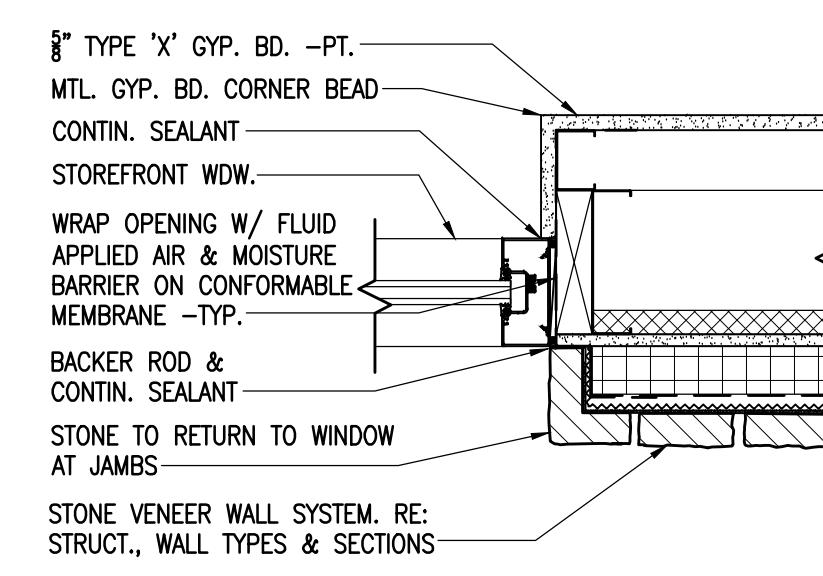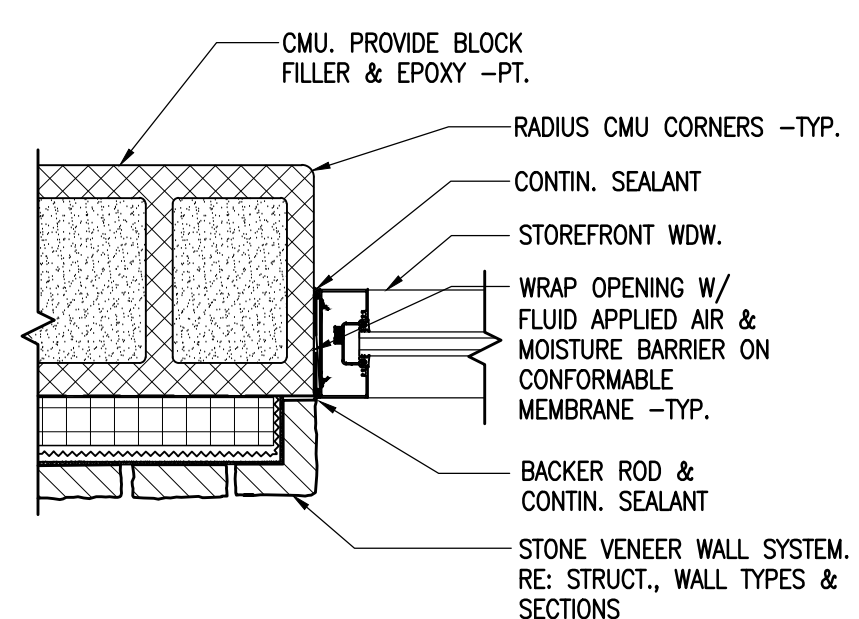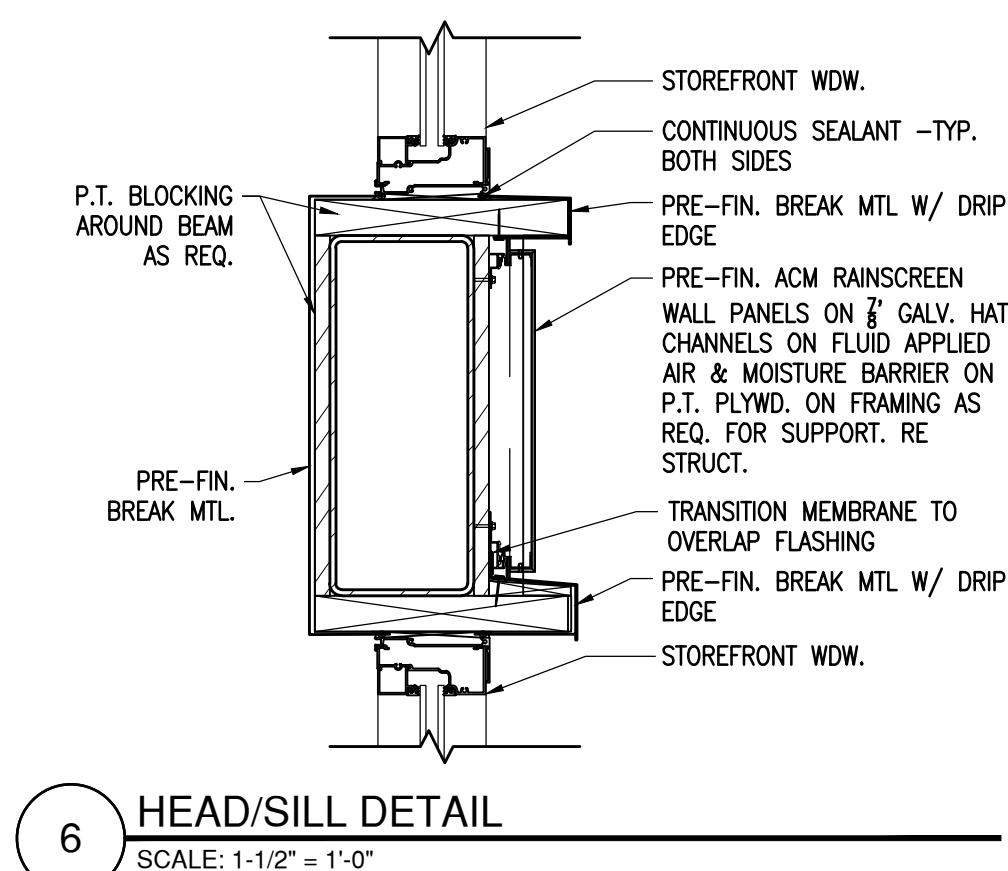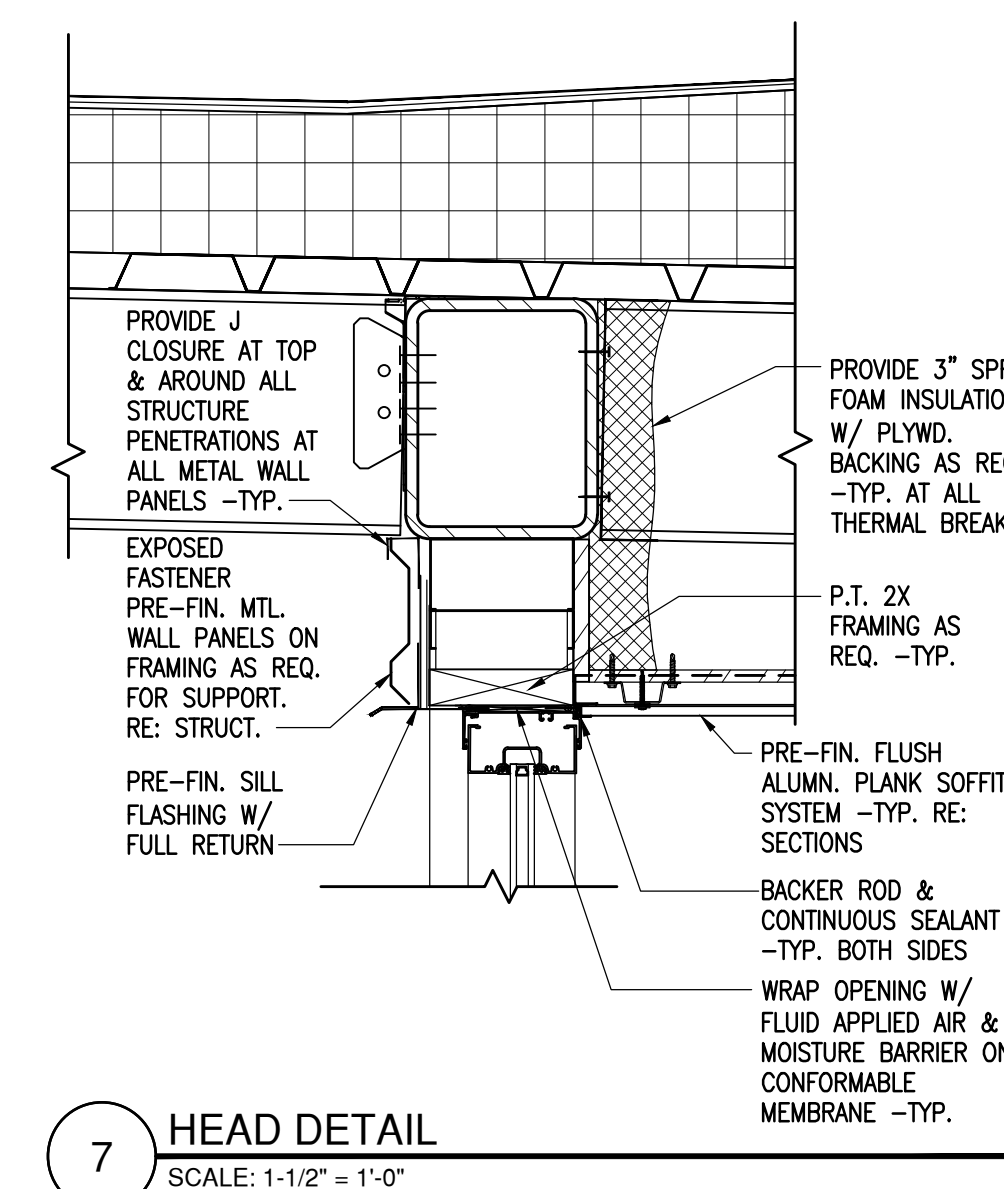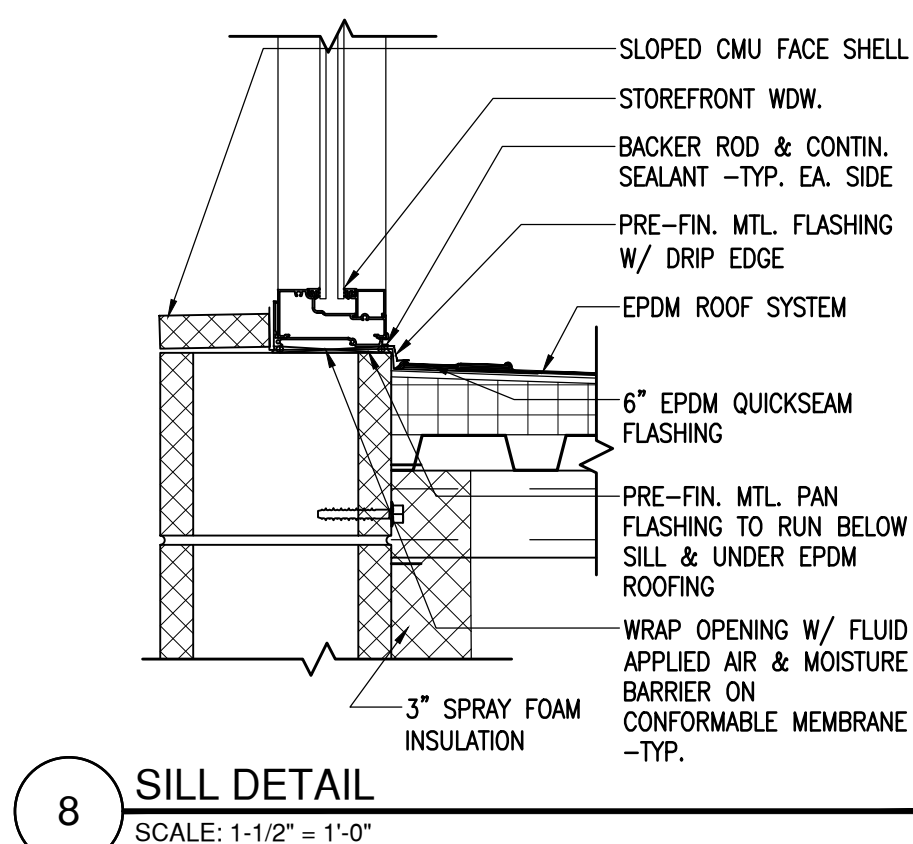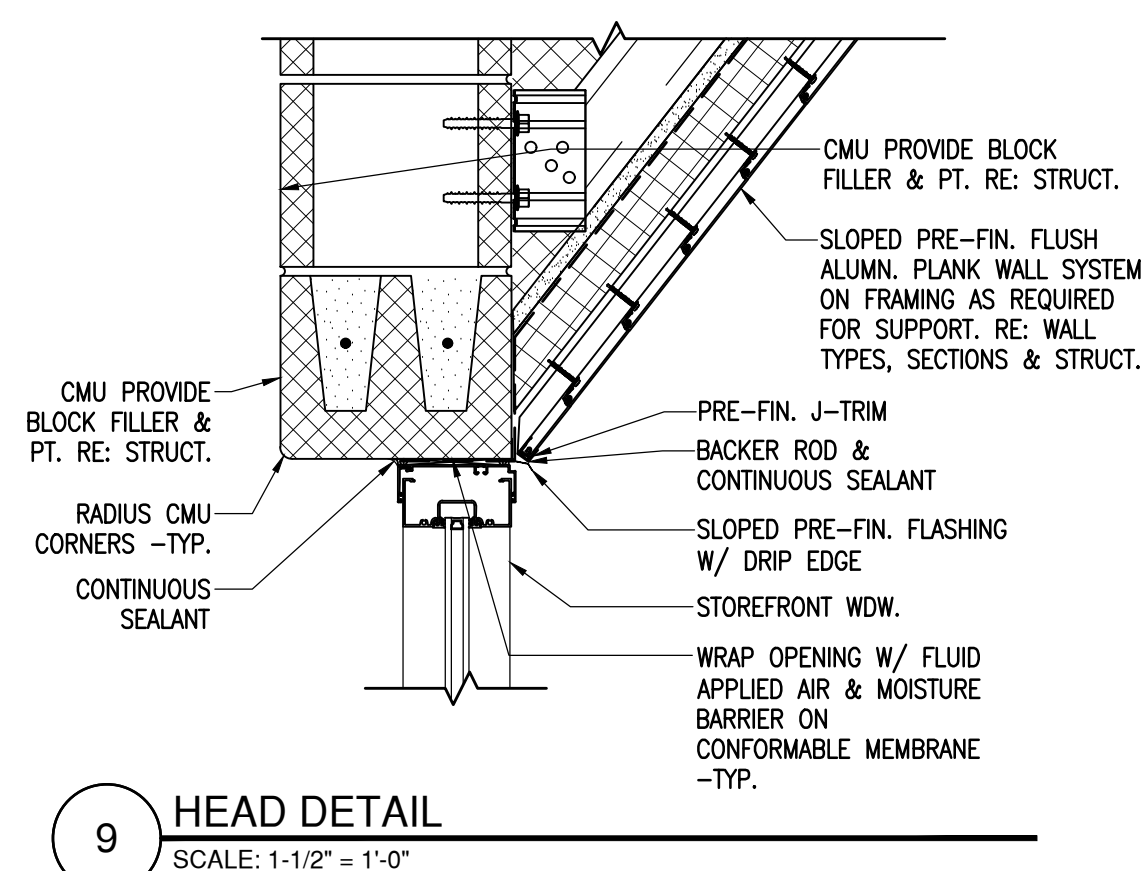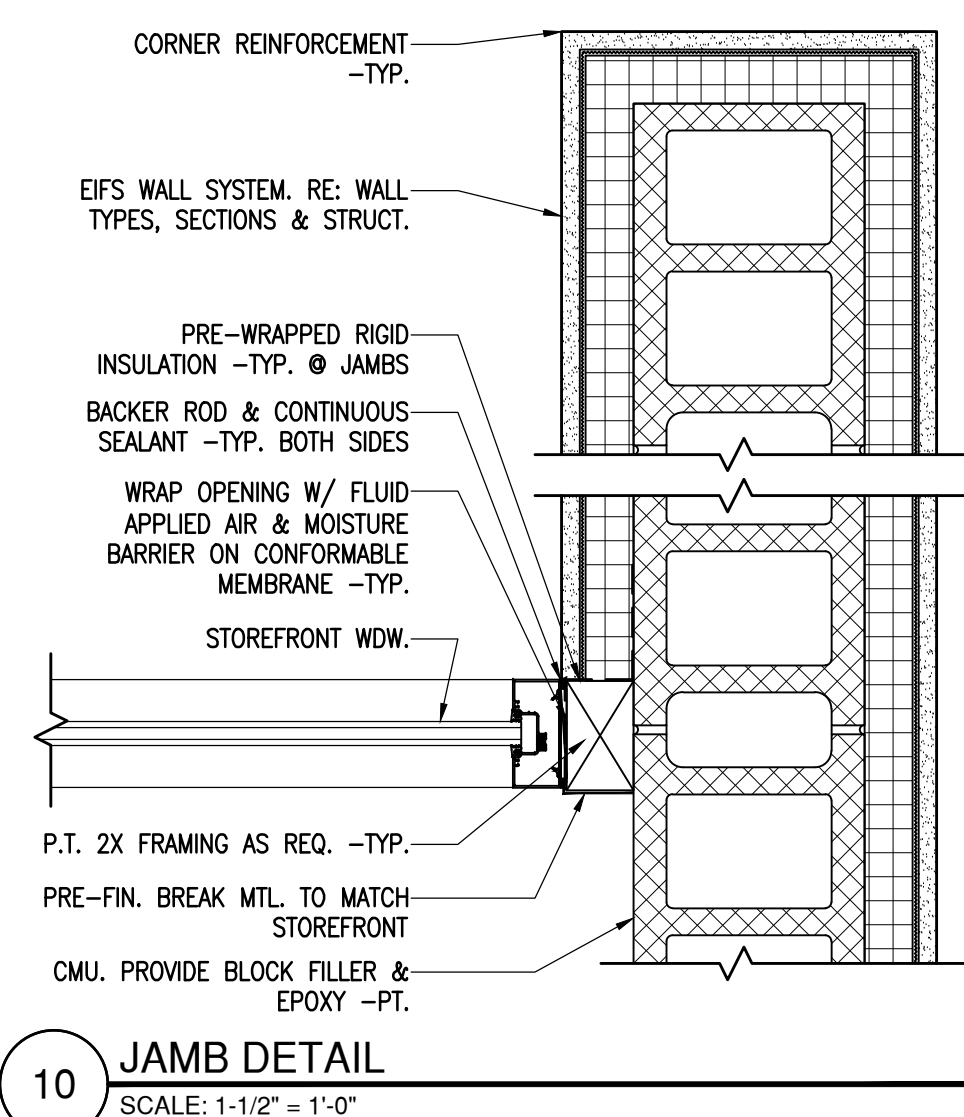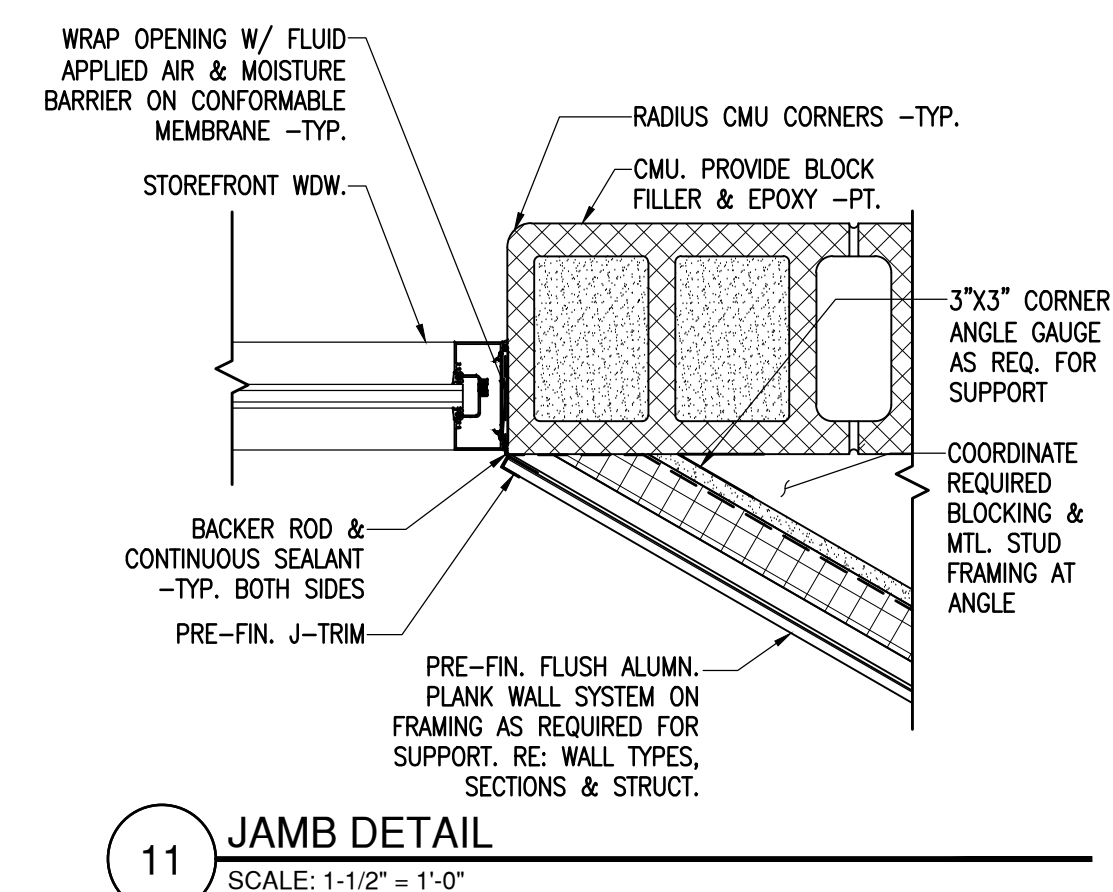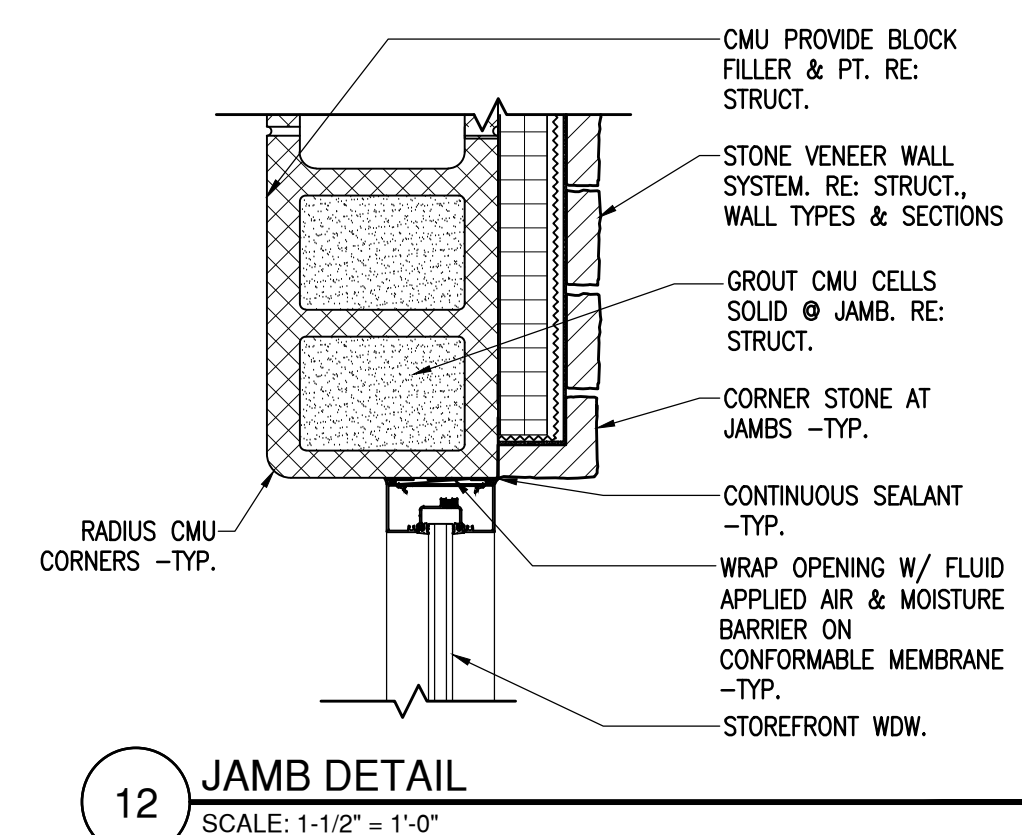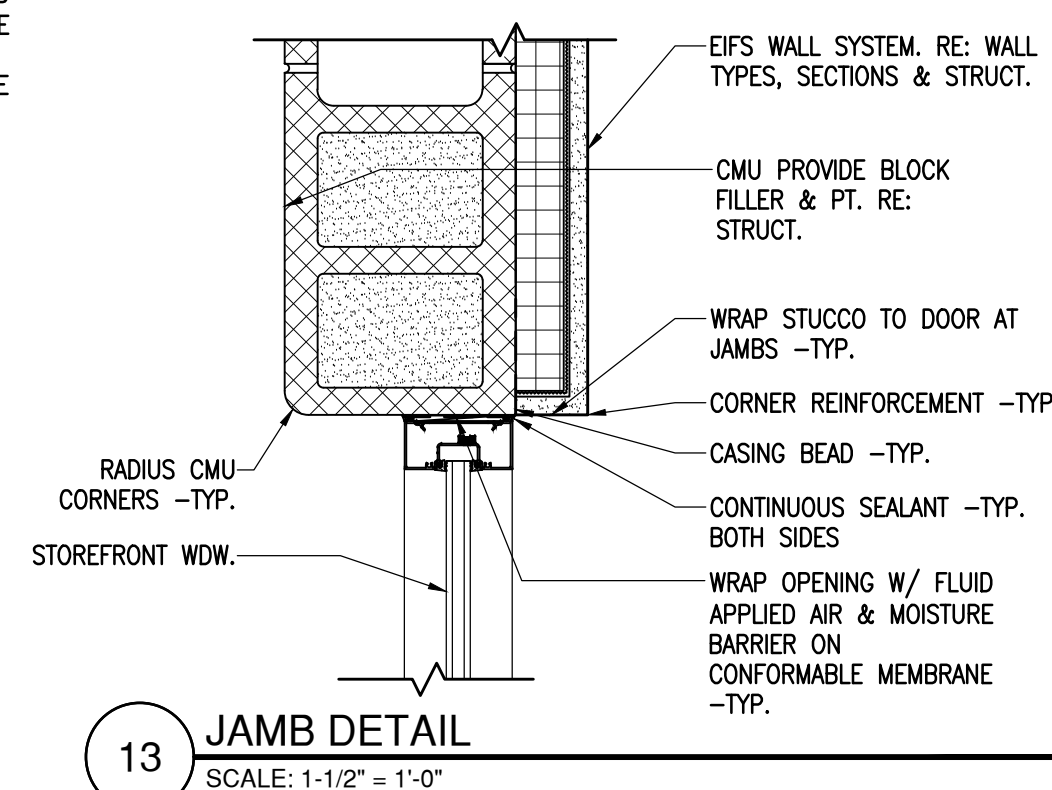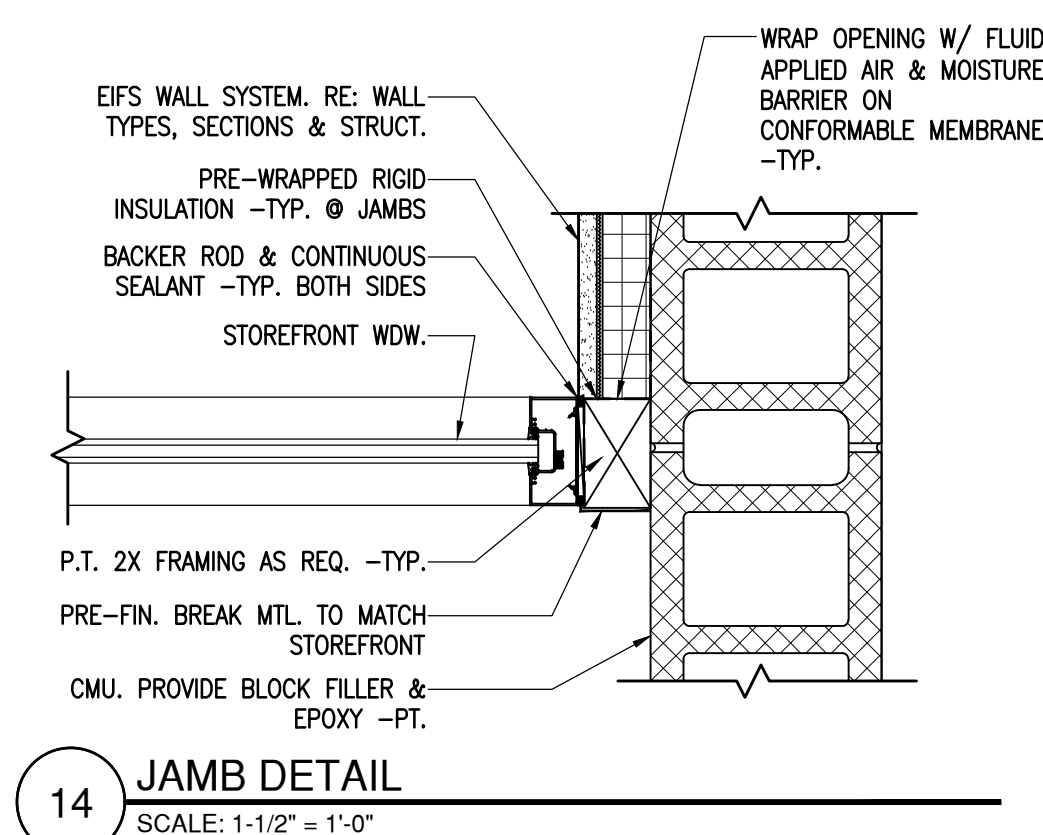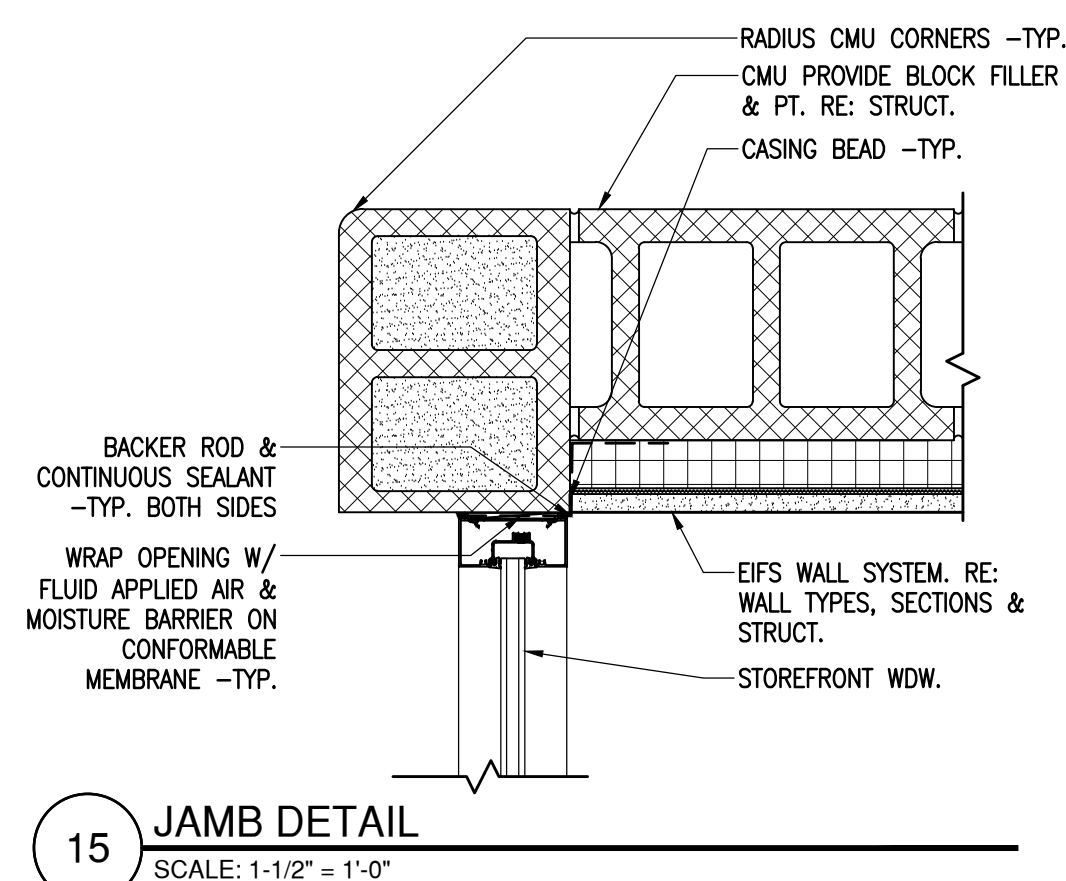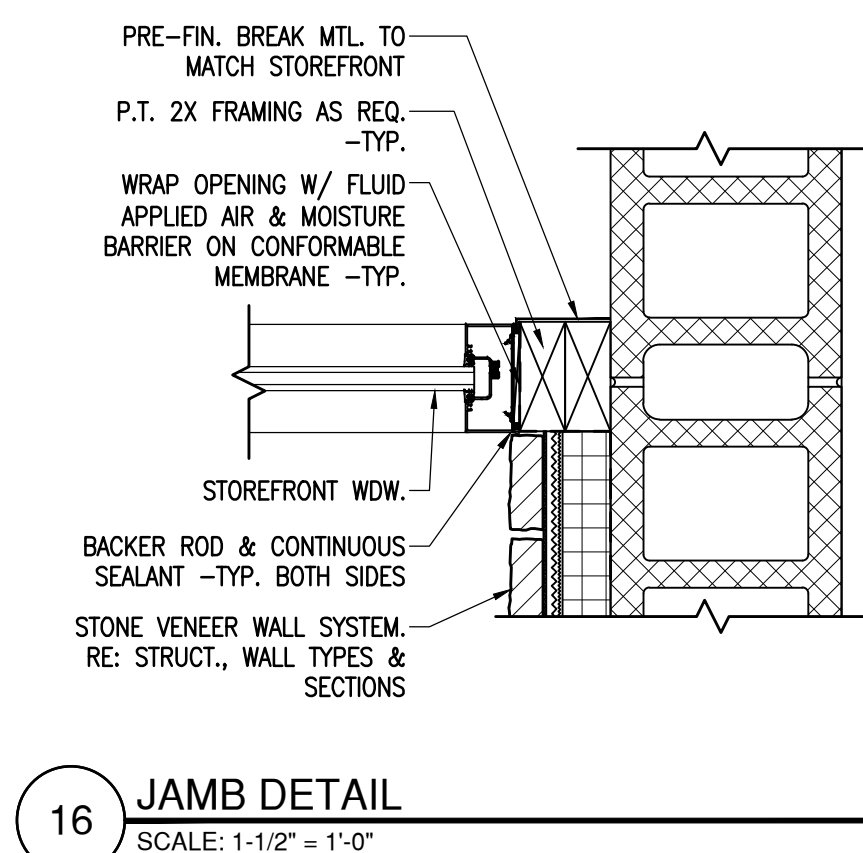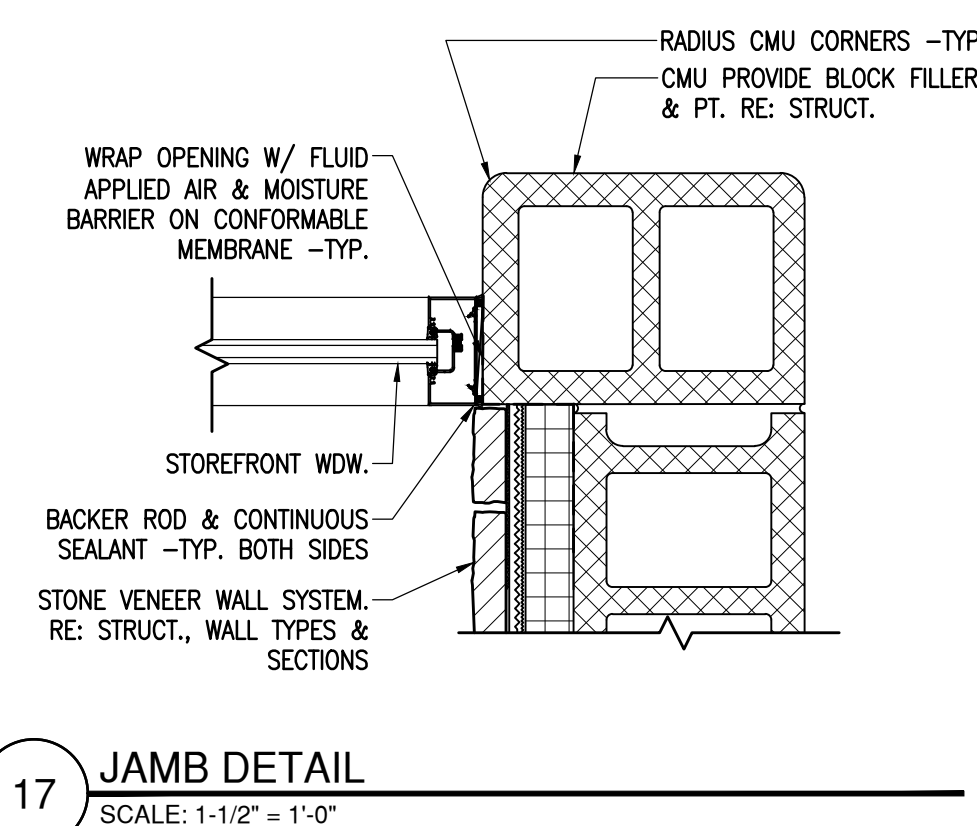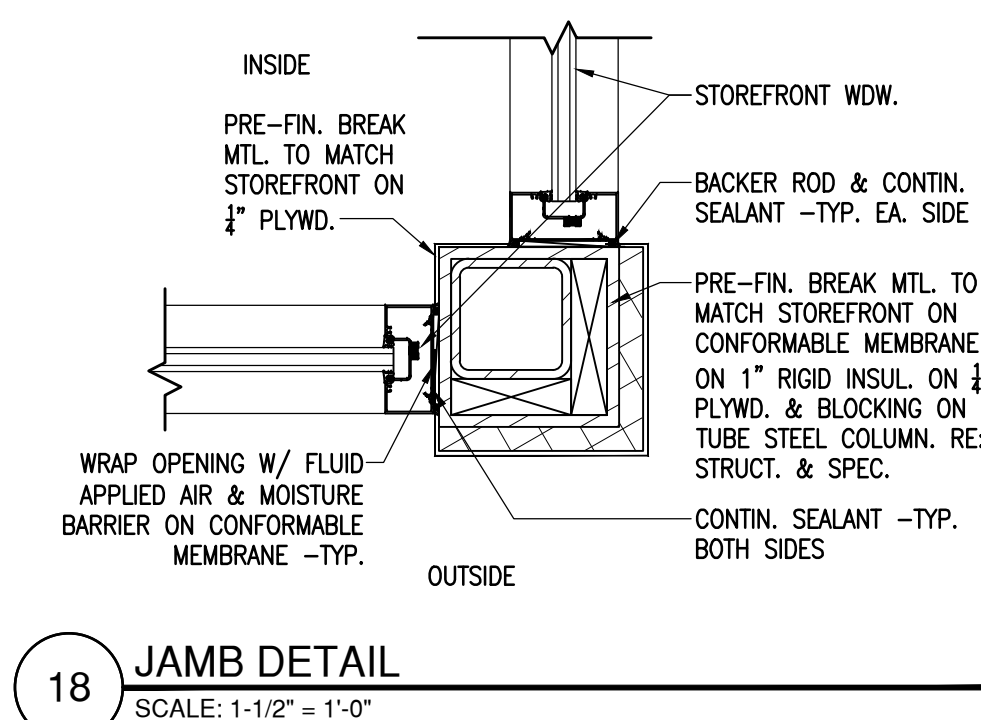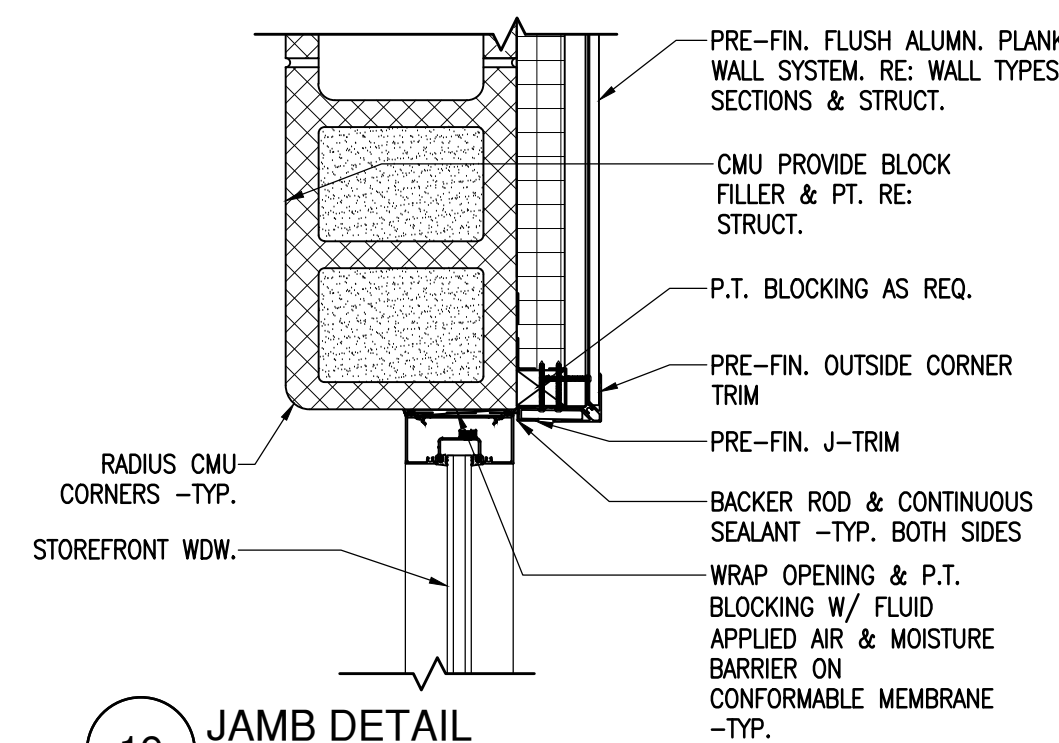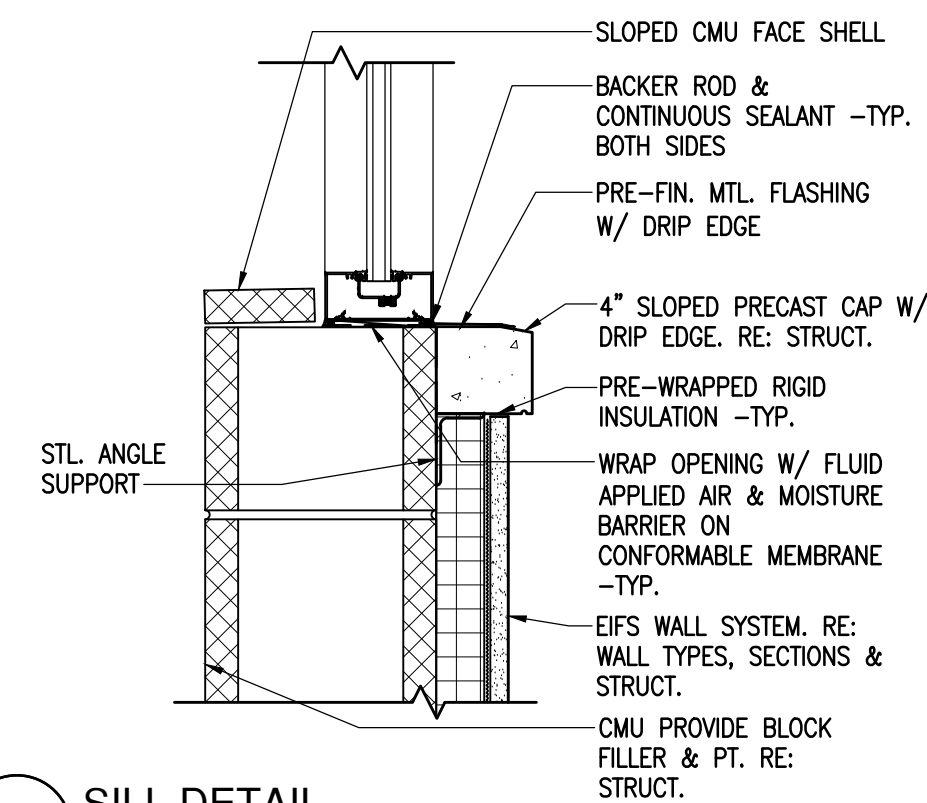

CITY OF THORNTON

FIRE STATION #8

15343 MONACO STREET

THORNTON, COLORADO 80602

ALLRED & ASSOCIATES

ARCHITECTURE | PLANNING | INTERIOR DESIGN
560 BURBANK STREET, SUITE 125, BROOMFIELD, COLORADO 80020
PHONE: 303.465.4306
www.allredarch.com

ARCHITECTURE | PLANNING | INTERIOR DESIGN
580 BURBANK STREET, SUITE 125, BROOMFIELD, COLORADO 80020
PHONE: 303.465.4306 www.allredarch.com

INTERIOR DESIGN
PHONE: 303.465.4306 www.allredarch.com

BID SET

• JOB NO. 2309






1'-1 1/2"=1'-0"

WINDOW DETAILS


A8.3

[illegible]

ISSUE DATE: 2024 0927

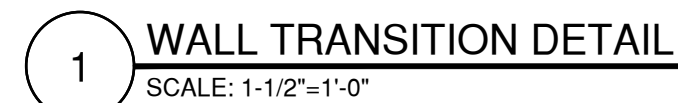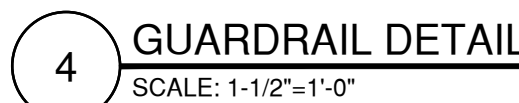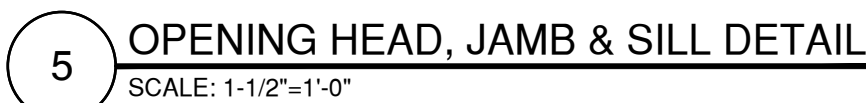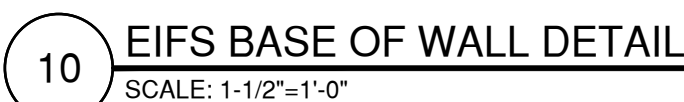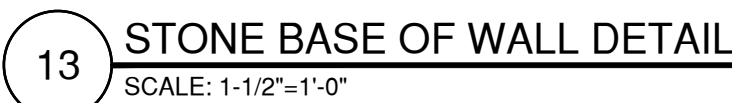

wt. 11 6 5/8"	• 1/2" SHEETROCK Brand FIRECODE C Core Gypsum Panels – 3-5/8" 20 gauge studs 24" o.c. – 3" THERMAFIBER SAFB – RC-1 channel or equivalent one side, spaced 24" o.c. – face layer joints finished	UL Des U419 or U455	61 RAL-TL-87-153 Based on 5/8" thick panels 62 RAL-TL-83-213 Based on 5/8" thick panels 63 RAL-TL-84-138 Based on 5/8" thick panels, 6" 20 gauge structural studs and 5" THERMAFIBER SAFB	
wt. 5 6 5/8"	• 1/2" SHEETROCK Brand FIRECODE C Core Gypsum Panels – 3-5/8" 25 gauge steel studs 24" o.c. – 3" THERMAFIBER SAFB – RC-1 channel or equivalent one side spaced 24" o.c. • optional veneer plaster	54 RAL-TL-83-216 Based on 5/8" thick panels	1 hour	UL Des U419 or U451

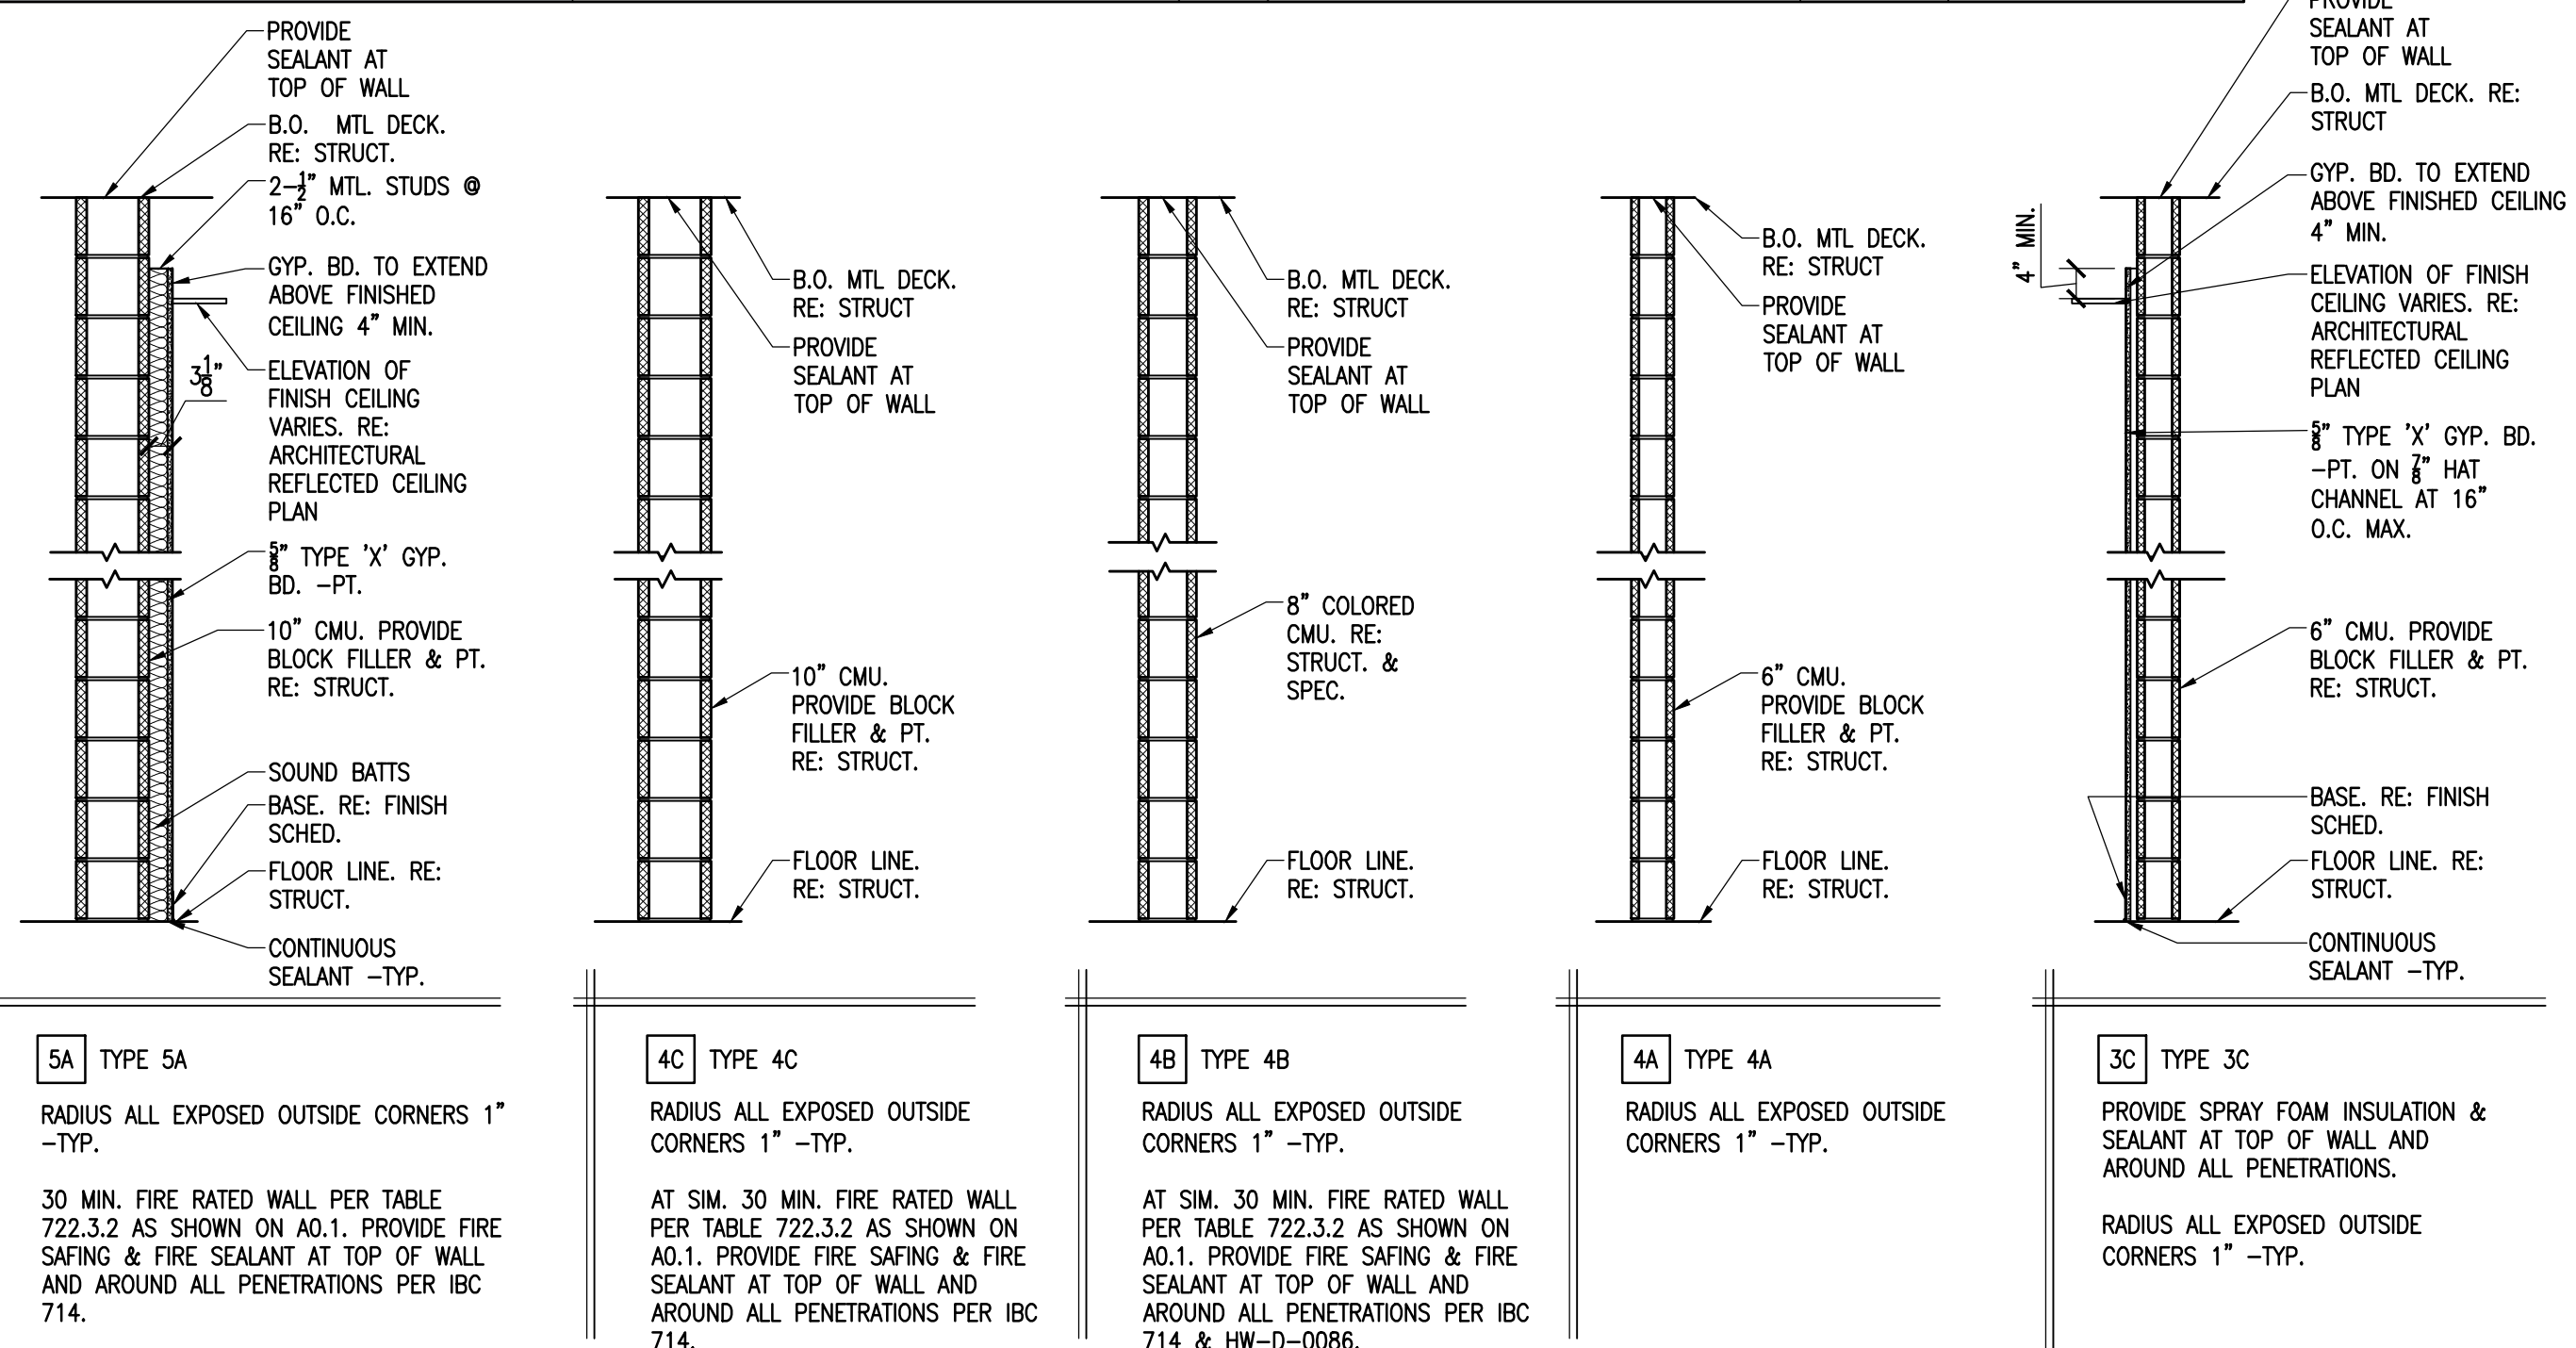

F1 - ALUMINUM COMPOSITE METAL (ACM) OR PRE-FIN. ALUMN. PLANK WALL CONST. (R-13+10CI/U-.055 MIN)
PRE-FIN. ALUMINUM COMPOSITE METAL (ACM) OR ALUMN. PLANK RAINSCREEN PANELS W/ EXTRUDED ALUMINUM MOUNTING CLIPS PER MANF. REQ.
8" GALVANIZED HAT CHANNELS
2" RIGID INSULATION (R-10 MIN.)
FLUID APPLIED AIR & MOISTURE BARRIER
DENGSLASS SHEATHING
6" MTL. STUDS W/ 2" SPRAY FOAM (R-13 MIN.) RE: STRUCT.
8" TYPE "X" GYP. BD. -PT. AT FINISHED AREAS
BASE OF WALL DETAIL RE: 9/A9.0

F2 - PRE-FIN. ALUMN. PLANK WALL CONST. W/ CMU (R-10CI/U-0.08 MIN)
PRE-FIN. ALUMN. PLANK RAINSCREEN PANELS W/ EXTRUDED ALUMINUM MOUNTING CLIPS PER MANF. REQ.
8" GALVANIZED HAT CHANNELS
2" RIGID INSULATION (R-10 MIN.)
FLUID APPLIED AIR & MOISTURE BARRIER
DENGSLASS SHEATHING
6" CMU. TO EXTEND TO METAL DECK. PROVIDE BLOCK FILLER & EPOXY PAINT AT CMU.
BASE OF WALL DETAIL RE: 8/A9.0 SIM.

F3 - PRE-FIN. ALUMN. PLANK WALL CONST. (R-13+10CI/U-.055 MIN)
PRE-FIN. ALUMN. PLANK RAINSCREEN PANELS W/ EXTRUDED ALUMINUM MOUNTING CLIPS PER MANF. REQ.
8" GALVANIZED HAT CHANNELS
2" RIGID INSULATION (R-10 MIN.)
FLUID APPLIED AIR & MOISTURE BARRIER
DENGSLASS SHEATHING
3-5/8" MTL. STUDS W/ 2" SPRAY FOAM (R-13 MIN.) ON 6" MTL. STUDS RE: STRUCT. (AT SIM. FURR OUT INTERIOR WALL W/ 2-1/2" MTL. STUDS)
8" TYPE "X" GYP. BD. -PT. AT FINISHED AREAS
BASE OF WALL DETAIL RE: 8/A9.0

F4 - EIFS
EIFS SYSTEM (FINISH COAT ON PRIMER ON BASE COAT ON MESH)
2" RIGID INSULATION (R-10 MIN.)
ADHESIVE
FLUID APPLIED AIR & MOISTURE BARRIER
DENGSLASS SHEATHING
3-5/8" MTL. STUDS W/ 2" SPRAY FOAM (R-13 MIN.) ON 6" MTL. STUDS RE: STRUCT. (AT SIM. FURR OUT INTERIOR WALL W/ 2-1/2" MTL. STUDS)
8" TYPE "X" GYP. BD. -PT AT FINISHED AREAS
BASE OF WALL DETAIL RE: 10/A9.0


F5 - EIFS
EIFS SYSTEM (FINISH COAT ON PRIMER ON BASE COAT ON MESH)
2" RIGID INSULATION (R-10 MIN.)
ADHESIVE
FLUID APPLIED AIR & MOISTURE BARRIER
10" CMU. TO EXTEND TO METAL DECK. RE: STRUCT.
PROVIDE BLOCK FILLER & EPOXY PAINT AT CMU.
BASE OF WALL DETAIL RE: 12/A9.0 SIM.

F6 - STONE VENEER
STONE VENEER W/ GROUT & FASTENERS AS REQ. PER MAN.
ADHESIVE MORTAR ON BASE COAT ON MESH
2" RIGID INSULATION (R-10 MIN.)
ADHESIVE
FLUID APPLIED AIR & MOISTURE BARRIER
DENGSLASS SHEATHING
6" MTL. STUDS W/ 2" SPRAY FOAM (R-13 MIN.) RE: STRUCT.
FURR OUT INTERIOR WALL W/ 2-1/2" MTL. STUDS
8" TYPE "X" GYP. BD. -PT AT FINISHED AREAS
BASE OF WALL DETAIL RE: 13/A9.0

F7 - STONE VENEER
STONE VENEER W/ GROUT & FASTENERS AS REQ. PER MAN.
ADHESIVE MORTAR ON BASE COAT ON MESH
2" RIGID INSULATION (R-10 MIN.)
ADHESIVE
FLUID APPLIED AIR & MOISTURE BARRIER
10" CMU. TO EXTEND TO METAL DECK.
PROVIDE BLOCK FILLER & EPOXY PAINT AT CMU.
BASE OF WALL DETAIL RE: 12/A9.0

1. PROVIDE BLOCKING AS REQUIRED FOR SUPPORT AT ALL WALL & CEILING ASSEMBLIES.
2. PROVIDE 5/8" CEMENTITIOUS BACKERBOARD AT ALL TILE LOCATIONS.
3. PROVIDE WR GP. BD. @ ALL WALL LOCATIONS INCLUDING BUT NOT LIMITED TO TOILET ROOMS, KITCHEN AND LAUNDRY ROOM.
4. PROVIDE SOUND BATT INSULATION @ TOILET & BUNK ROOM CEILINGS.
5. ALL INSIDE VERTICAL CMU CORNERS CONNECTED TO GYP. BD. W/ MTL. STUD WALL TYPES TO HAVE CONTINUOUS SEALANT.
6. SOUND ISOLATION CAULKING AT ALL JOINT PENETRATIONS.

SCALE: 1/2"=1'-0"

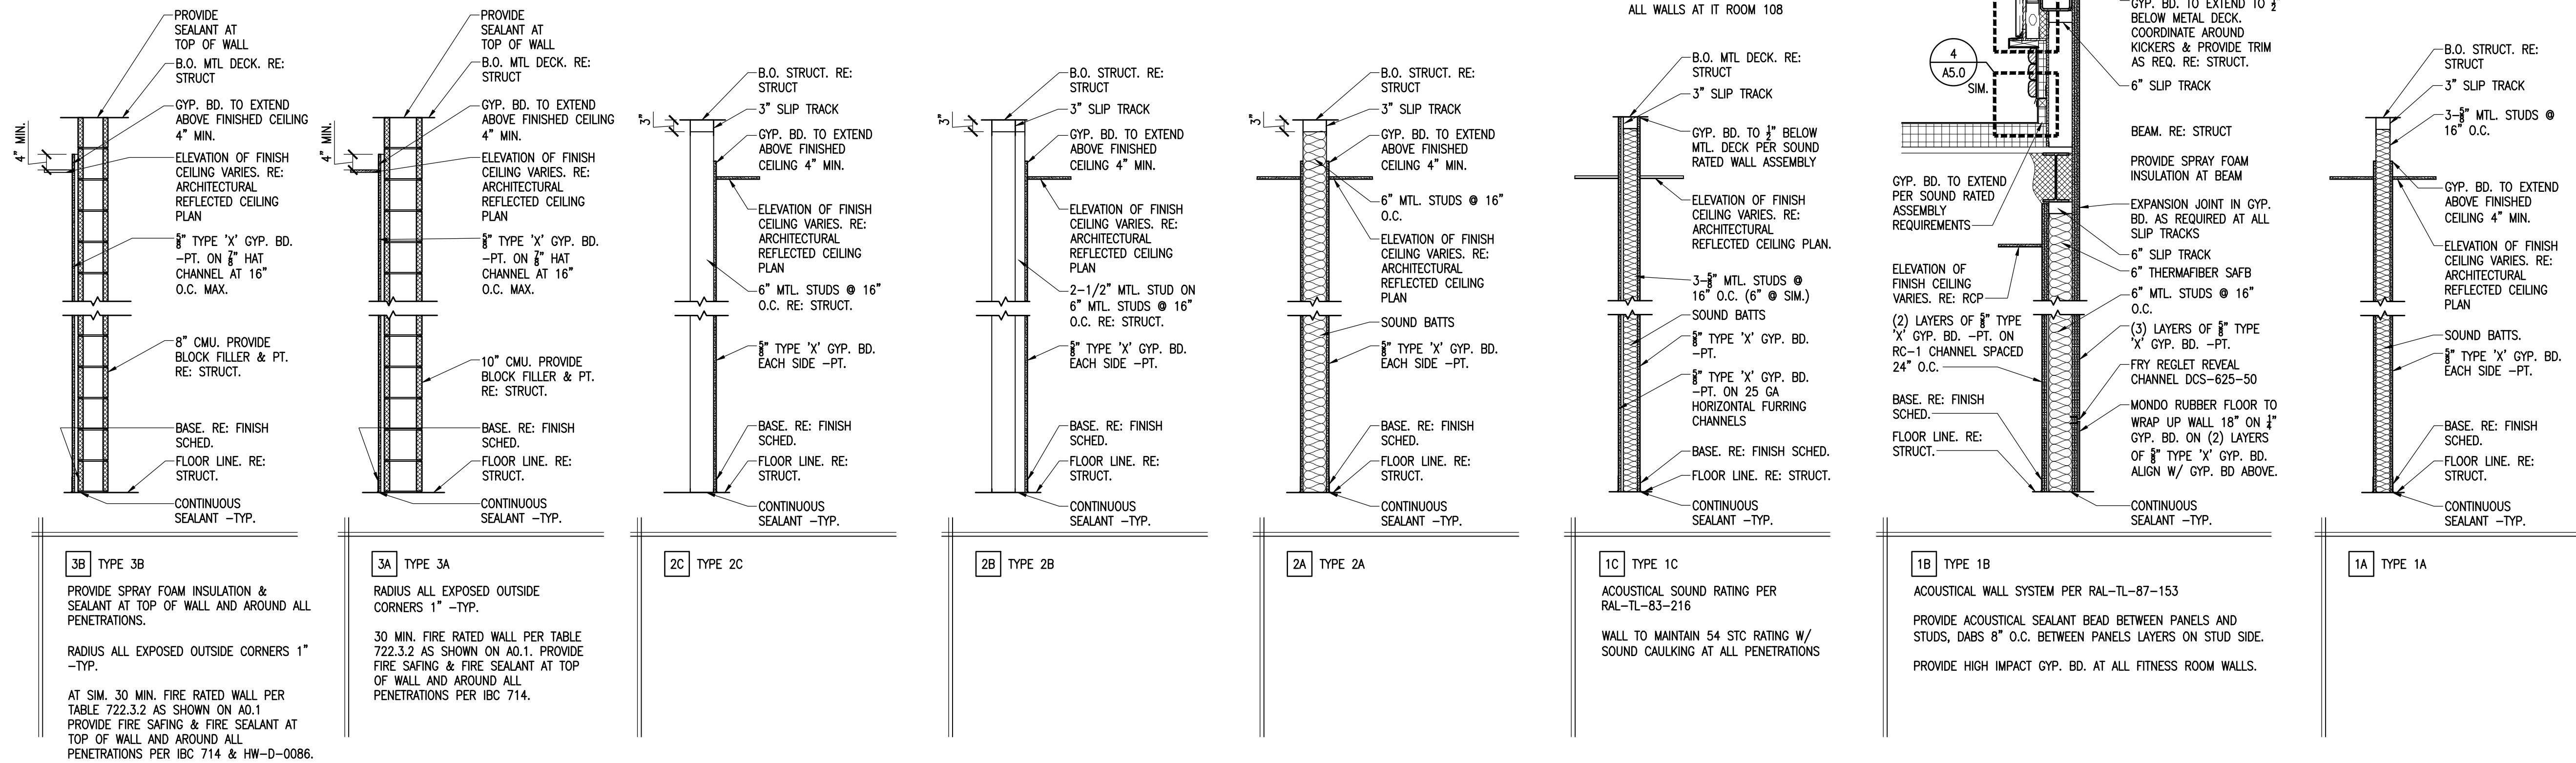

SCALE: 1/2"=1'-0"