

3.4.2 Lateral Stability

Each block contains typically 350mm thick reinforced concrete stability cores which extend the full height of the buildings Block A4 contains 400mm thick RC coupled shear walls. The cores enclose the lift shafts, stairs and provide overall lateral stability to the blocks. The walls are connected by lintel beams over the door openings. Block A1 also features a shear wall separating two apartments (Figure 21) to satisfy $h/300$ sway limit under wind loading, where h is a storey height.

The floor slabs act as horizontal diaphragms, transferring the lateral loads imposed on the cladding back to the stability cores, the resulting overturning (vertical push-pull) and sliding (lateral) reaction forces are resisted by the core cap foundations.

It is assumed that the slabs are connected to the reinforced concrete walls via a proprietary system e.g. Kwikastrip. This provides flexibility in terms of the method of construction of the core walls.

Each of the blocks has one central core, independent of the other blocks.

The movement joint at podium level avoids indirectly sharing lateral loads between blocks based on the relative stiffness of the cores for any given wind direction.

At this stage the lateral stability of each block has been assessed independently of other blocks where not broken by the movement joint. This ensures each block has sufficient lateral stability without reliance on another block.

Typical core layouts plans are shown in Figure 21.

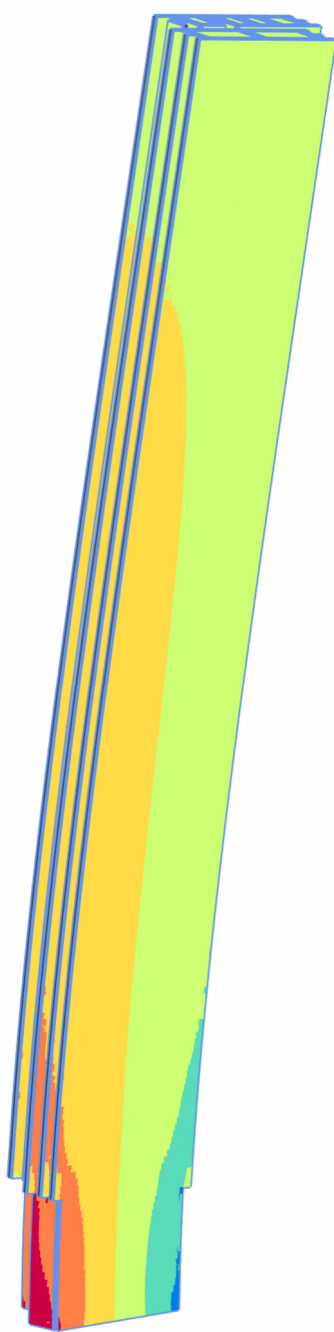


Figure 19 Block A4 Building Sway and Axial Stresses in the Cores Under Wind Load

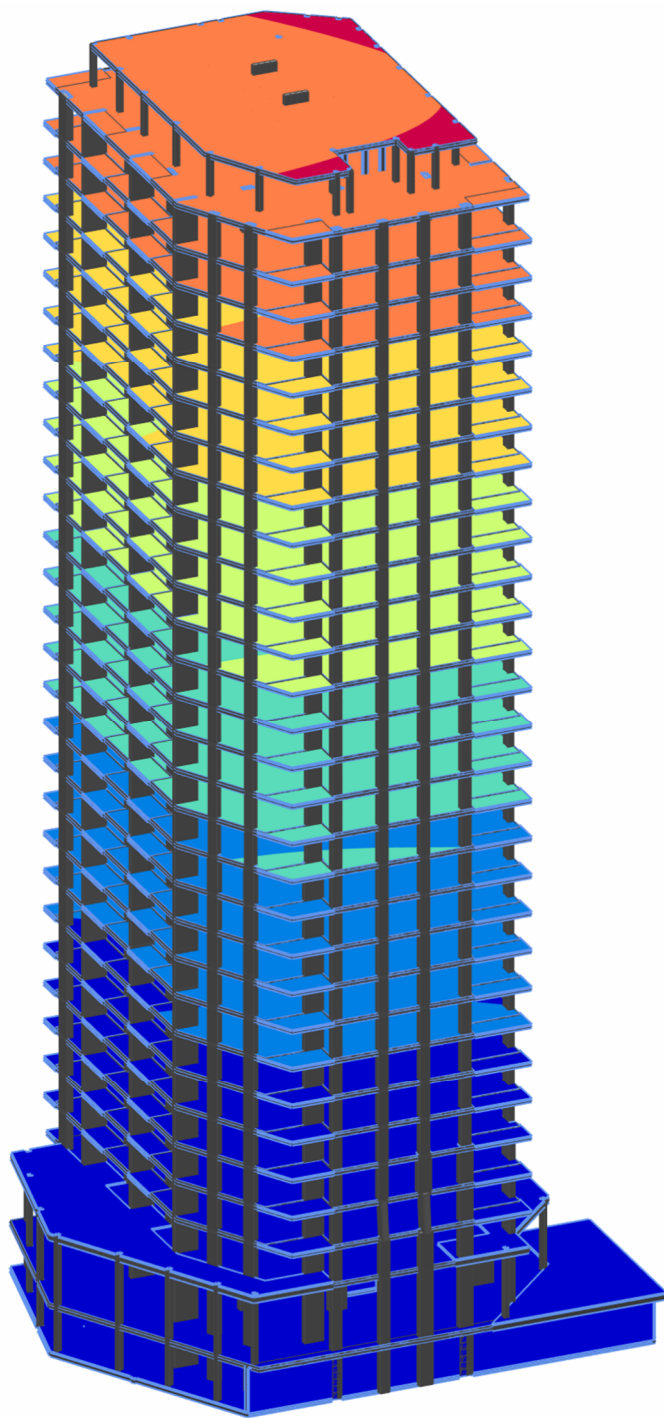


Figure 18 Block A4 Building Sway Under Wind Load

3.5 Podium

3.5.1 Overview

The podium slab supports a landscaped accessible area between the blocks. The podium is constructed using a 450mm thick slab to accommodate the heavier landscaping loading.

A vertical movement joints have been provided between each of the blocks at the podium slab to separate the blocks and control shrinkage stresses (Figure 21). Double vertical structure has been provided along the movement joint to support the slabs along the interface. The gap along the movement joint will be sealed by a propriety product to ensure weather tightness.

The podium slab covers an underground car park, employment spaces, communal amenity space, car parking, cycle parking and refuse storage. The column positions for the central zone were coordinated with the architects to achieve the required layout and vehicle manoeuvring clearances.

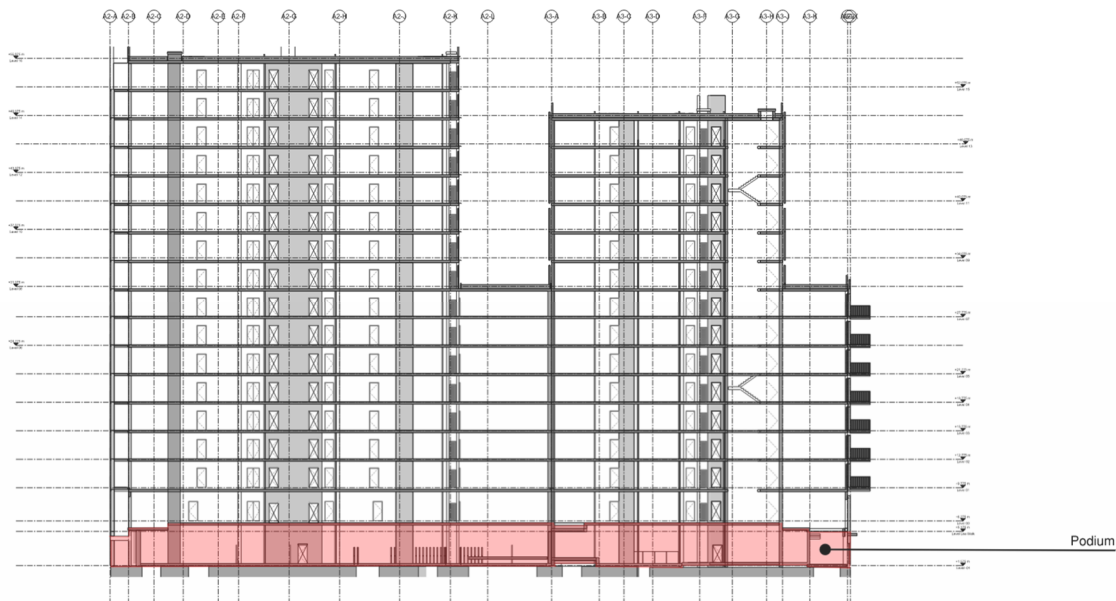


Figure 20 Cross-Section View Through Blocks A2 and A3 Showing the Podium Structure



Figure 21 Plan View of the Podium Level Slab with the Vertical Movement Joint Highlighted

3.6 Foundations and Substructure

3.6.1 Piling and Basement Slab

The foundation scheme utilises discrete pile groups and pile caps at the base of the columns and cores. Pile caps vary between 1600mm and 2400mm deep and have been optimised based on their associated column or core loads (Figure 23).

Piles founded in the London Clay transfer the loads from the building deeper into the ground and reduce the settlement compared to a raft solution. All piles are to be 750 mm diameter for Block A1-A3 (or as per the Keller Piling design), while the piles supporting the concrete core of Block A4 are to be 900mm diameter (or as per the Keller Piling design).

The groundwater level is taken as 5.600mOD.

Due to the ground conditions, the basement slab is typically a 300mm thick reinforced concrete suspended slab, spanning between the pile caps. There is an area of slab running down the West side of the basement where the slab is 450mm thick to accommodate the high hydrostatic pressures. There are some steps and folds within the slab for changing levels and thicknesses. Lift pits are also provided within the core caps at the base of each lift shaft.

The substructure has been designed for a varying hydrostatic pressure of 53 kPa at the West end of the basement dropping off to 0kPa in a linear fashion towards the Bidder Street end of the basement to the East. The West end of the basement has the bottom of the basement slab at 5.3m below the top of the podium slab, thus a hydrostatic pressure of 53kPa can be generated at this end. To the East end of the basement, the slab aligns closely with proposed external ground levels.

The characteristics of the London Clay layer give rise to a phenomenon referred to as ‘heave’ as the material swells after excavation. Due to the magnitude of the heave uplift force, it has been more economical for the substructure design to provide a proprietary heave board, such as Cordek Heaveguard rather than design the structure to resist the uplift forces. The substructure is designed for a relatively small differential heave based on the crushing capacity of the heave board above the self-weight of the basement slab.

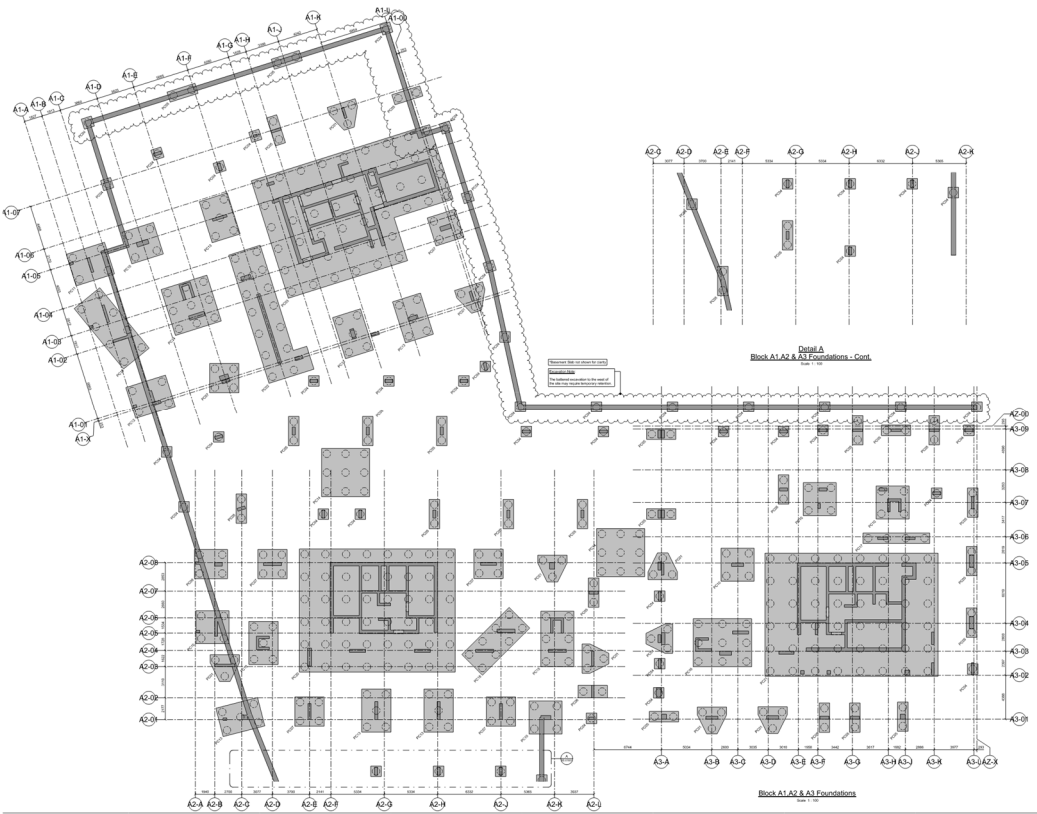


Figure 23 Pilecap Layout and Perimeter Retention

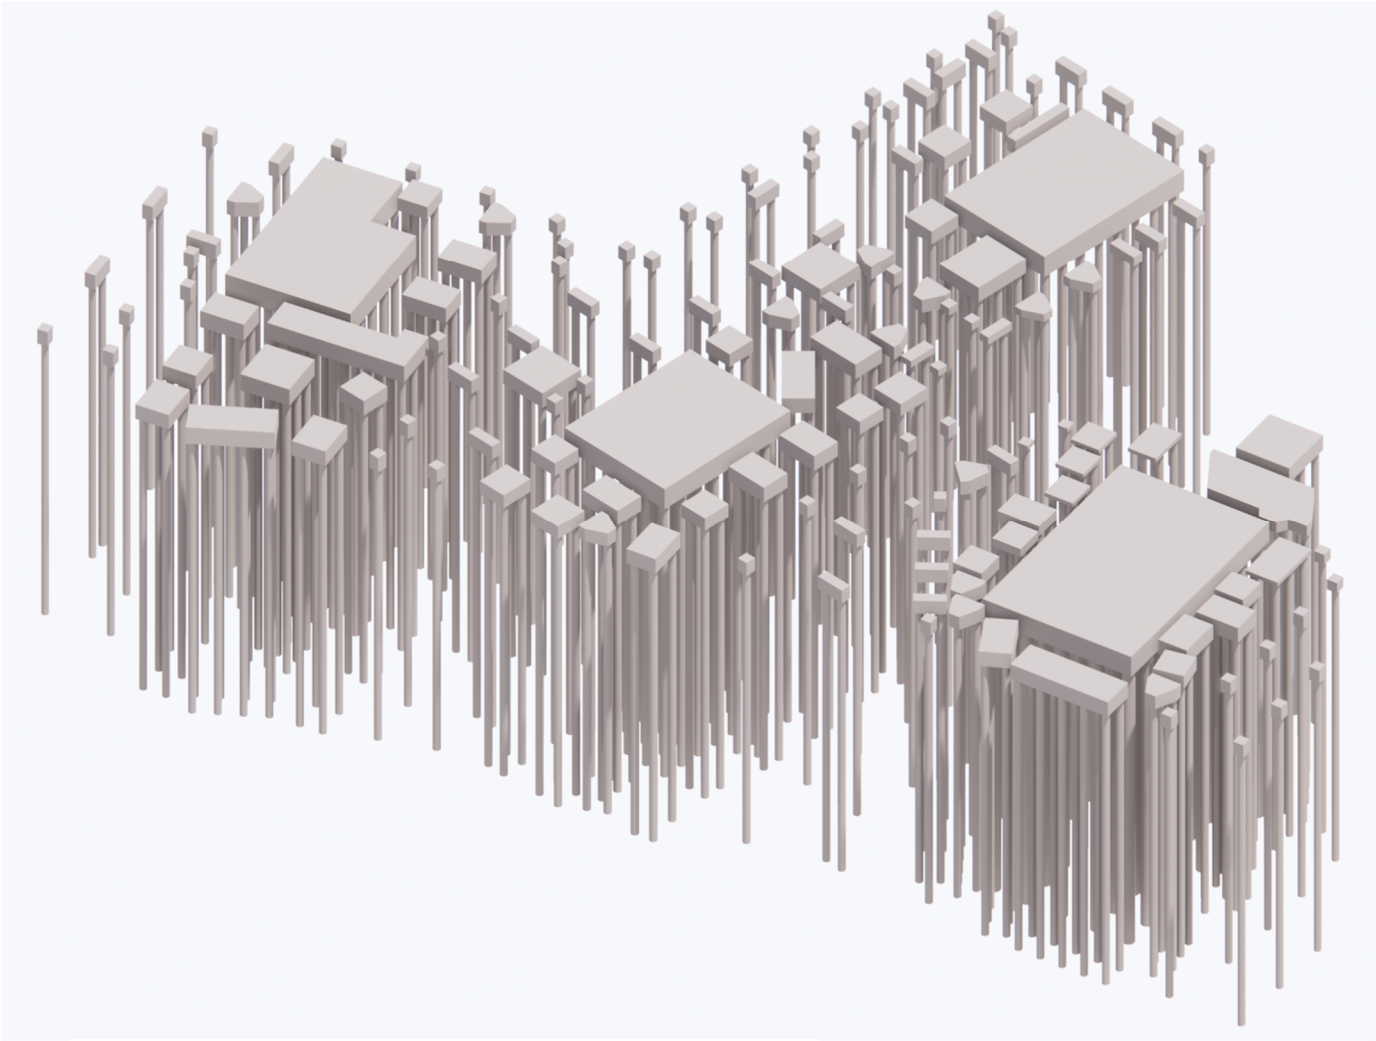


Figure 22 Axonometric View of the Foundations and Substructure

3.6.2 **Basement and Retaining Structures**

Block A has a single-storey basement, retained by a 450mm thick in-situ reinforced concrete retaining wall along almost entire perimeter of the site, apart of the East part of the blocks, to align with future ground levels across the site (Figure 24).

Space limitations on the boundary of the plot mean that along the North and West sides, the excavation may require temporary retention.

The basement is to be tanked to achieve Grade 2 waterproofing to all residents lobbies, plant rooms, risers and store rooms.

The basement is to be tanked to achieve Grade 1B waterproofing to car parking and bike store areas.

The tanking strategies are to the specialist waterproofing contractors design (Premcrete). However, the strategy is use of Type A and Type B protection measures throughout. The proposed Type A protection is through a pre-applied membrane and the Type B protection gained through integral waterproof concrete.

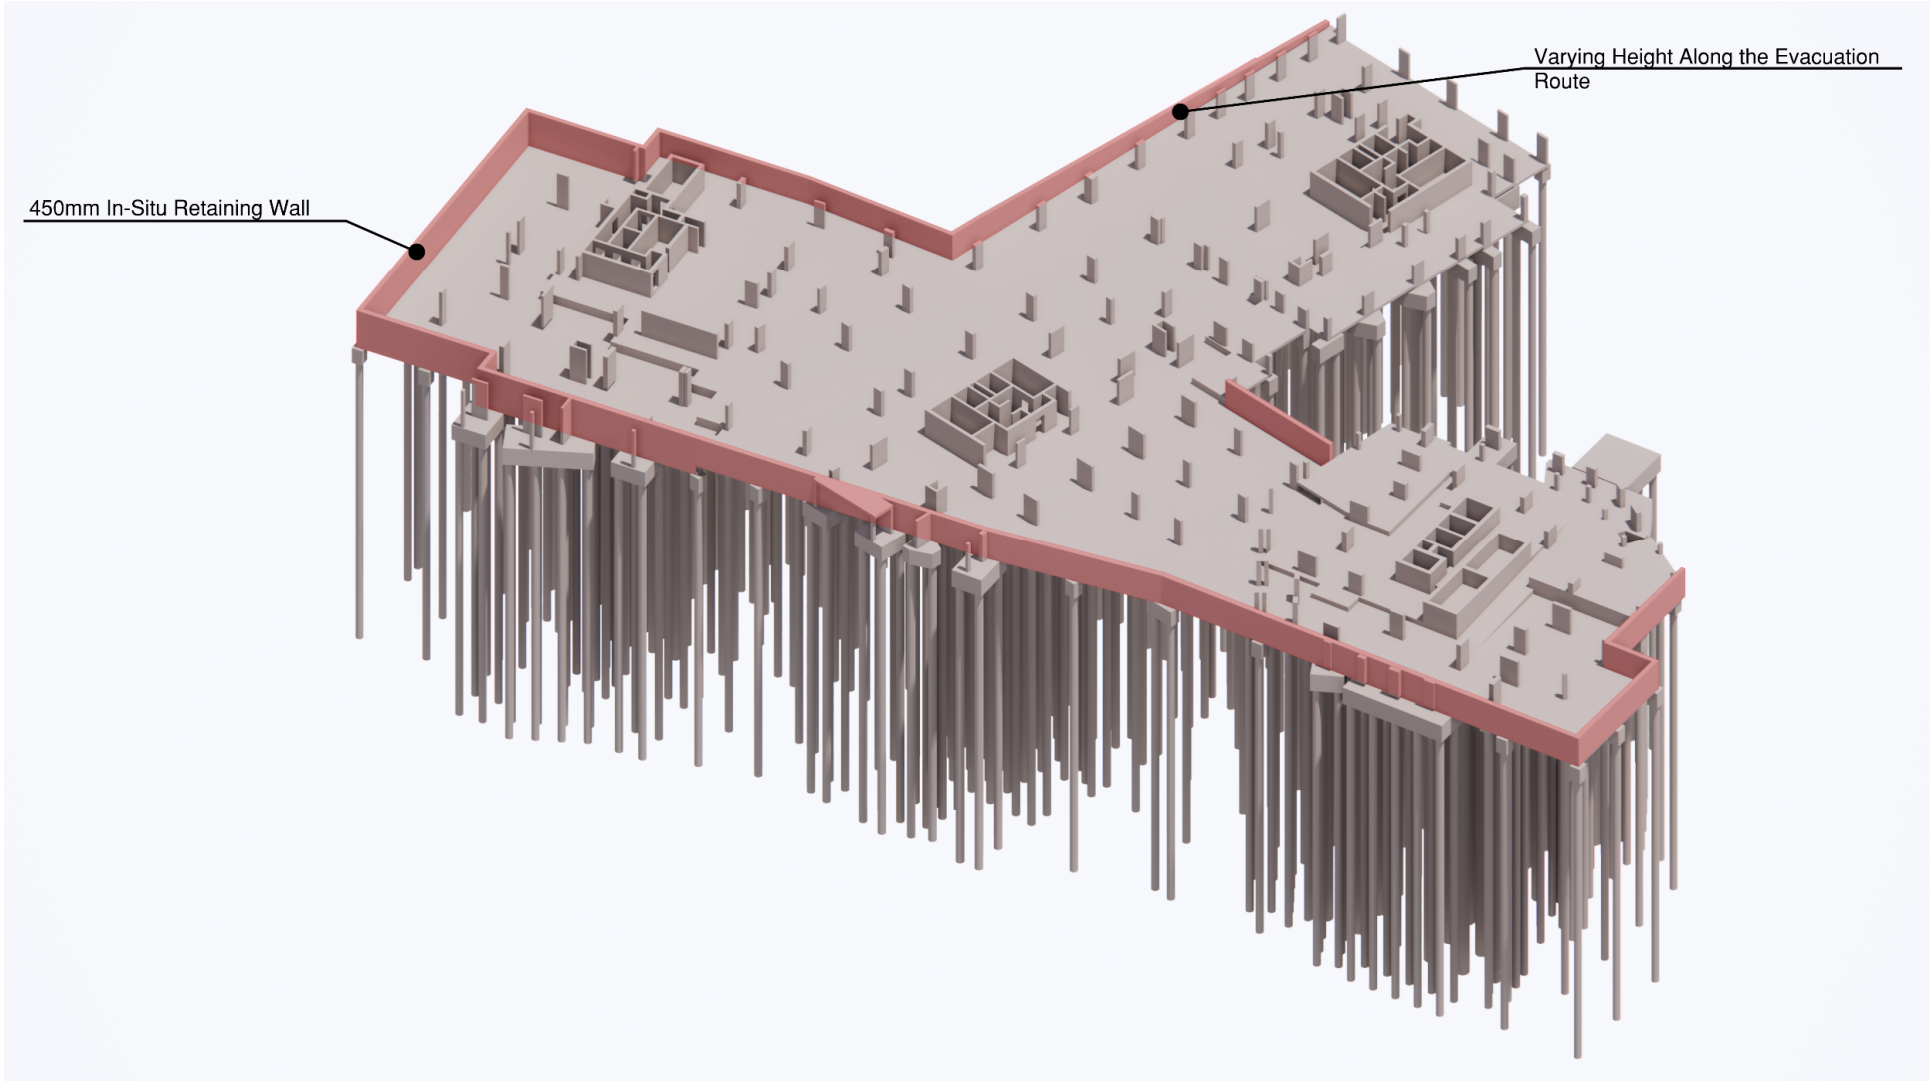


Figure 24 Axonometric View of the Perimeter Retaining Walls

4. Building Information Modelling (BIM)

Design interfaces and multi-discipline coordination has been managed by regularly sharing native Revit models produced by each of the core disciplines. The Structural Revit model has been produced to an appropriate level of development for this RIBA Stage.

File naming has been carried out in accordance with Barratt's BIM Execution Plan.

The model has been produced in Revit 2022.

Links:

Project contacts:

File:

Crown Wharf - Project Contacts V5.pdf

Location:

\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\02 PROJECT ADMIN\02 Filing List, Project Directory\

File:

ARP Stage 4 Information required_230530.pdf

Location:

\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\02 PROJECT ADMIN\03 Programme\

River Wall:

File:

RE_Crown Wharf - River Wall Survey.msg

Location:

\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\05 EXTERNAL\02 Incoming Docs\220707 river wall images\

File:

D1030-BLA-XX-RP-C-00001.pdf

Location:

\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\05 EXTERNAL\02 Incoming Docs\220729 river wall report\

File:

01450_Crown Wharf_River Wall Study_230602.pdf

Location:

\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\05 EXTERNAL\02 Incoming Docs\230717 River Wall Alignment\

File:

CROWH-ARP-SW-00-DR-SE-91000.pdf

Location: (nice 3d view)

\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\04 DELIVERABLES\01 Outgoing Documents\2023-08-17 river wall drawings\

Site, remedial works, ground conditions:

File:

389.41.11 - Crown Wharf, Canning Town - Remediation Validation Report V1.5 20-04-22.pdf

Location:

\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\05 EXTERNAL\02 Incoming Docs\230116 remediation report\

Site Photos:

Location:

\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\06 SITE\09 Photographs\22-11-04\

GI

File:

389.41.01 - EMR - Canning Town - Intrusive Ground Investigation Report.pdf

Location:

hdro

Fire Strategy:

File:

CROWH-BB7-AZ-ZZ-RP-FE-09000.pdf

Location:

\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\05 EXTERNAL\02 Incoming Docs\231003 Stage 3 Fire Strategy (Building A)\

Wind Microclimate

File:

CW_ESVOL1_CH11_WINDMICROCLIMATE.PDF

Location:

\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\05 EXTERNAL\02 Incoming Docs\230929 Enviromental Statement - Wind Microclimate\

Tunnel :

Location:
\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\05 EXTERNAL\02 Incoming Docs\230515 UKPN tunnel\

Piling Tender Drawings:

File:
Combined.pdf

Location:
\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\04 DELIVERABLES\01 Outgoing Documents\2023-11-21 Piling Tender Drawings, Pile Spec and Risk Register\

GA Issue:

Location:
\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\04 DELIVERABLES\01 Outgoing Documents\2023-12-06 Block A Drawing Issue\A4\

Flood Risk Assessment:

File:
CROWH-ARP-ZZ-ZZ-RP-WR-00001 - P05.pdf

Location:
\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\04 DELIVERABLES\01 Outgoing Documents\2023-12-06 Revised FRA\

Tunnel GMA

File:
CROWH-ARP-ZZ-ZZ-GX-RP-00003 .pdf

Location:
\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\04 DELIVERABLES\01 Outgoing Documents\2023-10-05 UKPN Tunnel GMA\

File:
CROWH-ARP-ZZ-ZZ-GX-RP-00001.pdf

Location:
\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\04 DELIVERABLES\01 Outgoing Documents\2023-08-01 UKPN Outline Planning Method Statement\

Drainage Strategy:

File:
CROWH-ARP-ZZ-ZZ-DR-RP-00001.pdf

Location:
\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\04 DELIVERABLES\01 Outgoing Documents\2022-12-22 Drainage Strategy\

Commission brief

File:
2023 06 08 - Arup Crown Wharf inc BIM 17.05.2023 JH DS1(124672227.3)-ARUP REVIEW DJM_210823.pdf

Location:
\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\01 COMMERCIAL\02 Commission Brief\


UXO

File:
UXO REVIEW, BARRATTS, CROWN WHARF, REV 1.PDF

Location:
\\Global\Europe\Glasgow\Jobs\280000\288226-00 (Crown Wharf Canning Town)\05 EXTERNAL\02 Incoming Docs\230911 UXO Documentation\

Appendix A





Concrete Column Schedule	
ID Type Mark	Type
CC1	360 x 360 RC Column
CC2	375 x 350 RC Column
CC3	500 x 500 RC Column
CC4	500 x 500 RC Column
CC5	600 x 450 RC Column
CC6	750 x 400 RC Column
CC8	750 x 500 RC Column
CC7	800 x 350 RC Column
CC9	900 x 350 RC Column
CC10	900 x 400 RC Column
CC11	900 x 450 RC Column
CC12	900 x 500 RC Column
CC13	1000 x 250 RC Column
CC14	1000 x 400 RC Column
CC15	1000 x 500 RC Column
CC16	1100 x 270 RC Column
CC17	1250 x 250 RC Column
CC18	1250 x 300 RC Column
CC19	1250 x 450 RC Column
CC20	1500 x 250 RC Column
CC21	1500 x 400 RC Column
CC22	1600 x 250 RC Column
CC23	2000 x 250 RC Column
CC24	2000 x 300 RC Column
CC25	2200 x 250 RC Column

Wall Schedule	
Type Mark	Type
W1	250mm thick RC Wall
W2	300mm thick RC Wall
W3	350mm thick RC Wall
W4	350mm thick Shear Wall

Concrete Beam Schedule	
ID Type Mark	Type
CB1	250 x 375dp RC Beam
CB2	250 x 775dp RC Beam
CB3	250 x 815dp RC Beam
CB4	250 x 1040dp RC Beam
CB5	250 x 900dp RC Beam
CB6	250 x 1975dp RC Beam
CB7	300 x 300dp RC Beam
CB10	450 x 325dp RC Beam
CB11	1875 x 800dp RC Beam
CB12	250 x 1925dp RC Beam
CB13	250 x 440dp RC Beam
CB14	250 x 1100dp RC Beam

Upstand Schedule	
Type Mark	Type
UP1	140 mm thick Upstand
UP2	150 mm thick Upstand
UP3	160 mm thick Upstand
UP4	170 mm thick Upstand
UP5	175 mm thick Upstand
UP6	200 mm thick Upstand
UP7	215 mm thick Upstand
UP8	250 mm thick Upstand
UP9	300 mm thick Upstand
UP10	350 mm thick Upstand
UP11	500 mm thick Upstand
UP12	50 mm thick Upstand
UP13	100 mm thick Upstand
UP14	142.5 mm thick Upstand
UP15	163 mm thick Upstand
UP16	450 mm thick Upstand
UP17	203 mm thick Upstand


- Loading Key:**
- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
 - Balconies > SDL = 1.0kPa, IL = 2.5kPa
 - Roof > SDL = 3.0kPa, IL = 1.5kPa
 - Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
 - Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
 - Podium >SDL = 14.5kPa, IL = 5.0kPa
 - Gym > SDL = 1.5kPa, IL = 5.0kPa
 - Office > SDL = 1.5kPa, IL = 3.0kPa
 - Lounge >SDL 1.5kPa, IL = 3.0kPa
 - Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
 - Storage > SDL = 1.5kPa, IL = 7.5kPa
 - Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
 - ASHP Roof Load > SDL = 3.0kPa, IL = 4 kPa

Notes :

- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
- Internal blockwork walls as per Arch. drawings

Indicative Steelwork Balcony Plan

Scale 1 : 50

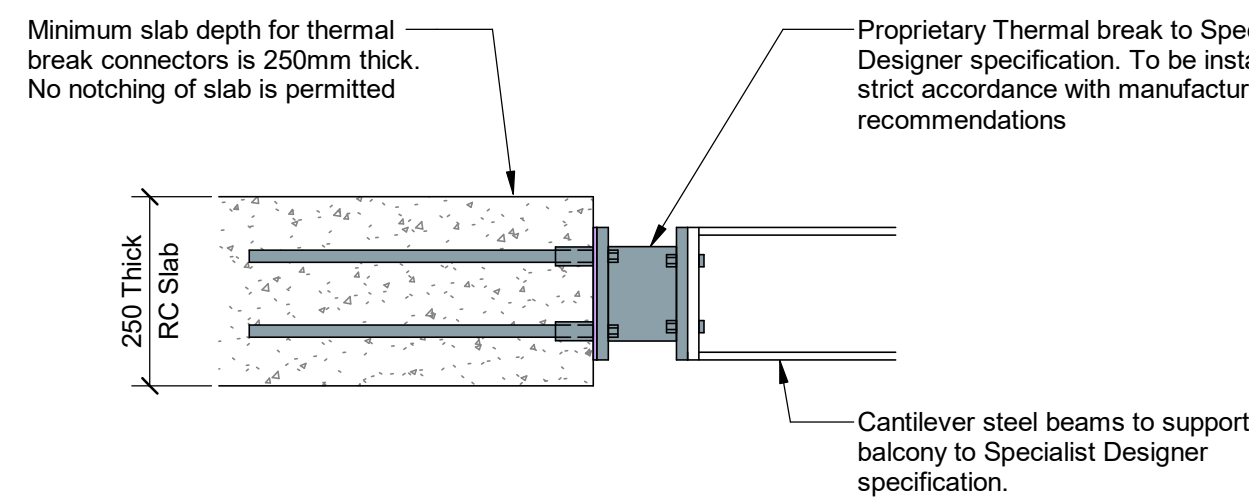

Indicative Steelwork Balcony Detail

Scale 1 : 10

Builders Work Hole Key
Refer to level below for setting out if no dimensions at current level.


- a 200x200mm Void through slab
- b 200x400mm Void through slab
- c 200x600mm Void through slab
- d 250x250mm Void through slab
- e 120x250mm Void through slab
- f 110mm Dia. Void through slab
- g 377mm Dia. Void through slab
- h 300x300mm Void Through slab
- i 150x150mm Void Through slab
- k 165x165mm Void Through slab
- l 140x140mm Void Through slab

Builderswork openings for drainage pipework to be formed using fill the collars except on roofs. Gullies to be cast-in. Refer to Architect and MEP consultant drawings for location and specification.

Overall opening sizes, including any provision of manholes for offsets, must not exceed the overall size indicated on the Structural Drawings

- Key:**
- Denotes Masonry support angles
 - Masonry support angles at every second level starting from Level 0.
 - Masonry ancillary products including but not limited to masonry support angles, lintels, wall ties and reveal supports to Specialist designation and setting out.
 - Adequate allowances to be made in Specialist designers load calculations for lintel behaviour increasing line loads on support angles accordingly.
 - Perimeter SFS to Cladding Contractor design. Brickwork to be tied back to Specialist designers specification. Appropriate consideration to be given to additional tying requirements around openings.
 - Denotes Structural thermal break cantilever between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
 - Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
 - Denotes 60mm Dia hole for overflow pipe (Refer to Architect's drawings for level and setting out)
 - Denotes 100mm recess in slab for future shower tray installation. TOC = SSL - 100mm
 - Denotes Slab with sloping top surface. Soft level flat. Refer to plans for level variation.
 - Denotes Lift Entrance Recesses
 - Denotes RC Upstand
 - Denotes Steelwork balcony to specialist contractor design.
 - Cantilever steel beams to support balcony. Beams at max. 1.0m centres and positioned to avoid RC columns. Beams fixed to RC slab edge with structural thermal breaks to specialist contractor design.
 - Denotes Steelwork canopy to specialist contractor design.
 - Cantilever steel beams to support canopy. Beams at max. 1.0m centres and positioned to avoid RC columns. Beams fixed to RC slab edge with structural thermal breaks to specialist contractor design.
 - Denotes Manhole. Refer to underground drainage drawings for manhole setting out.
 - CP1 Denotes 450x450 RC Plinth

- Notes:**
- Drawings to be read in conjunction with all relevant architects and engineers drawings and specifications.
 - For structural notes refer to drawings: H8656-ARU-ZZ-ZZ-DR-SE-00001.
 - All dimensions are in mm unless noted otherwise.
 - Do not scale this drawing.
 - RC columns and walls to be grade C50/60 U.N.O.
 - RC pile caps to be grade C40/50 U.N.O.
 - RC slabs to be grade C32/40 U.N.O.
 - RC retaining walls to be grade C32/40 U.N.O.
 - Layout based on Architectural layouts and models as at 14/05/2025.

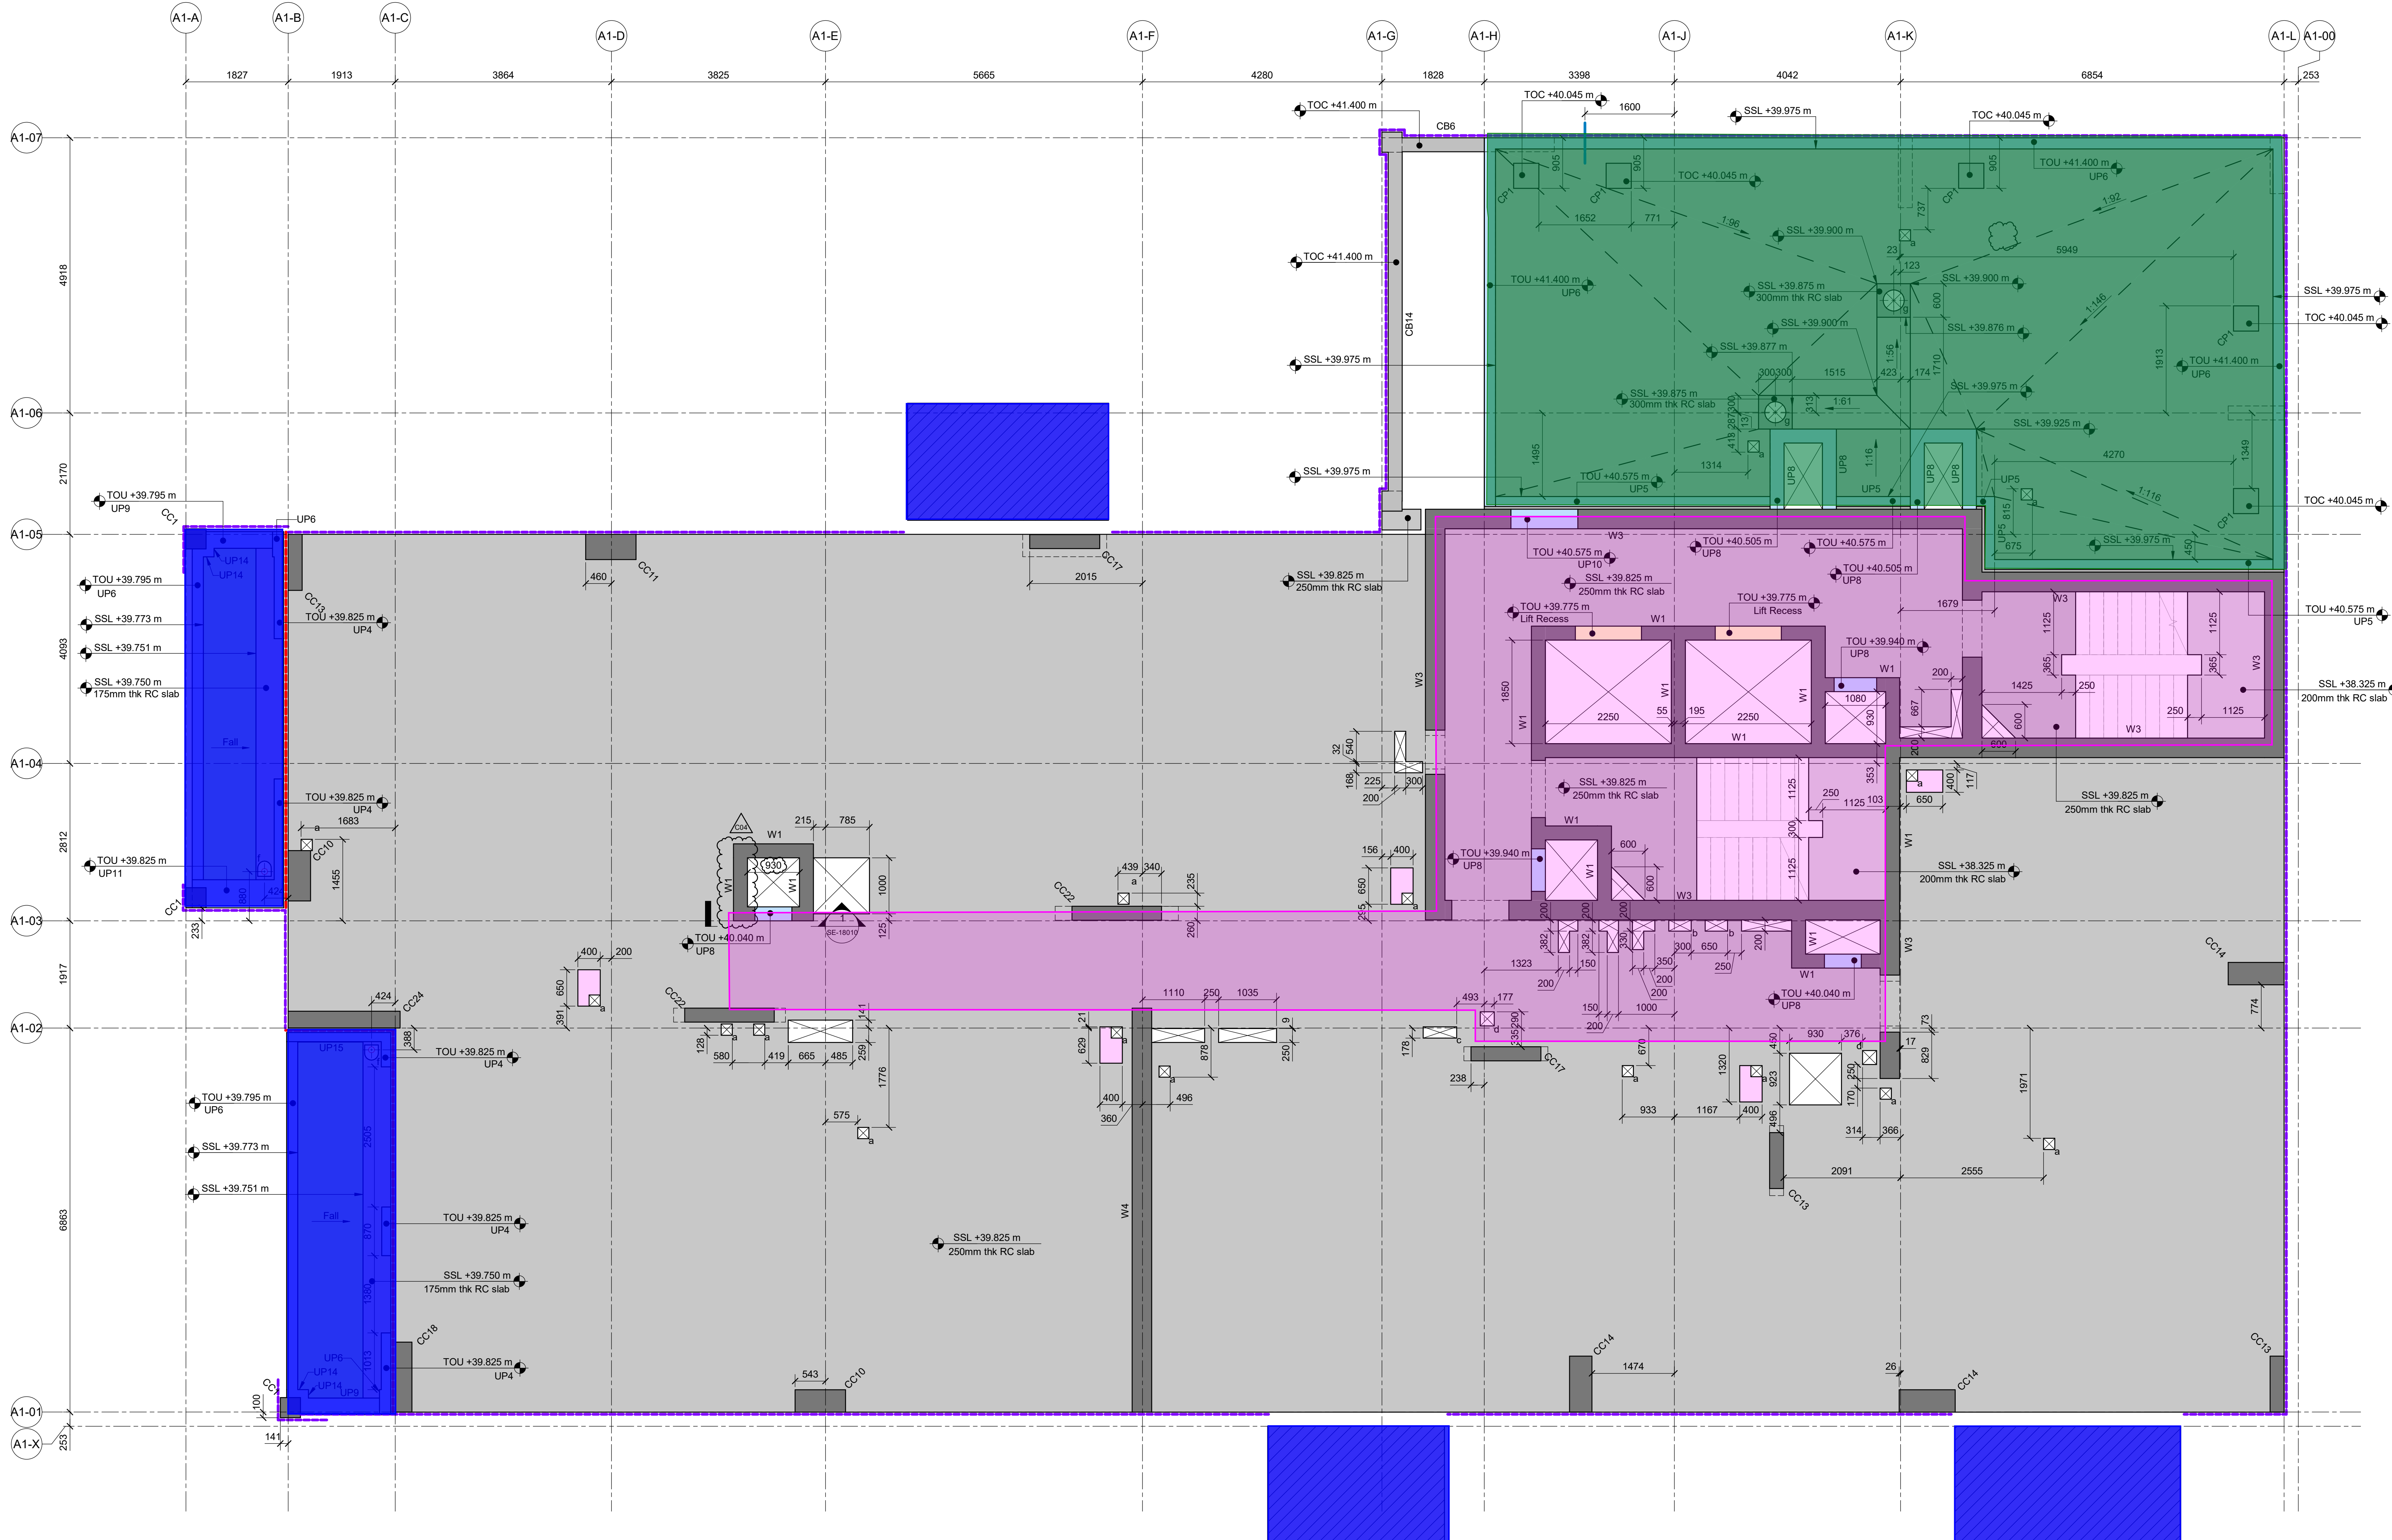

A1 - Level 11

Scale 1 : 50


C04	17/06/2025	Construction Issue
C03	29/05/2025	Construction Issue
C02	01/05/2025	Construction Issue
C01	05/02/2025	Construction Issue
P05	20/12/2024	Stage 4 Issue - For Comment
P04	11/07/2024	Preliminary Issue Drawing number update from H8656-ARU-A1-11-DR-SE-01112
P03	10/05/2024	Preliminary Issue
P02	26/10/2022	Suitable for Information
P01	11/10/2022	Suitable for Information
Issue	Date	

ARUP

1 West Regent Street
Glasgow G2 0RH
Tel +44(0)141 332 8534
www.arup.com


Client
Barratt East London

Project Title
Crown Wharf Canning Town

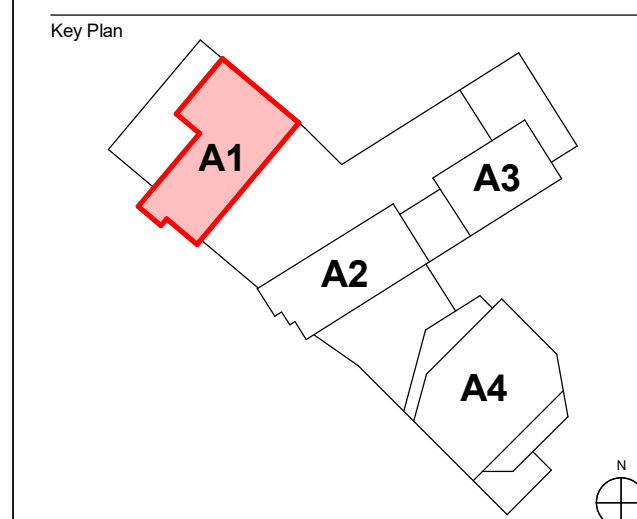

Drawing Title
Block A1
General Arrangement
Level 11

Scale of A0	As indicated	Dwg/Dwn/Check/Issued	KMA/ES/BS/GH
Role	Structural		
Status	S5 - Suitable For Stage Approval		
Appr Job No	288226-00	Rev	C04
Dr	H8656-ARU-A1-11-DR-SE-20112		

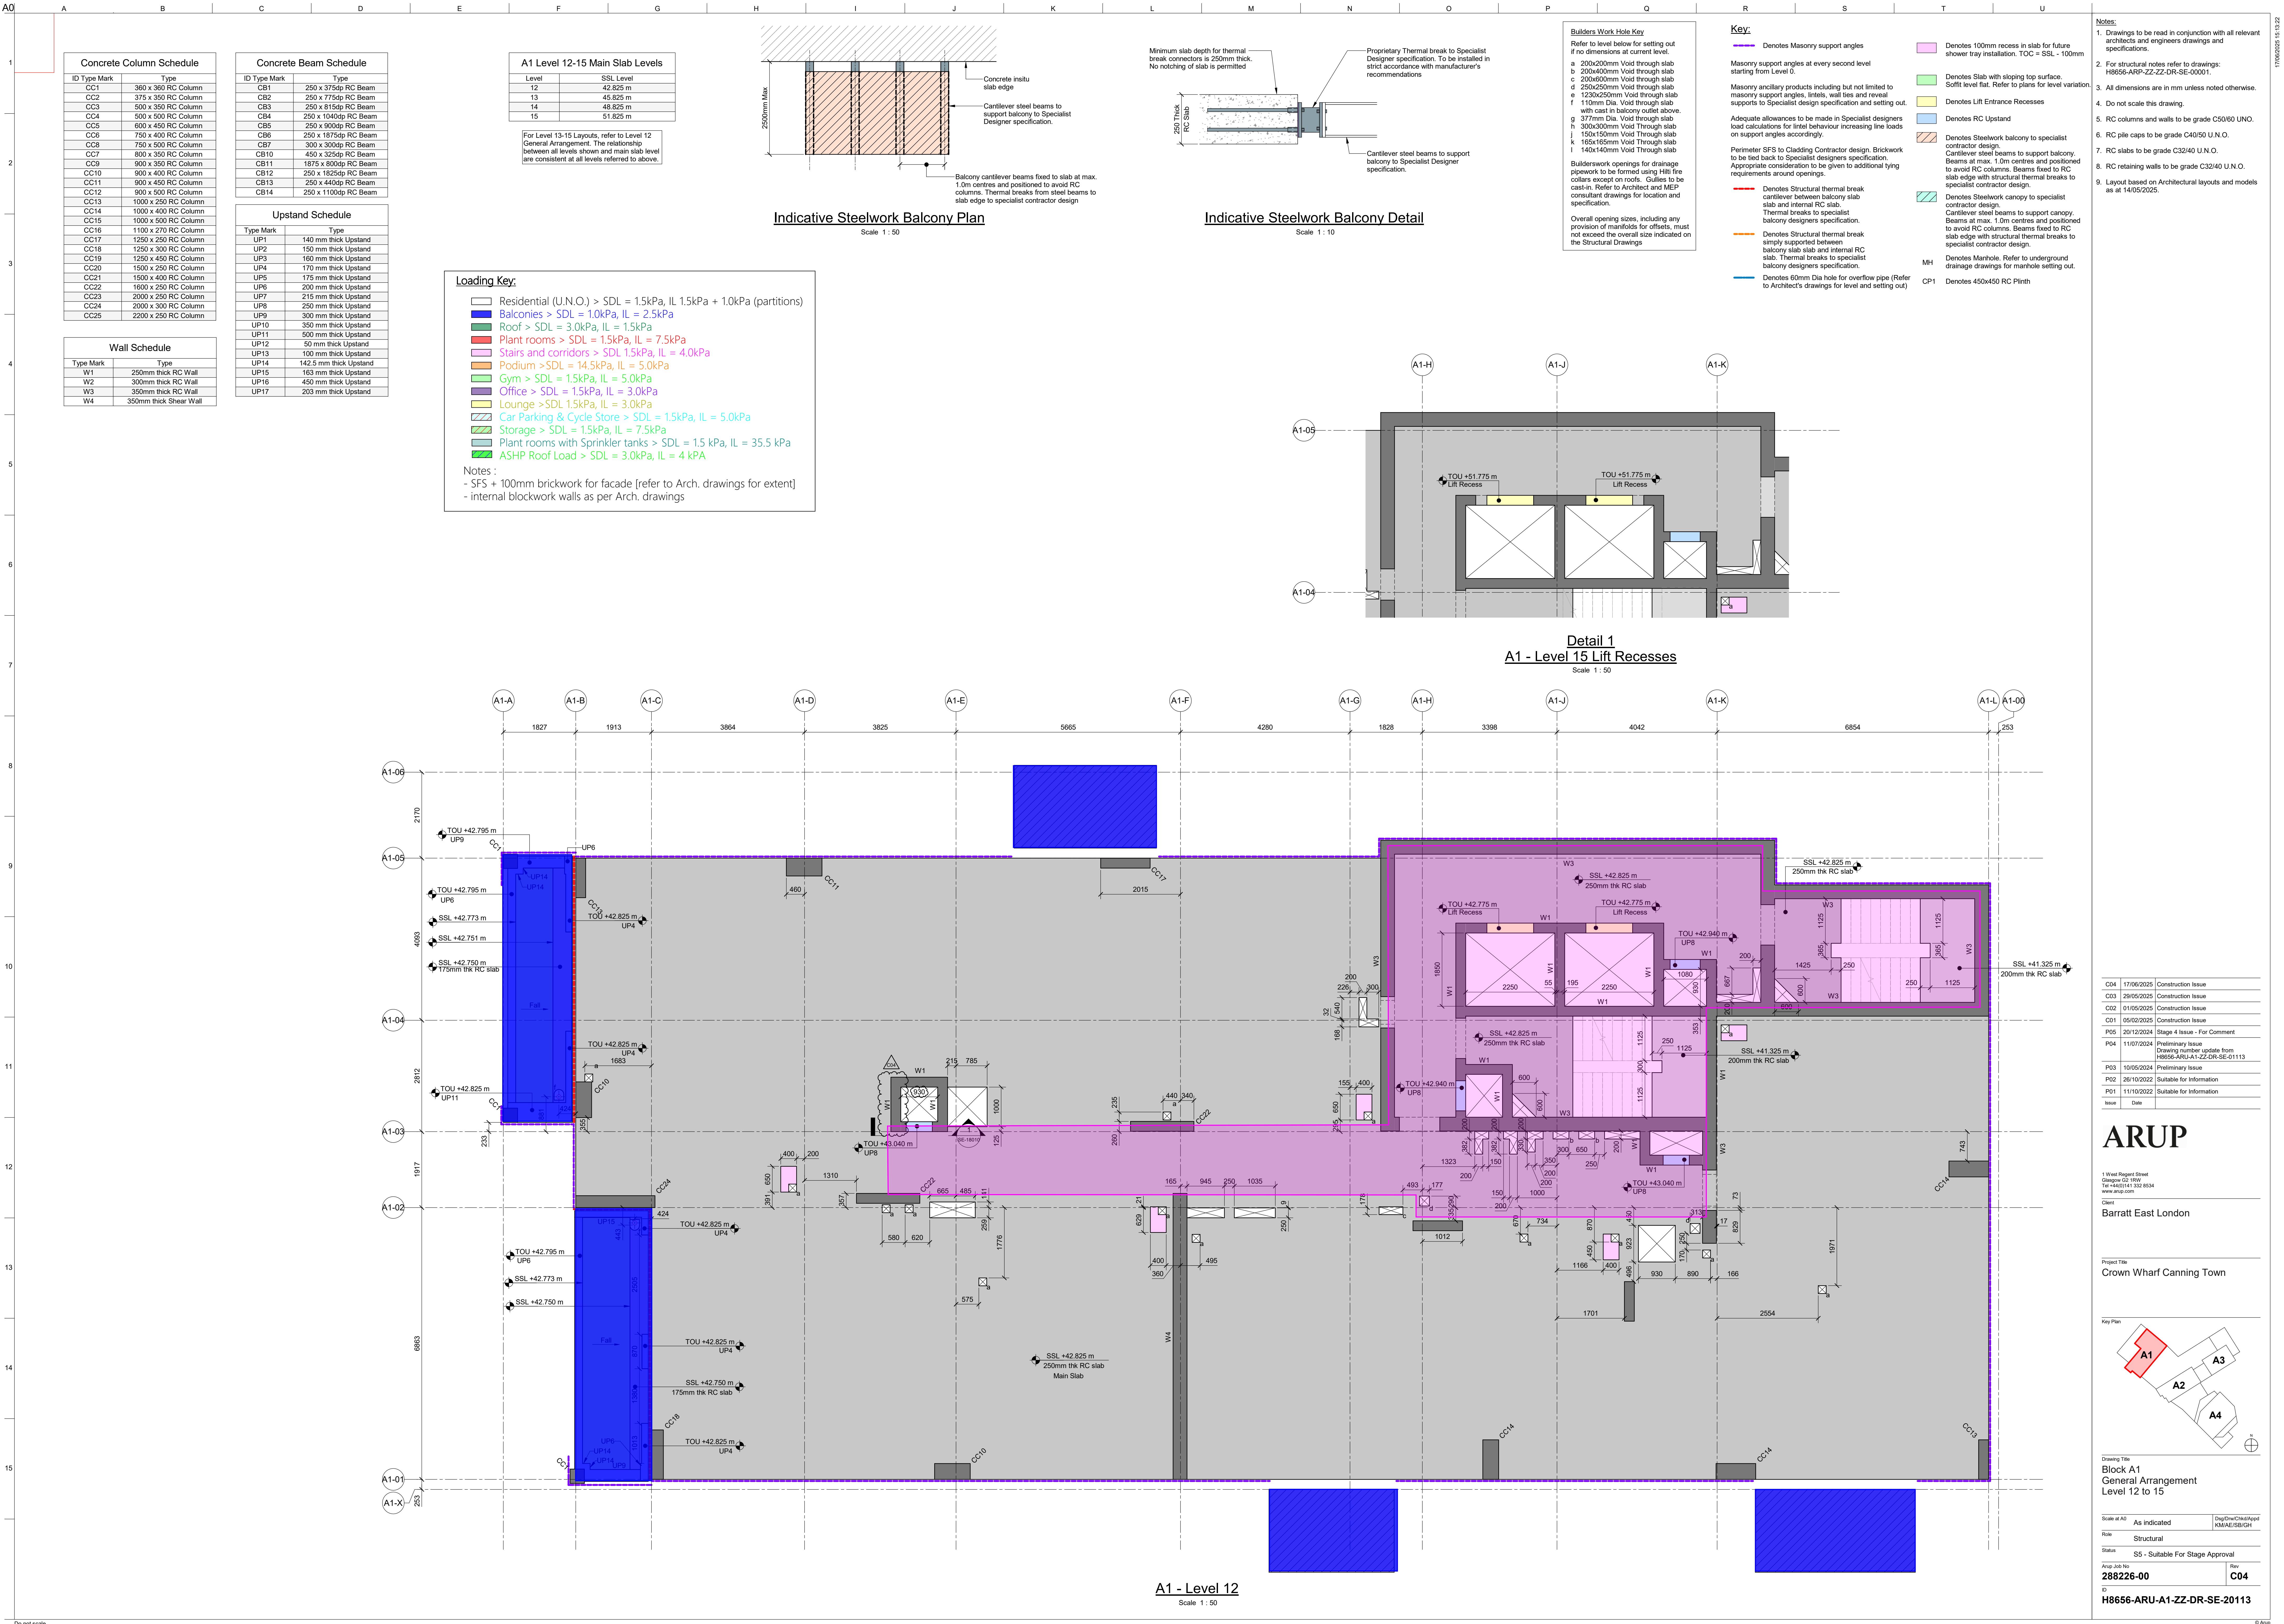


ARUP

1 West Regent Street
Glasgow G2 0RH
Tel +44(0)141 332 8534
www.arup.com

Client
Barratt East London


Project Title
Crown Wharf Canning Town

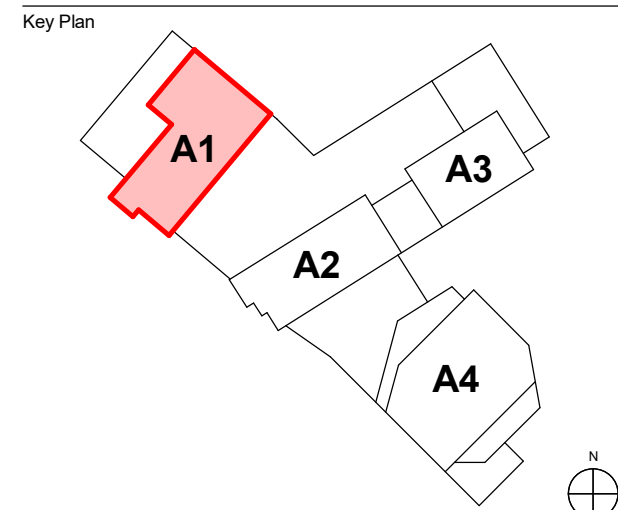


Drawing Title
Block A1
General Arrangement
Level 12 to 15

Scale of A0	As indicated	Dwg/Dwn/Check/Issued	KMA/ES/BS/GH
Role	Structural	Status	SS - Suitable For Stage Approval
Appr Job No	288226-00	Rev	C04
Dr	H8656-ARU-A1-ZZ-DR-SE-20113		

17/05/2025 15:13:22

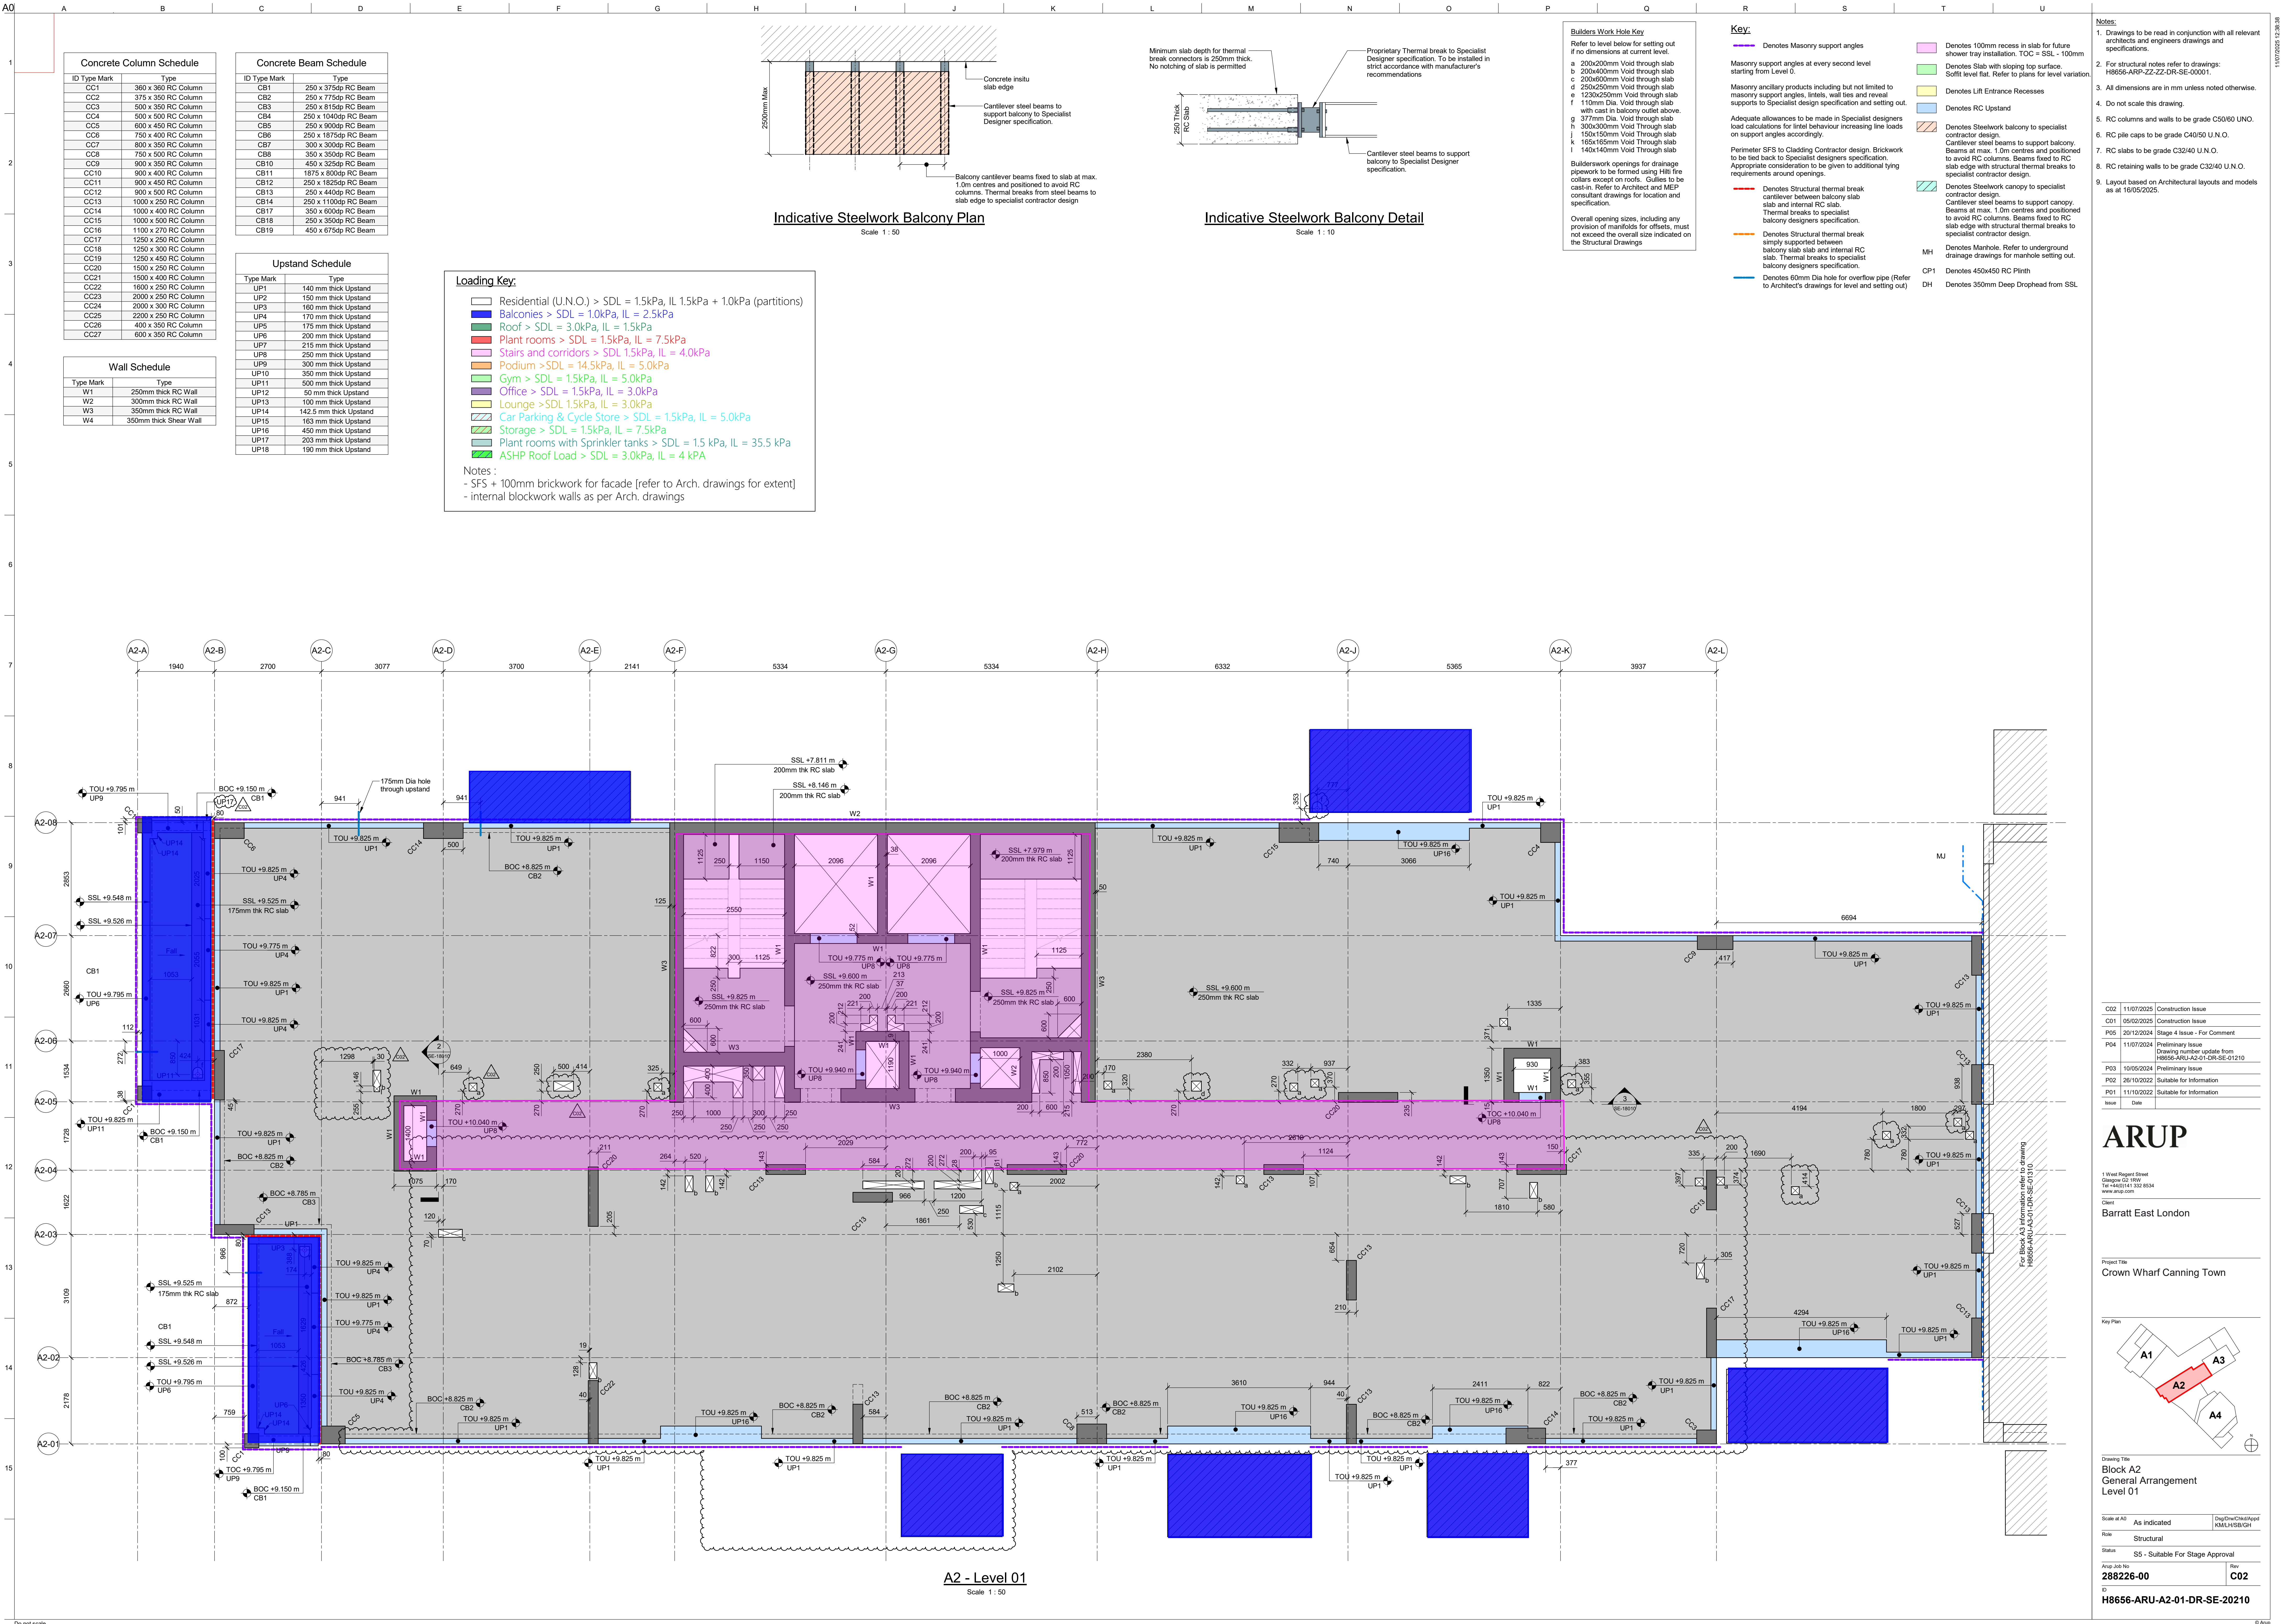

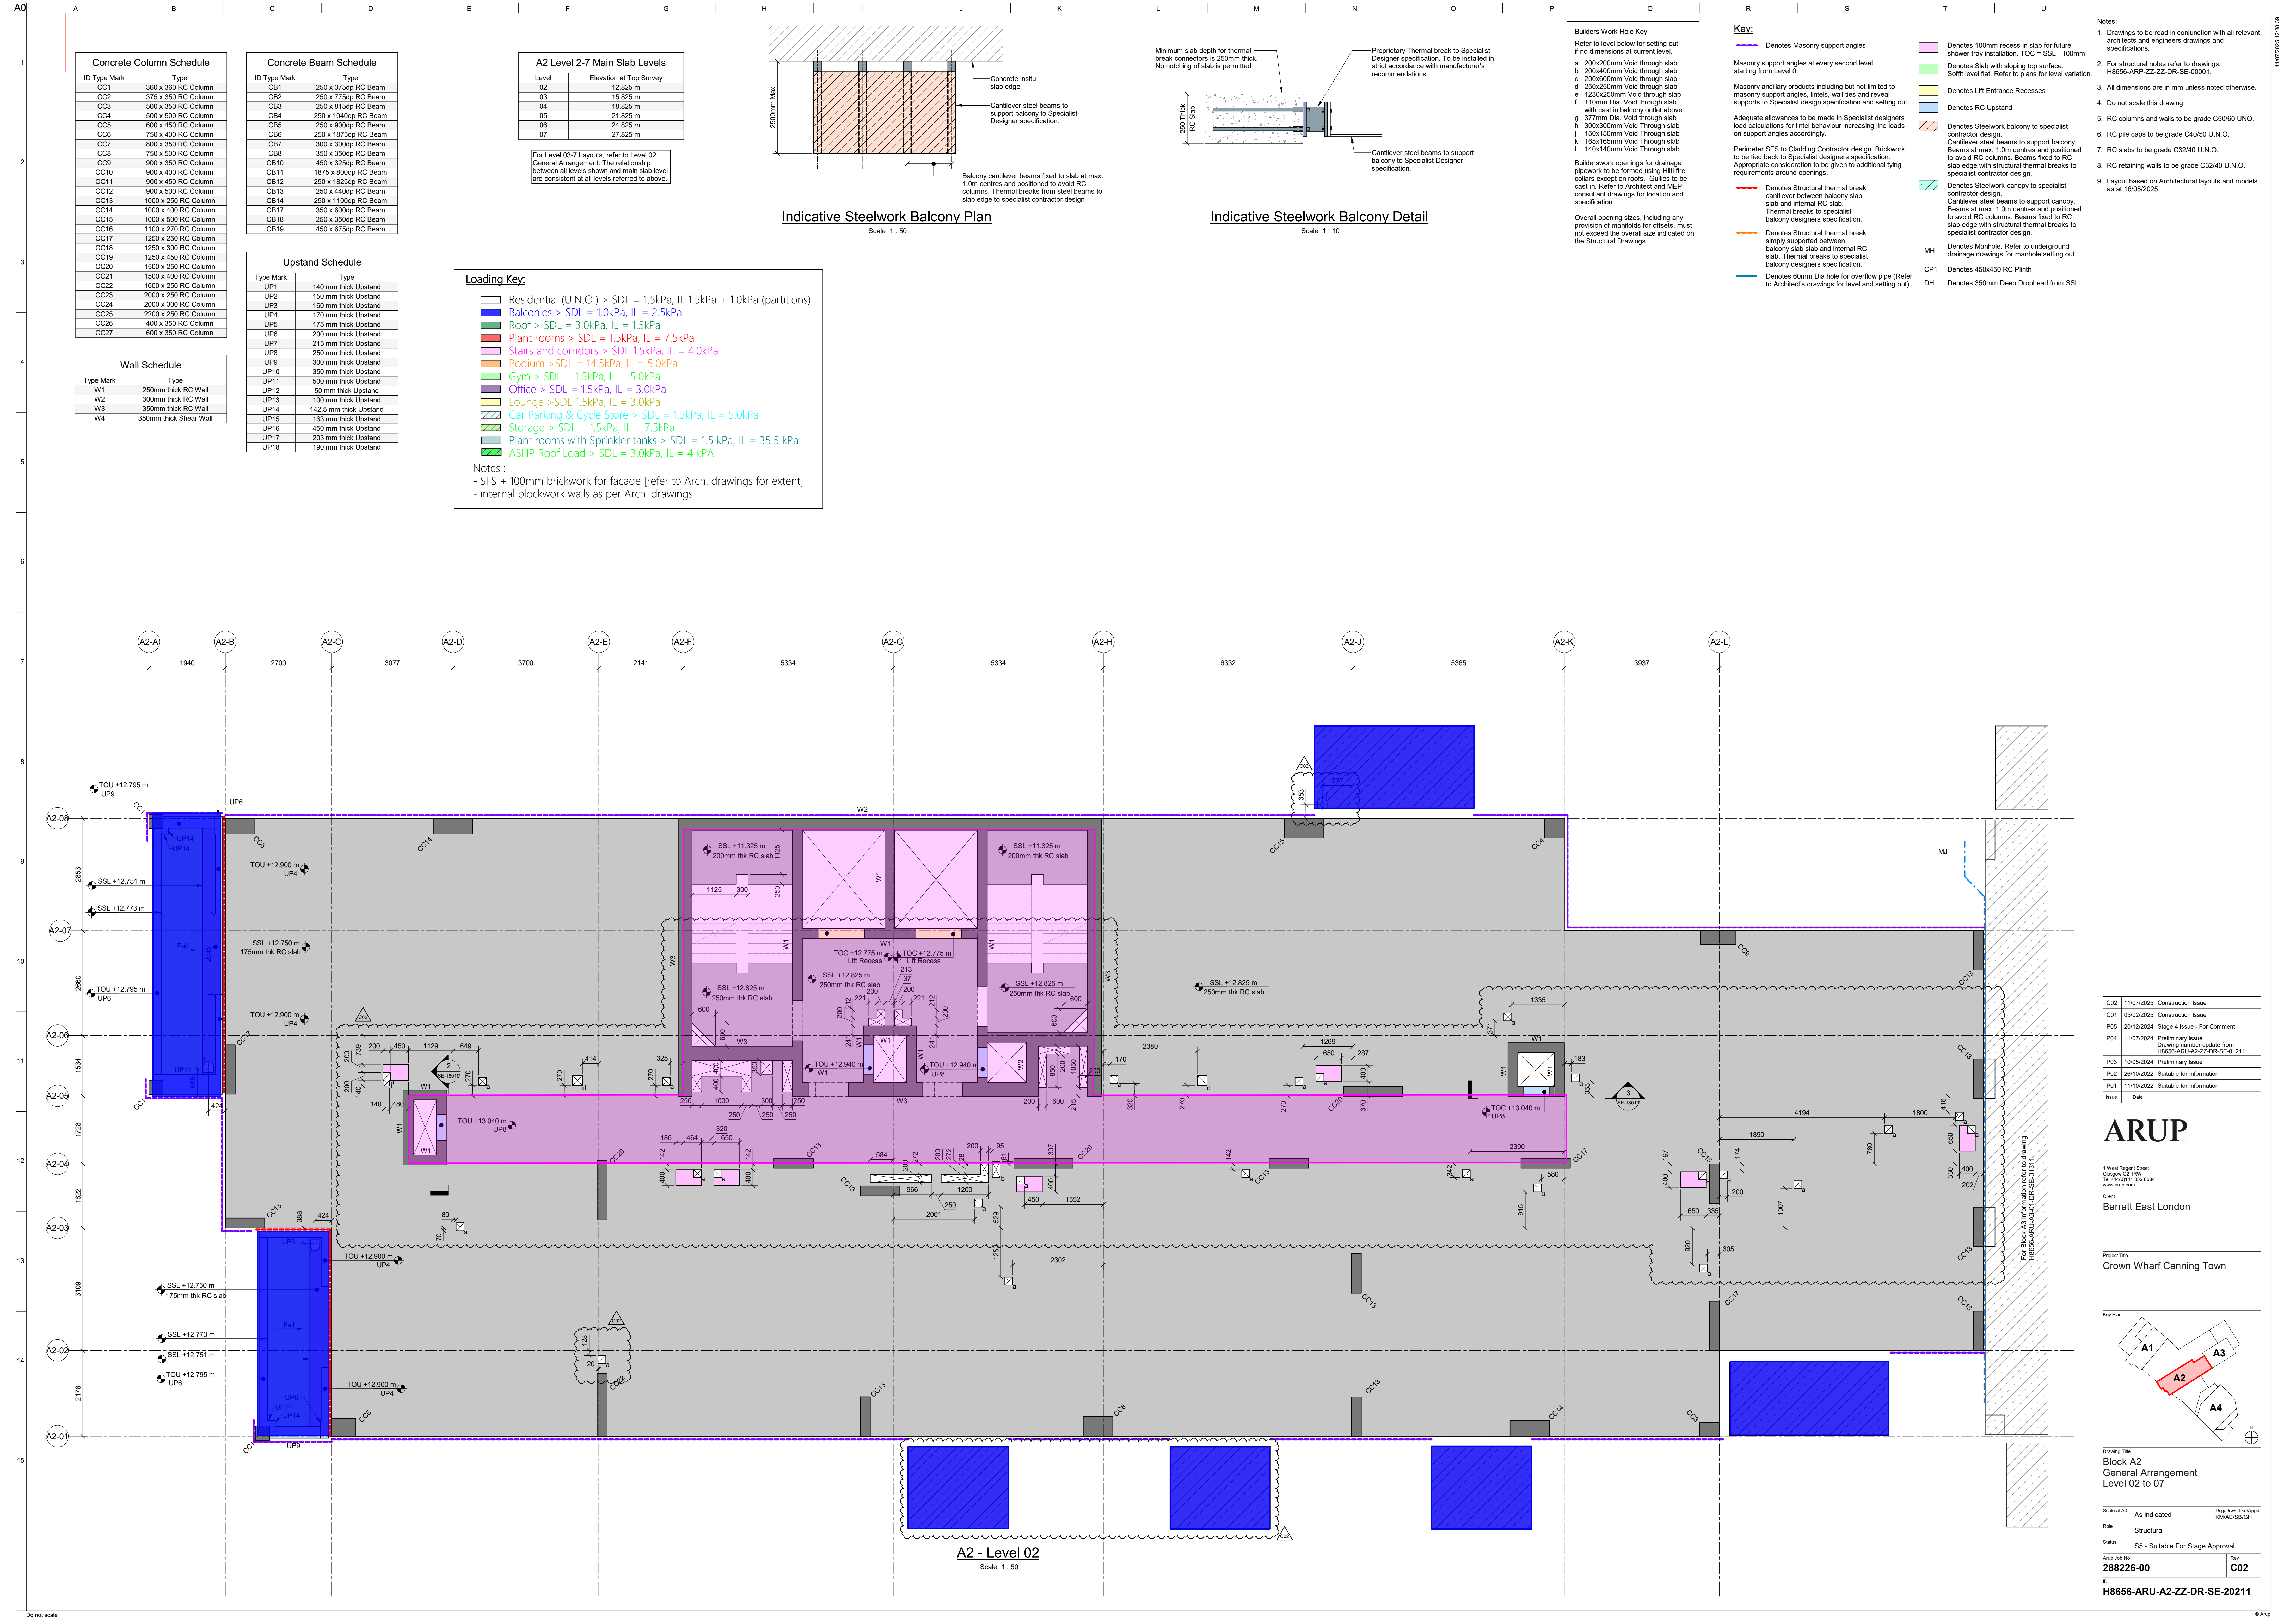

Concrete Column Schedule	
ID Type Mark	Type
CC1	360 x 360 RC Column
CC2	375 x 350 RC Column
CC3	500 x 350 RC Column
CC4	500 x 500 RC Column
CC5	600 x 450 RC Column
CC6	750 x 400 RC Column
CC7	800 x 350 RC Column
CC8	750 x 500 RC Column
CC9	900 x 350 RC Column
CC10	900 x 400 RC Column
CC11	900 x 450 RC Column
CC12	900 x 500 RC Column
CC13	1000 x 250 RC Column
CC14	1000 x 400 RC Column
CC15	1000 x 500 RC Column
CC16	1100 x 270 RC Column
CC17	1250 x 250 RC Column
CC18	1250 x 300 RC Column
CC19	1250 x 450 RC Column
CC20	1500 x 250 RC Column
CC21	1500 x 400 RC Column
CC22	1600 x 250 RC Column
CC23	2000 x 250 RC Column
CC24	2000 x 300 RC Column
CC25	2200 x 250 RC Column
CC26	400 x 350 RC Column
CC27	600 x 350 RC Column

Concrete Beam Schedule	
ID Type Mark	Type
CB1	250 x 375dp RC Beam
CB2	250 x 775dp RC Beam
CB3	250 x 815dp RC Beam
CB4	250 x 1040dp RC Beam
CB5	250 x 900dp RC Beam
CB6	250 x 1975dp RC Beam
CB7	300 x 300dp RC Beam
CB8	350 x 350dp RC Beam
CB10	450 x 325dp RC Beam
CB11	1875 x 800dp RC Beam
CB12	250 x 1825dp RC Beam
CB13	250 x 440dp RC Beam
CB14	250 x 1100dp RC Beam
CB17	350 x 600dp RC Beam
CB18	250 x 350dp RC Beam
CB19	450 x 675dp RC Beam

A2 Level 2-7 Main Slab Levels	
Level	Elevation at Top Survey
02	12.825 m
03	15.825 m
04	18.825 m
05	21.825 m
06	24.825 m
07	27.825 m

For Level 03-7 Layouts, refer to Level 02 General Arrangement. The relationship between all levels shown and main slab level are consistent at all levels referred to above.

Upstand Schedule	
Type Mark	Type
UP1	140 mm thick Upstand
UP2	150 mm thick Upstand
UP3	160 mm thick Upstand
UP4	170 mm thick Upstand
UP5	175 mm thick Upstand
UP6	200 mm thick Upstand
UP7	215 mm thick Upstand
UP8	250 mm thick Upstand
UP9	300 mm thick Upstand
UP10	350 mm thick Upstand
UP11	500 mm thick Upstand
UP12	50 mm thick Upstand
UP13	100 mm thick Upstand
UP14	142.5 mm thick Upstand
UP15	163 mm thick Upstand
UP16	450 mm thick Upstand
UP17	203 mm thick Upstand
UP18	190 mm thick Upstand


Wall Schedule	
Type Mark	Type
W1	250mm thick RC Wall
W2	300mm thick RC Wall
W3	350mm thick RC Wall
W4	350mm thick Shear Wall

- Loading Key:**
- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
 - Balconies > SDL = 1.0kPa, IL = 2.5kPa
 - Roof > SDL = 3.0kPa, IL = 1.5kPa
 - Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
 - Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
 - Podium >SDL = 14.5kPa, IL = 5.0kPa
 - Gym > SDL = 1.5kPa, IL = 5.0kPa
 - Office > SDL = 1.5kPa, IL = 3.0kPa
 - Lounge >SDL 1.5kPa, IL = 3.0kPa
 - Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
 - Storage > SDL = 1.5kPa, IL = 7.5kPa
 - Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
 - ASHP Roof Load > SDL = 3.0kPa, IL = 4 kPa

- Notes :
- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
 - Internal blockwork walls as per Arch. drawings

Indicative Steelwork Balcony Plan

Scale 1 : 50

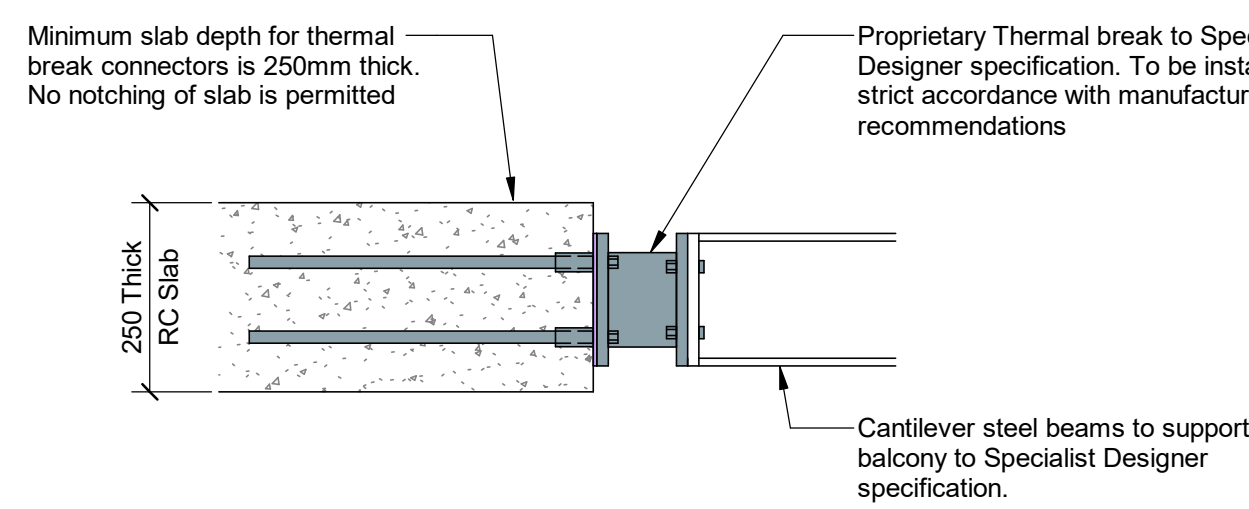

Indicative Steelwork Balcony Detail

Scale 1 : 10

Builders Work Hole Key
Refer to level below for setting out if no dimensions at current level.

- a 200x200mm Void through slab
- b 200x400mm Void through slab
- c 200x600mm Void through slab
- d 250x250mm Void through slab
- e 120x250mm Void through slab
- f 110mm Dia. Void through slab
- g 377mm Dia. Void through slab
- h 300x300mm Void Through slab
- j 150x150mm Void Through slab
- k 165x165mm Void Through slab
- l 140x140mm Void Through slab

Builderswork openings for drainage pipework to be formed using fill the collars except on roofs. Gullies to be cast-in. Refer to Architect and MEP consultant drawings for location and specification.

Overall opening sizes, including any provision of manifolds for offsets, must not exceed the overall size indicated on the Structural Drawings

- Key:**
- Denotes Masonry support angles
 - Masonry support angles at every second level starting from Level 0.
 - Masonry ancillary products including but not limited to masonry support angles, lintels, wall ties and reveal supports to Specialist design specification and setting out.
 - Adequate allowances to be made in Specialist designers load calculations for lintel behaviour increasing line loads on support angles accordingly.
 - Perimeter SFS to Cladding Contractor design. Brickwork to be test back to Specialist designers specification.
 - Appropriate consideration to be given to additional tying requirements around openings.
 - Denotes Structural thermal break cantilever between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
 - Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
 - Denotes 60mm Dia hole for overflow pipe (Refer to Architect's drawings for level and setting out)
 - Denotes 100mm recess in slab for future shower tray installation. TOC = SSL - 100mm
 - Denotes Slab with sloping top surface. Soffit level flat. Refer to plans for level variation
 - Denotes Lift Entrance Recesses
 - Denotes RC Upstand
 - Denotes Steelwork balcony to specialist contractor design.
 - Cantilever steel beams to support balcony. Beams at max. 1.0m centres and positioned to avoid RC columns. Beams fixed to RC slab edge with structural thermal breaks to specialist contractor design.
 - Denotes Steelwork canopy to specialist contractor design.
 - Cantilever steel beams to support canopy. Beams at max. 1.0m centres and positioned to avoid RC columns. Beams fixed to RC slab edge with structural thermal breaks to specialist contractor design.
 - Denotes Manhole. Refer to underground drainage drawings for manhole setting out.
 - CP1 Denotes 450x450 RC Plinth
 - DH Denotes 350mm Deep Drophead from SSL

- Notes:**
- Drawings to be read in conjunction with all relevant architects and engineers drawings and specifications.
 - For structural notes refer to drawings: H8656-ARU-ZZ-ZZ-DR-SE-00001.
 - All dimensions are in mm unless noted otherwise.
 - Do not scale this drawing.
 - RC columns and walls to be grade C50/60 U.N.O.
 - RC pile caps to be grade C40/50 U.N.O.
 - RC slabs to be grade C32/40 U.N.O.
 - RC retaining walls to be grade C32/40 U.N.O.
 - Layout based on Architectural layouts and models as at 16/05/2025.


CO2	11/07/2025	Construction Issue
CO1	05/02/2025	Construction Issue
P05	20/12/2024	Stage 4 Issue - For Comment
P04	11/07/2024	Preliminary Issue
P03	10/05/2024	Preliminary Issue
P02	26/10/2022	Suitable for Information
P01	11/10/2022	Suitable for Information
Issue	Date	

ARUP

1 West Regent Street
Glasgow G2 0RH
Tel +44(0)141 332 8534
www.arup.com


Client
Barratt East London

Project Title
Crown Wharf Canning Town

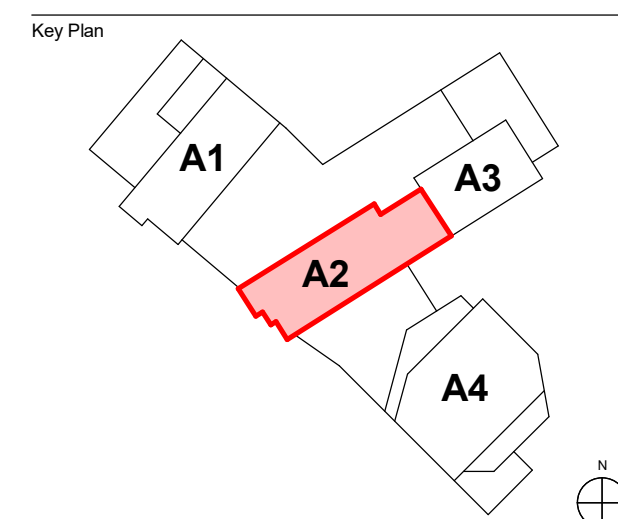

Drawing Title
Block A2
General Arrangement
Level 02 to 07

Scale at A0	As indicated	Dwg/Dwn/Check/Issued
Role	Structural	KMA/ES/SGH
Status	S5 - Suitable For Stage Approval	
Appr Job No	288226-00	Rev
Rev	C02	
Dr	H8656-ARU-A2-ZZ-DR-SE-20211	

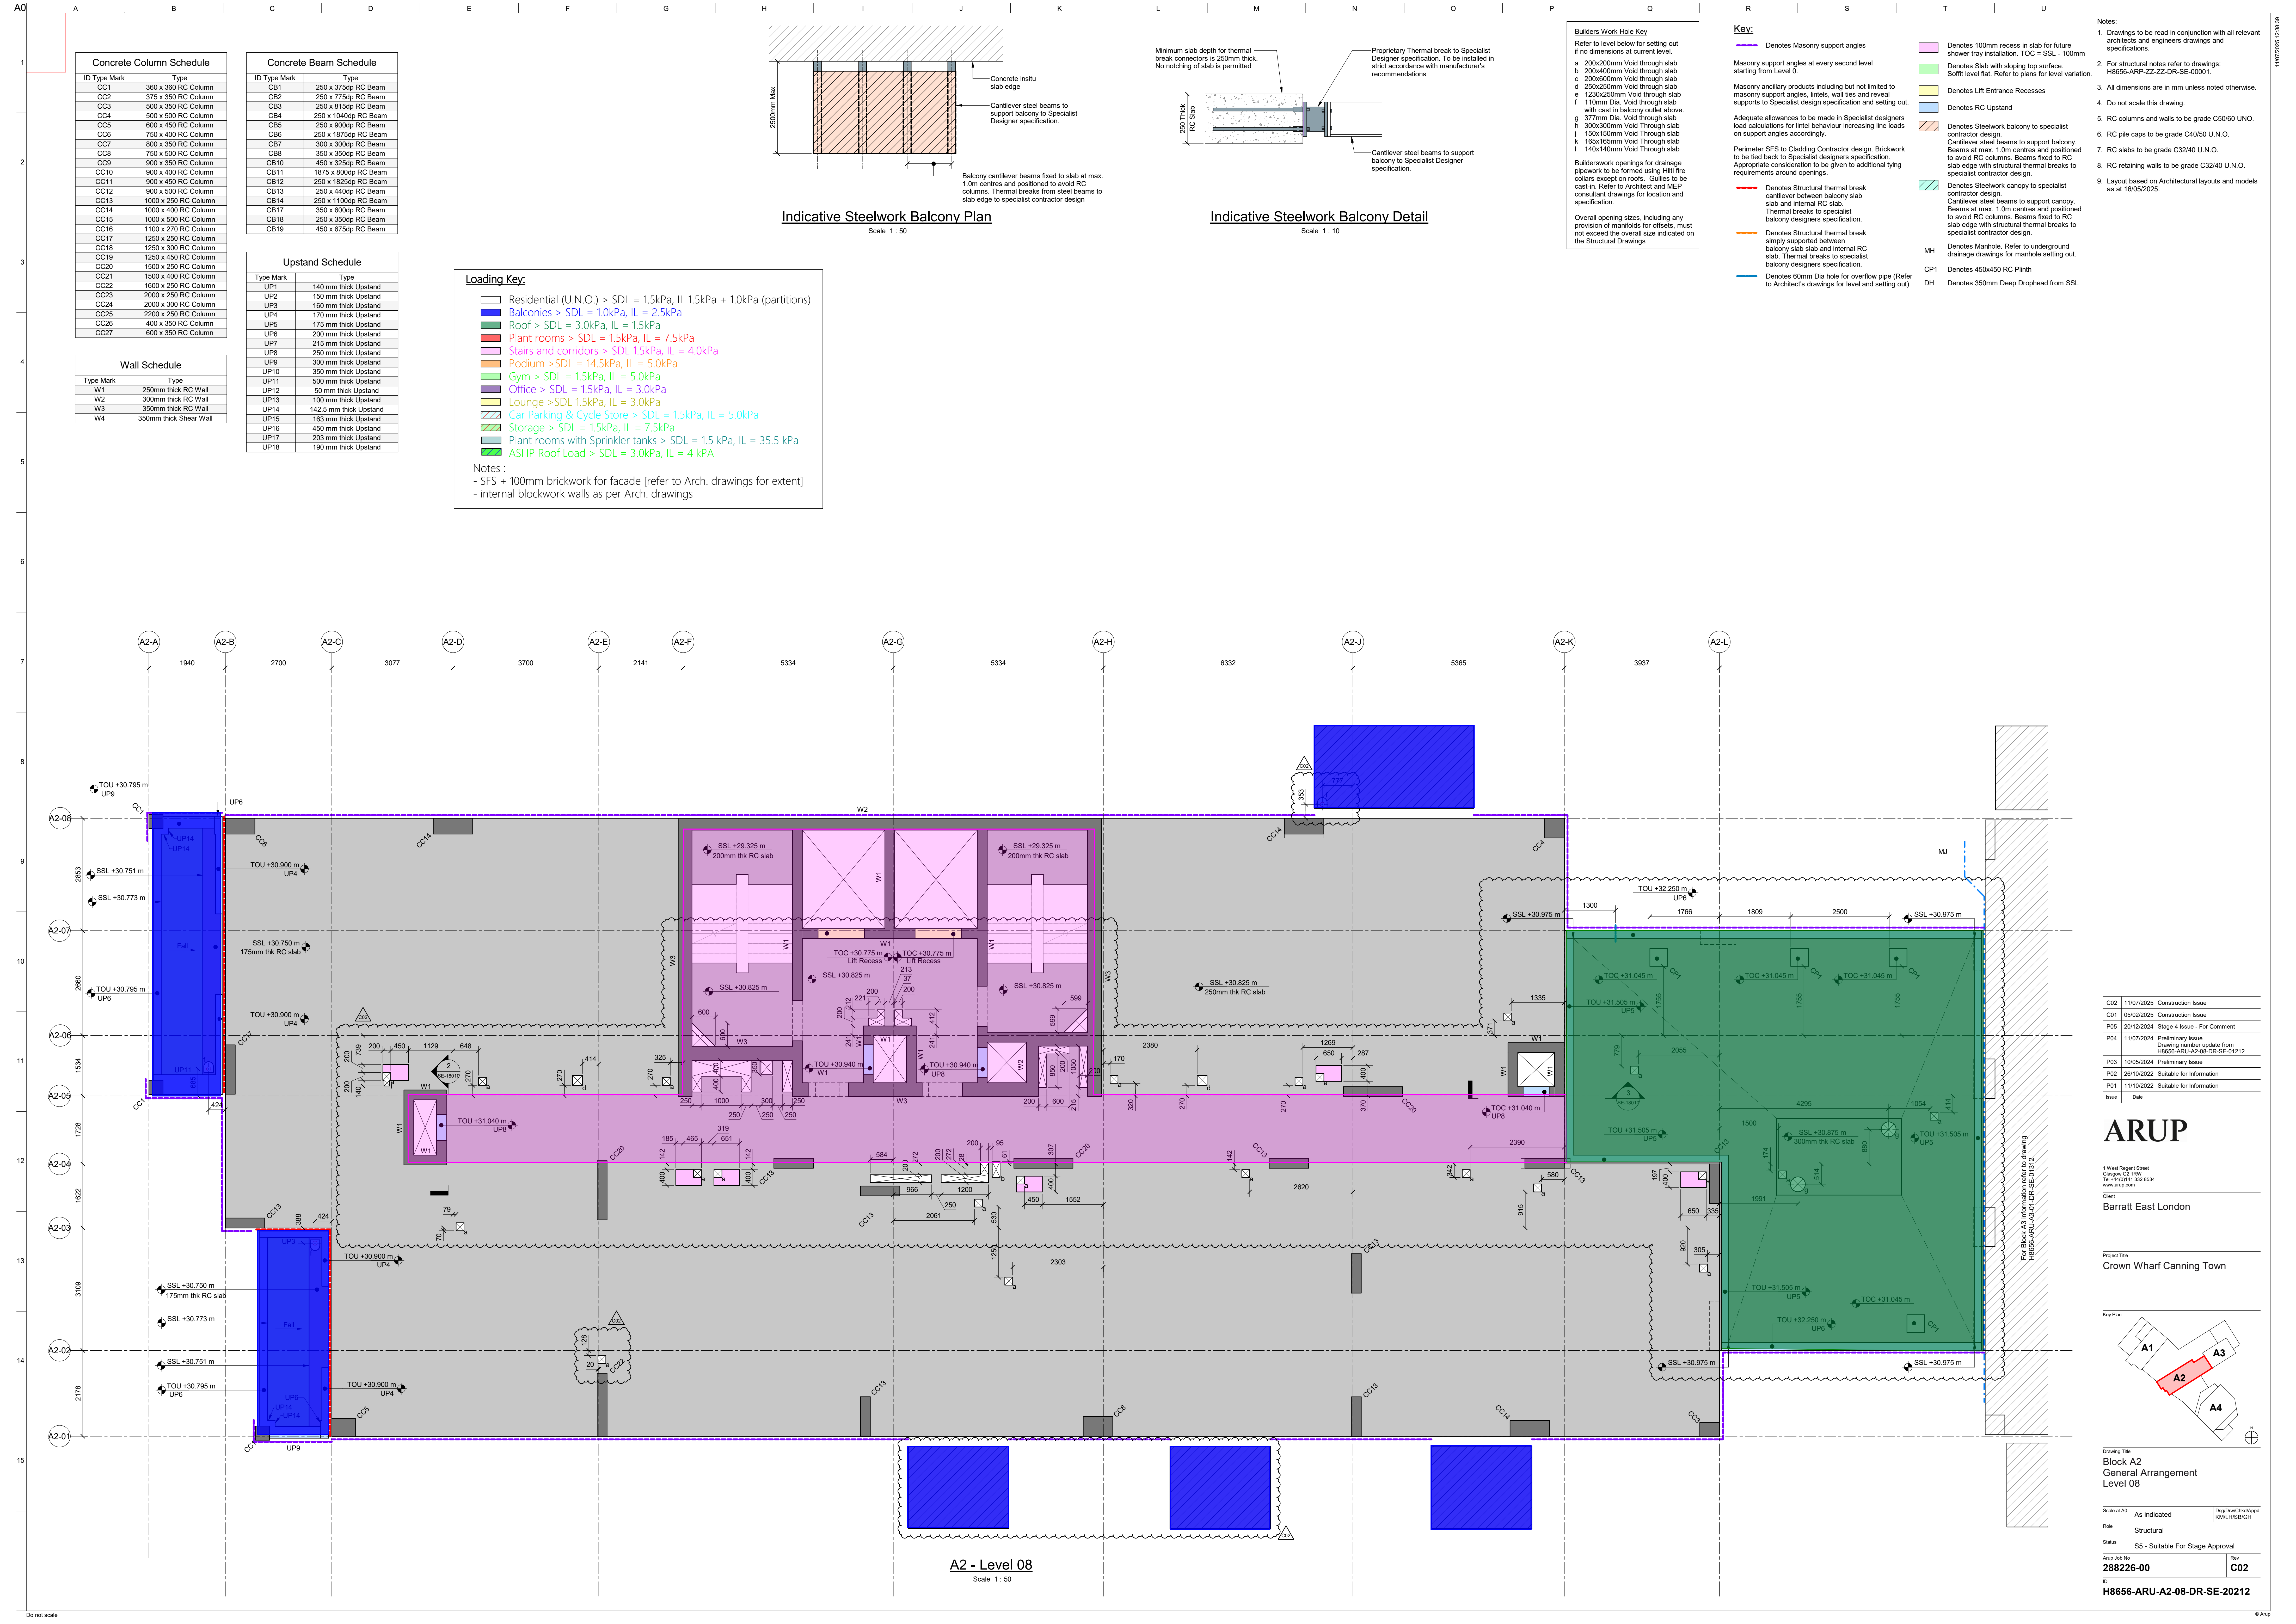

Concrete Column Schedule	
ID Type Mark	Type
CC1	360 x 360 RC Column
CC2	375 x 350 RC Column
CC3	500 x 350 RC Column
CC4	500 x 500 RC Column
CC5	600 x 450 RC Column
CC6	750 x 400 RC Column
CC7	800 x 350 RC Column
CC8	750 x 500 RC Column
CC9	900 x 350 RC Column
CC10	900 x 400 RC Column
CC11	900 x 450 RC Column
CC12	900 x 500 RC Column
CC13	1000 x 250 RC Column
CC14	1000 x 400 RC Column
CC15	1000 x 500 RC Column
CC16	1100 x 270 RC Column
CC17	1250 x 250 RC Column
CC18	1250 x 300 RC Column
CC19	1250 x 450 RC Column
CC20	1500 x 250 RC Column
CC21	1500 x 400 RC Column
CC22	1600 x 250 RC Column
CC23	2000 x 250 RC Column
CC24	2000 x 300 RC Column
CC25	2200 x 250 RC Column
CC26	400 x 350 RC Column
CC27	600 x 350 RC Column

Concrete Beam Schedule	
ID Type Mark	Type
CB1	250 x 375dp RC Beam
CB2	250 x 775dp RC Beam
CB3	250 x 815dp RC Beam
CB4	250 x 1040dp RC Beam
CB5	250 x 900dp RC Beam
CB6	250 x 1975dp RC Beam
CB7	300 x 300dp RC Beam
CB8	350 x 350dp RC Beam
CB10	450 x 325dp RC Beam
CB11	1875 x 800dp RC Beam
CB12	250 x 1825dp RC Beam
CB13	250 x 440dp RC Beam
CB14	250 x 1100dp RC Beam
CB17	350 x 600dp RC Beam
CB18	250 x 350dp RC Beam
CB19	450 x 675dp RC Beam

Upstand Schedule	
Type Mark	Type
UP1	140 mm thick Upstand
UP2	150 mm thick Upstand
UP3	160 mm thick Upstand
UP4	170 mm thick Upstand
UP5	175 mm thick Upstand
UP6	200 mm thick Upstand
UP7	215 mm thick Upstand
UP8	250 mm thick Upstand
UP9	300 mm thick Upstand
UP10	350 mm thick Upstand
UP11	500 mm thick Upstand
UP12	50 mm thick Upstand
UP13	100 mm thick Upstand
UP14	142.5 mm thick Upstand
UP15	163 mm thick Upstand
UP16	450 mm thick Upstand
UP17	203 mm thick Upstand
UP18	190 mm thick Upstand

Wall Schedule	
Type Mark	Type
W1	250mm thick RC Wall
W2	300mm thick RC Wall
W3	350mm thick RC Wall
W4	350mm thick Shear Wall

Loading Key:


- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
- Balconies > SDL = 1.0kPa, IL = 2.5kPa
- Roof > SDL = 3.0kPa, IL = 1.5kPa
- Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
- Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
- Podium >SDL = 14.5kPa, IL = 5.0kPa
- Gym > SDL = 1.5kPa, IL = 5.0kPa
- Office > SDL = 1.5kPa, IL = 3.0kPa
- Lounge >SDL 1.5kPa, IL = 3.0kPa
- Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
- Storage > SDL = 1.5kPa, IL = 7.5kPa
- Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
- ASHP Roof Load > SDL = 3.0kPa, IL = 4 kPa

Notes :

- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
- Internal blockwork walls as per Arch. drawings

Indicative Steelwork Balcony Plan

Scale 1 : 50

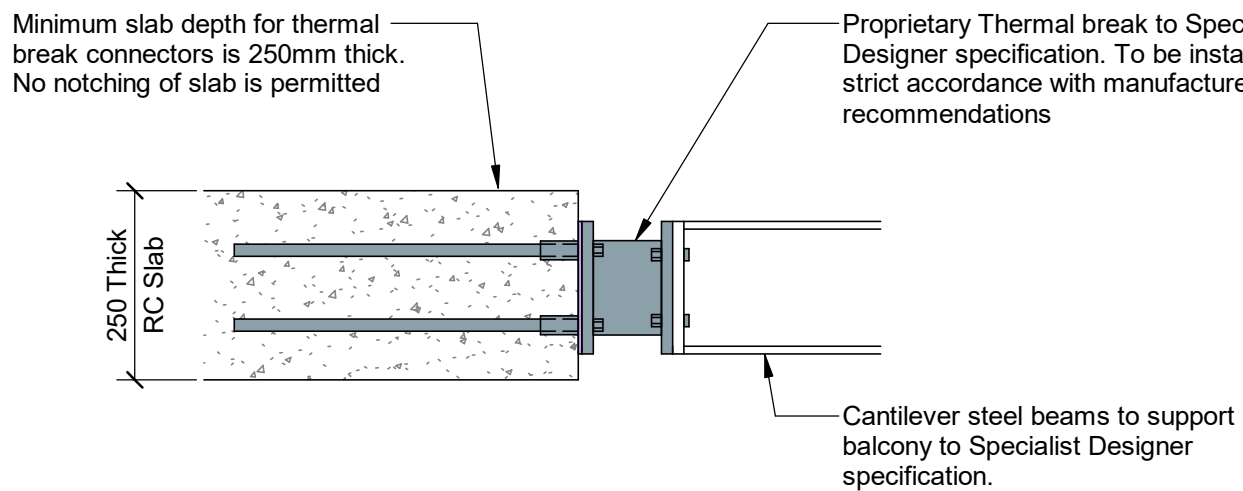

Indicative Steelwork Balcony Detail

Scale 1 : 10

Builders Work Hole Key
Refer to level below for setting out if no dimensions at current level.

- a 200x200mm Void through slab
- b 200x400mm Void through slab
- c 200x600mm Void through slab
- d 250x250mm Void through slab
- e 120x250mm Void through slab
- f 110mm Dia. Void through slab
- g 377mm Dia. Void through slab
- h 300x300mm Void Through slab
- j 150x150mm Void Through slab
- k 165x165mm Void Through slab
- l 140x140mm Void Through slab

Builderswork openings for drainage pipework to be formed using fill the collars except on roofs. Gullies to be cast-in. Refer to Architect and MEP consultant drawings for location and specification.

Overall opening sizes, including any provision of manifolds for offsets, must not exceed the overall size indicated on the Structural Drawings

Key:

- Denotes Masonry support angles
- Masonry support angles at every second level starting from Level 0.
- Masonry ancillary products including but not limited to masonry support angles, lintels, wall ties and reveal supports to Specialist design specification and setting out.
- Adequate allowances to be made in Specialist designers load calculations for lintel behaviour increasing line loads on support angles accordingly.
- Perimeter SFS to Cladding Contractor design. Brickwork to be tied back to Specialist designers specification. Appropriate consideration to be given to additional tying requirements around openings.
- Denotes Structural thermal break cantilever between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
- Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
- Denotes 60mm Dia hole for overflow pipe (Refer to Architect's drawings for level and setting out)
- Denotes 100mm recess in slab for future shower tray installation. TOC = SSL - 100mm
- Denotes Slab with sloping top surface. Soffit level flat. Refer to plans for level variation
- Denotes Lift Entrance Recesses
- Denotes RC Upstand
- Denotes Steelwork balcony to specialist contractor design. Cantilever steel beams to support balcony. Beams at max. 1.0m centres and positioned to avoid RC columns. Beams fixed to RC slab edge with structural thermal breaks to specialist contractor design.
- Denotes Steelwork canopy to specialist contractor design. Cantilever steel beams to support canopy. Beams at max. 1.0m centres and positioned to avoid RC columns. Beams fixed to RC slab edge with structural thermal breaks to specialist contractor design.
- Denotes Manhole. Refer to underground drainage drawings for manhole setting out.
- CP1 Denotes 450x450 RC Plinth
- DH Denotes 350mm Deep Drophead from SSL

- Notes:**
- Drawings to be read in conjunction with all relevant architects and engineers drawings and specifications.
 - For structural notes refer to drawings: H8656-ARP-ZZ-DR-SE-00001.
 - All dimensions are in mm unless noted otherwise.
 - Do not scale this drawing.
 - RC columns and walls to be grade C50/60 U.N.O.
 - RC pile caps to be grade C40/50 U.N.O.
 - RC slabs to be grade C32/40 U.N.O.
 - RC retaining walls to be grade C32/40 U.N.O.
 - Layout based on Architectural layouts and models as at 16/05/2025.


C02	11/07/2025	Construction Issue
C01	05/02/2025	Construction Issue
P05	20/12/2024	Stage 4 Issue - For Comment
P04	11/07/2024	Preliminary Issue
P03	10/05/2024	Preliminary Issue
P02	26/10/2022	Suitable for Information
P01	11/10/2022	Suitable for Information
Issue	Date	

ARUP

1 West Regent Street
Glasgow G2 0RH
Tel +44(0)141 332 8534
www.arup.com


Client
Barratt East London

Project Title
Crown Wharf Canning Town

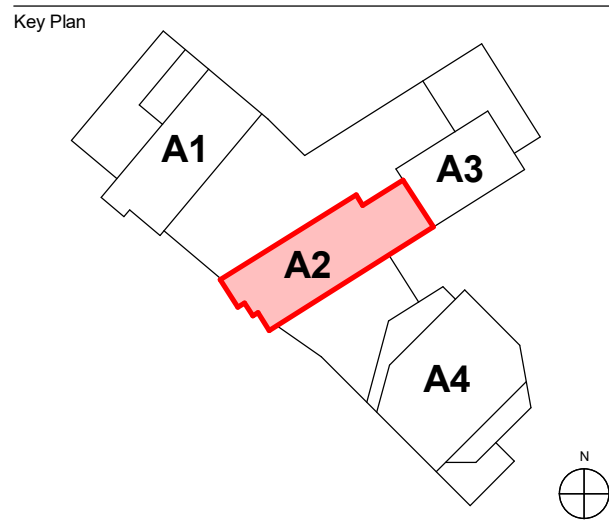

Drawing Title
Block A2
General Arrangement
Level 08

Scale of A0	As indicated	Dwg/Dw/Checked/Approved	KMLH/BSB/GH
Role	Structural		
Status	S5 - Suitable For Stage Approval		
Appr Job No	288226-00	Rev	C02
By	H8656-ARU-A2-08-DR-SE-20212		

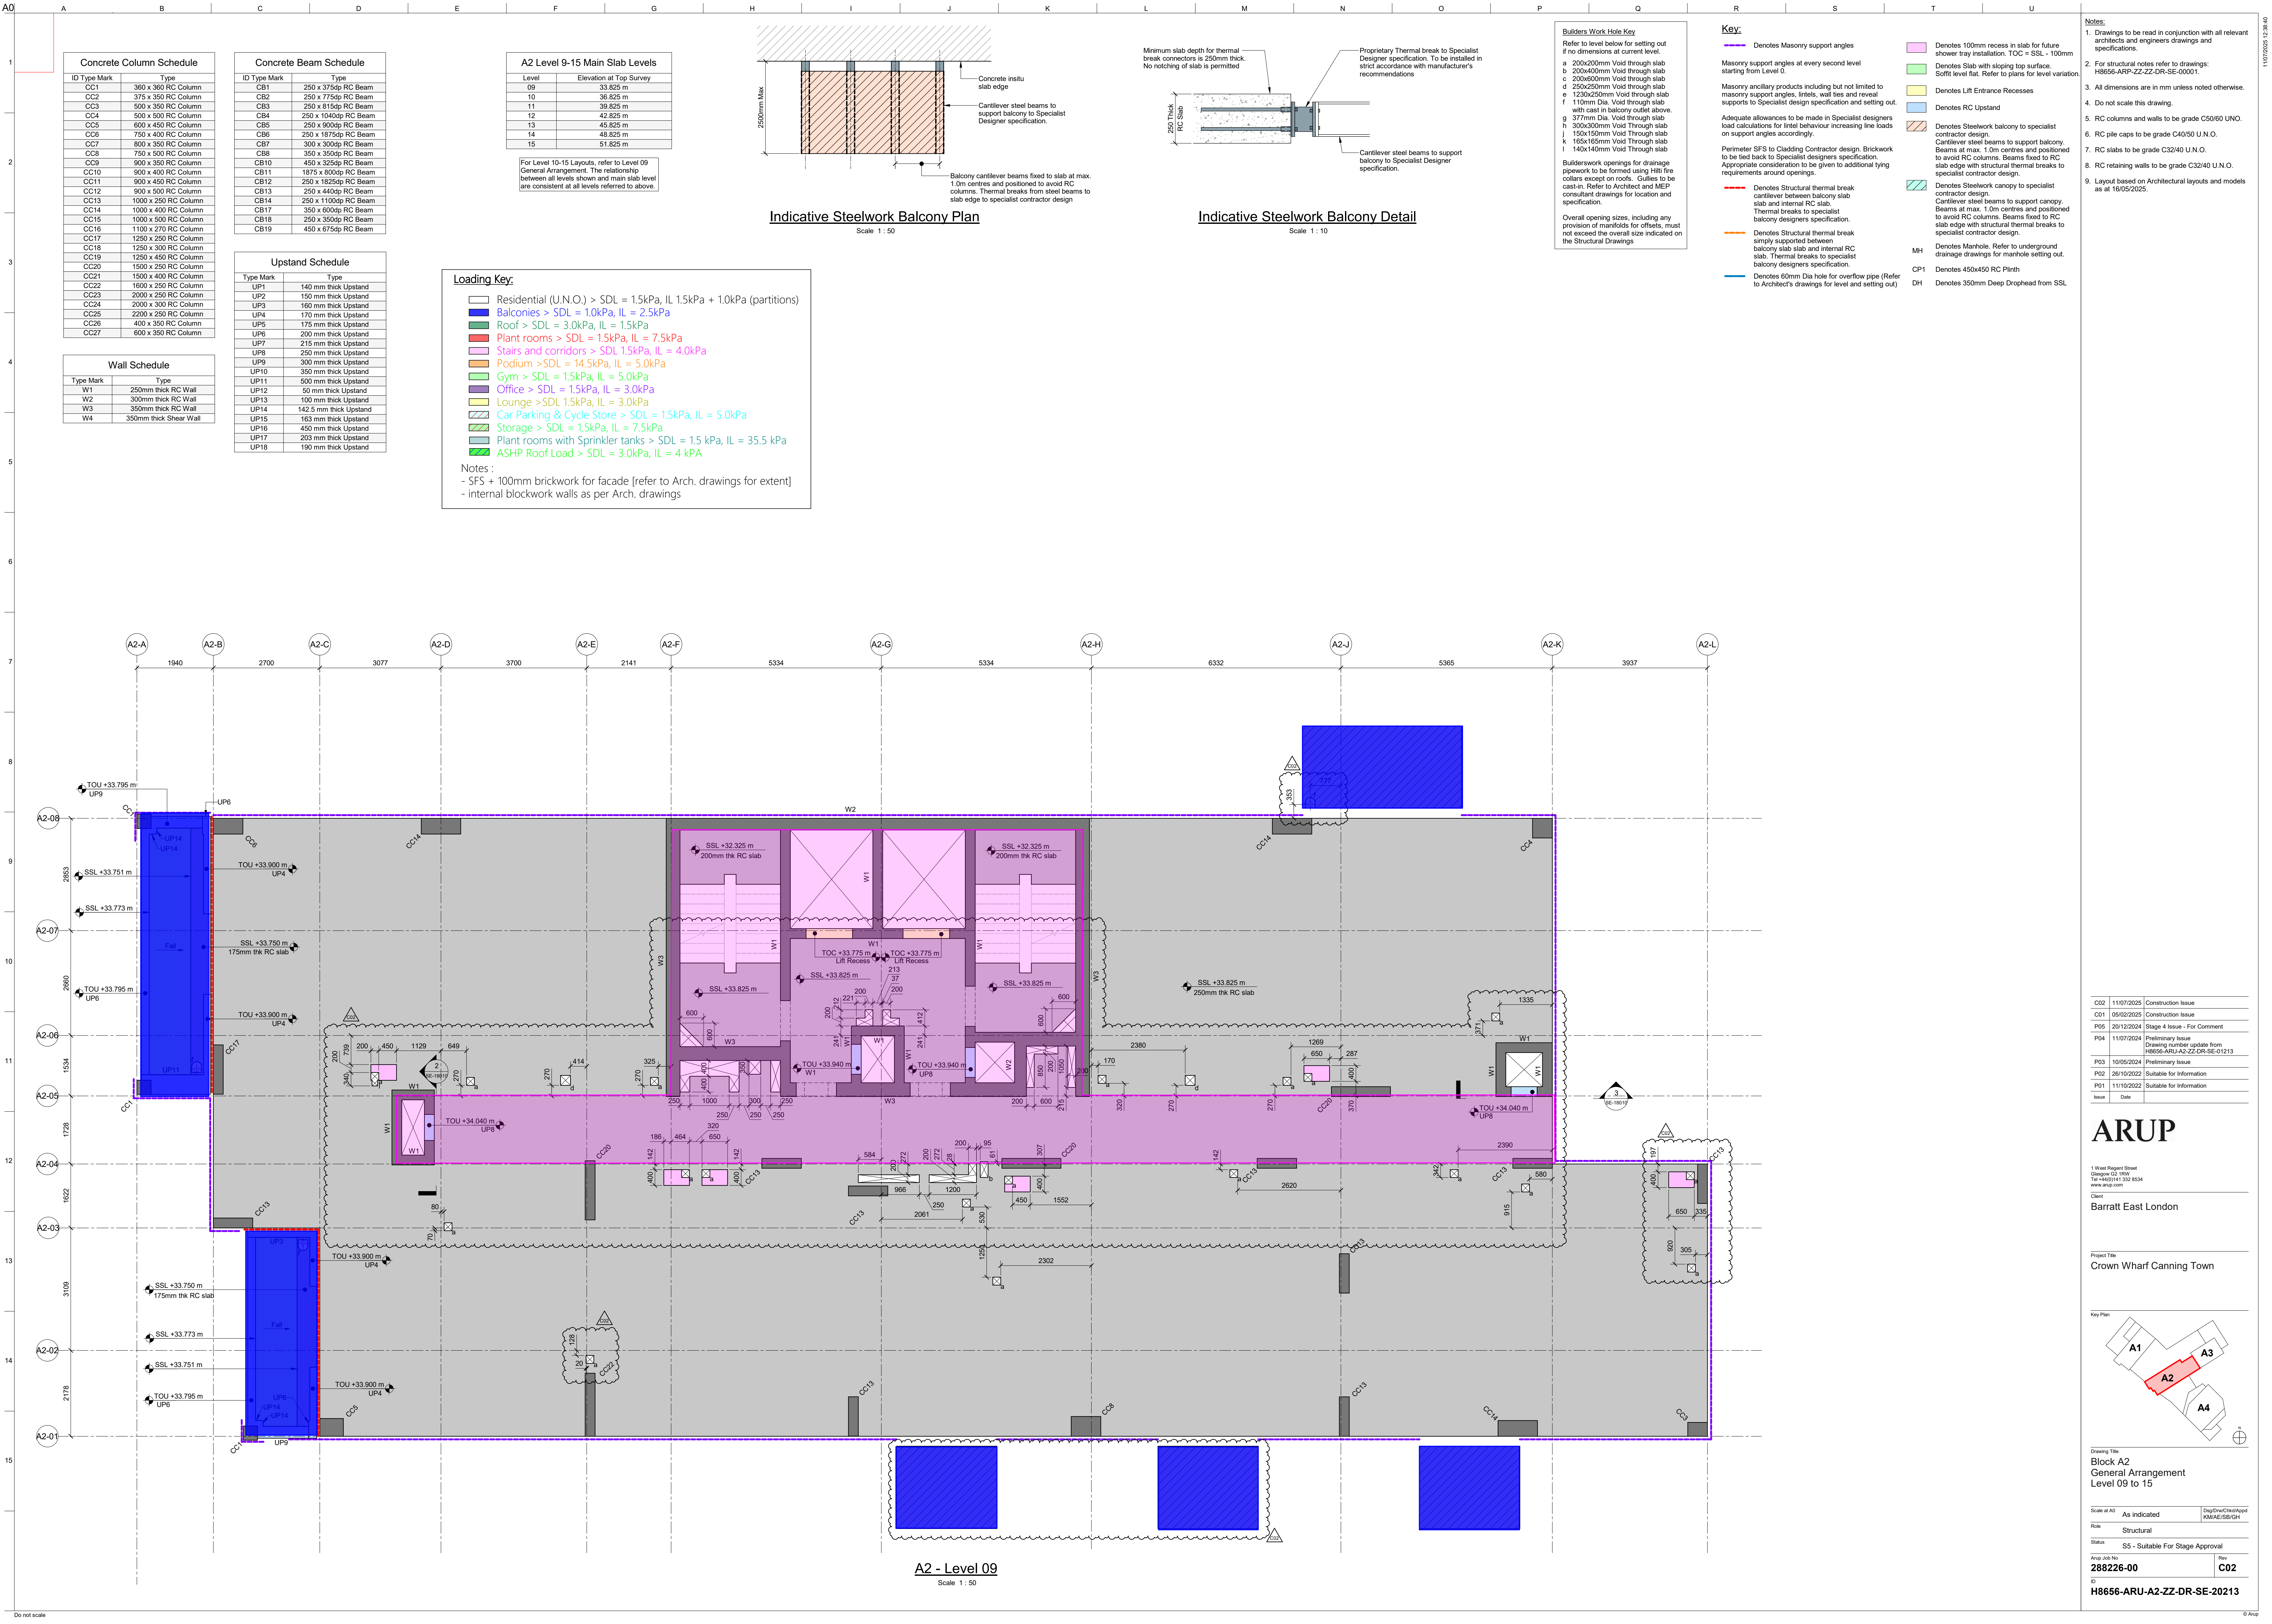

Concrete Column Schedule	
ID Type Mark	Type
CC1	360 x 360 RC Column
CC2	375 x 350 RC Column
CC3	500 x 350 RC Column
CC4	500 x 500 RC Column
CC5	600 x 450 RC Column
CC6	750 x 400 RC Column
CC7	800 x 350 RC Column
CC8	750 x 500 RC Column
CC9	900 x 350 RC Column
CC10	900 x 400 RC Column
CC11	900 x 450 RC Column
CC12	900 x 500 RC Column
CC13	1000 x 250 RC Column
CC14	1000 x 300 RC Column
CC15	1000 x 500 RC Column
CC16	1100 x 270 RC Column
CC17	1250 x 250 RC Column
CC18	1250 x 300 RC Column
CC19	1250 x 450 RC Column
CC20	1500 x 250 RC Column
CC21	1500 x 400 RC Column
CC22	1600 x 250 RC Column
CC23	2000 x 250 RC Column
CC24	2000 x 300 RC Column
CC25	2200 x 250 RC Column
CC26	400 x 350 RC Column
CC27	600 x 350 RC Column

Concrete Beam Schedule	
ID Type Mark	Type
CB1	250 x 375dp RC Beam
CB2	250 x 775dp RC Beam
CB3	250 x 815dp RC Beam
CB4	250 x 1040dp RC Beam
CB5	250 x 900dp RC Beam
CB6	250 x 1975dp RC Beam
CB7	300 x 300dp RC Beam
CB8	350 x 350dp RC Beam
CB10	450 x 325dp RC Beam
CB11	1875 x 800dp RC Beam
CB12	250 x 1825dp RC Beam
CB13	250 x 440dp RC Beam
CB14	250 x 1100dp RC Beam
CB17	350 x 600dp RC Beam
CB18	250 x 350dp RC Beam
CB19	450 x 675dp RC Beam

A2 Level 9-15 Main Slab Levels	
Level	Elevation at Top Survey
09	33.825 m
10	36.825 m
11	39.825 m
12	42.825 m
13	45.825 m
14	48.825 m
15	51.825 m

For Level 10-15 Layouts, refer to Level 09 General Arrangement. The relationship between all levels shown and main slab level are consistent at all levels referred to above.

Upstand Schedule	
Type Mark	Type
UP1	140 mm thick Upstand
UP2	150 mm thick Upstand
UP3	160 mm thick Upstand
UP4	170 mm thick Upstand
UP5	175 mm thick Upstand
UP6	200 mm thick Upstand
UP7	215 mm thick Upstand
UP8	250 mm thick Upstand
UP9	300 mm thick Upstand
UP10	350 mm thick Upstand
UP11	500 mm thick Upstand
UP12	50 mm thick Upstand
UP13	100 mm thick Upstand
UP14	142.5 mm thick Upstand
UP15	163 mm thick Upstand
UP16	450 mm thick Upstand
UP17	203 mm thick Upstand
UP18	190 mm thick Upstand

Wall Schedule	
Type Mark	Type
W1	250mm thick RC Wall
W2	300mm thick RC Wall
W3	350mm thick RC Wall
W4	350mm thick Shear Wall

Loading Key:


- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
- Balconies > SDL = 1.0kPa, IL = 2.5kPa
- Roof > SDL = 3.0kPa, IL = 1.5kPa
- Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
- Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
- Podium >SDL = 14.5kPa, IL = 5.0kPa
- Gym > SDL = 1.5kPa, IL = 5.0kPa
- Office > SDL = 1.5kPa, IL = 3.0kPa
- Lounge >SDL 1.5kPa, IL = 3.0kPa
- Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
- Storage > SDL = 1.5kPa, IL = 7.5kPa
- Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
- ASHP Roof Load > SDL = 3.0kPa, IL = 4 kPa

Notes :

- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
- Internal blockwork walls as per Arch. drawings

Indicative Steelwork Balcony Plan

Scale 1 : 50

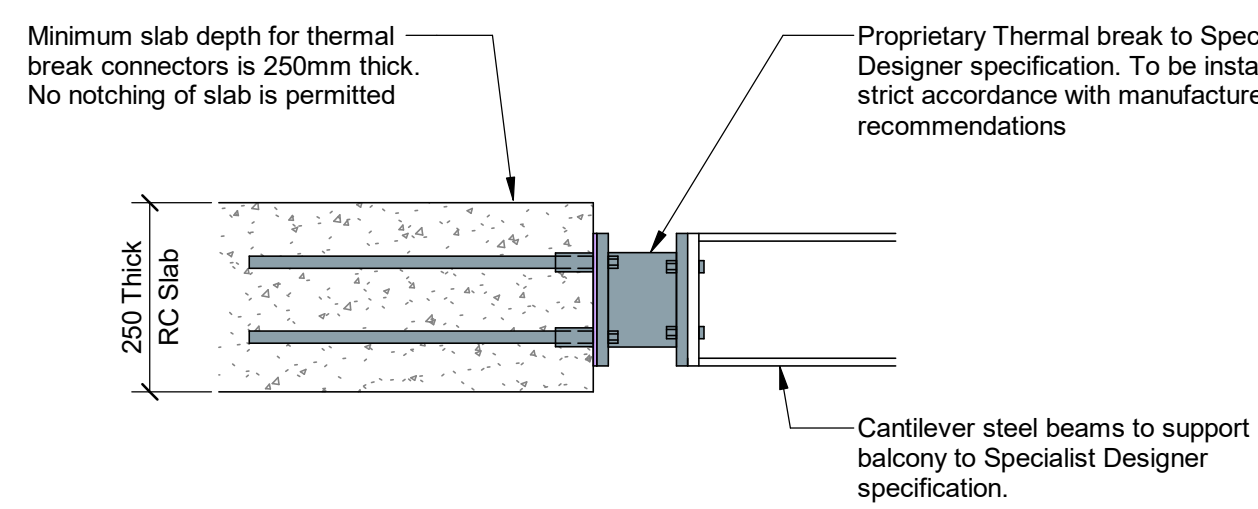

Indicative Steelwork Balcony Detail

Scale 1 : 10

Builders Work Hole Key
Refer to level below for setting out if no dimensions at current level.

- a 200x200mm Void through slab
- b 200x400mm Void through slab
- c 200x600mm Void through slab
- d 250x250mm Void through slab
- e 120x250mm Void through slab
- f 110mm Dia. Void through slab
- g 377mm Dia. Void through slab
- h 300x300mm Void Through slab
- j 150x150mm Void Through slab
- k 165x165mm Void Through slab
- l 140x140mm Void Through slab

Builderswork openings for drainage pipework to be formed using fill the collars except on roofs. Gullies to be cast-in. Refer to Architect and MEP consultant drawings for location and specification.

Overall opening sizes, including any provision of manifolds for offsets, must not exceed the overall size indicated on the Structural Drawings

Key:

- Denotes Masonry support angles
- Masonry support angles at every second level starting from Level 0.
- Masonry ancillary products including but not limited to masonry support angles, lintels, wall ties and reveal supports to Specialist design specification and setting out.
- Adequate allowances to be made in Specialist designers load calculations for lintel behaviour increasing line loads on support angles accordingly.
- Perimeter SFS to Cladding Contractor design. Brickwork to be tied back to Specialist designers specification. Appropriate consideration to be given to additional tying requirements around openings.
- Denotes Structural thermal break cantilever between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
- Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
- Denotes 60mm Dia hole for overflow pipe (Refer to Architect's drawings for level and setting out)
- Denotes 100mm recess in slab for future shower tray installation. TOC = SSL - 100mm
- Denotes Slab with sloping top surface. Soffit level flat. Refer to plans for level variation
- Denotes Lift Entrance Recesses
- Denotes RC Upstand
- Denotes Steelwork balcony to specialist contractor design. Cantilever steel beams to support balcony. Beams at max. 1.0m centres and positioned to avoid RC columns. Beams fixed to RC slab edge with structural thermal breaks to specialist contractor design.
- Denotes Steelwork canopy to specialist contractor design. Cantilever steel beams to support canopy. Beams at max. 1.0m centres and positioned to avoid RC columns. Beams fixed to RC slab edge with structural thermal breaks to specialist contractor design.
- Denotes Manhole. Refer to underground drainage drawings for manhole setting out.
- CP1 Denotes 450x450 RC Plinth
- DH Denotes 350mm Deep Drophead from SSL

Notes:

- Drawings to be read in conjunction with all relevant architects and engineers drawings and specifications.
- For structural notes refer to drawings: H8656-ARP-ZZ-ZZ-DR-SE-00001.
- All dimensions are in mm unless noted otherwise.
- Do not scale this drawing.
- RC columns and walls to be grade C50/60 U.N.O.
- RC pile caps to be grade C40/50 U.N.O.
- RC slabs to be grade C32/40 U.N.O.
- RC retaining walls to be grade C32/40 U.N.O.
- Layout based on Architectural layouts and models as at 16/05/2025.


CO2	11/07/2025	Construction Issue
CO1	05/02/2025	Construction Issue
P05	20/12/2024	Stage 4 Issue - For Comment
P04	11/07/2024	Preliminary Issue Drawing number update from H8656-ARU-A2-ZZ-DR-SE-01213
P03	10/05/2024	Preliminary Issue
P02	26/10/2022	Suitable for Information
P01	11/10/2022	Suitable for Information
Issue	Date	

ARUP

1 West Regent Street
Glasgow G2 0RH
Tel +44(0)141 332 8534
www.arup.com


Client
Barratt East London


Project Title
Crown Wharf Canning Town

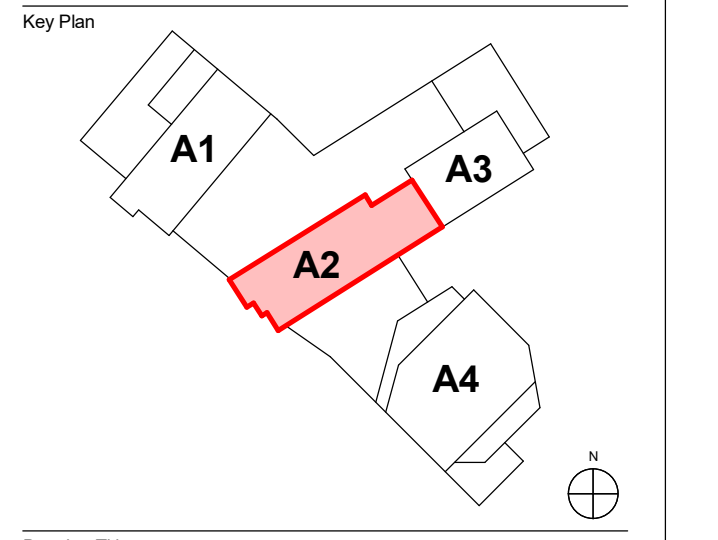



Drawing Title
Block A2
General Arrangement
Level 09 to 15


Scale of A0	As indicated	Dwg/Dwn/Check/Approved
Role	Structural	KMA/ES/SGH
Status	S5 - Suitable For Stage Approval	
Appr Job No	288226-00	Rev
Rev		C02
Dr	H8656-ARU-A2-ZZ-DR-SE-20213	

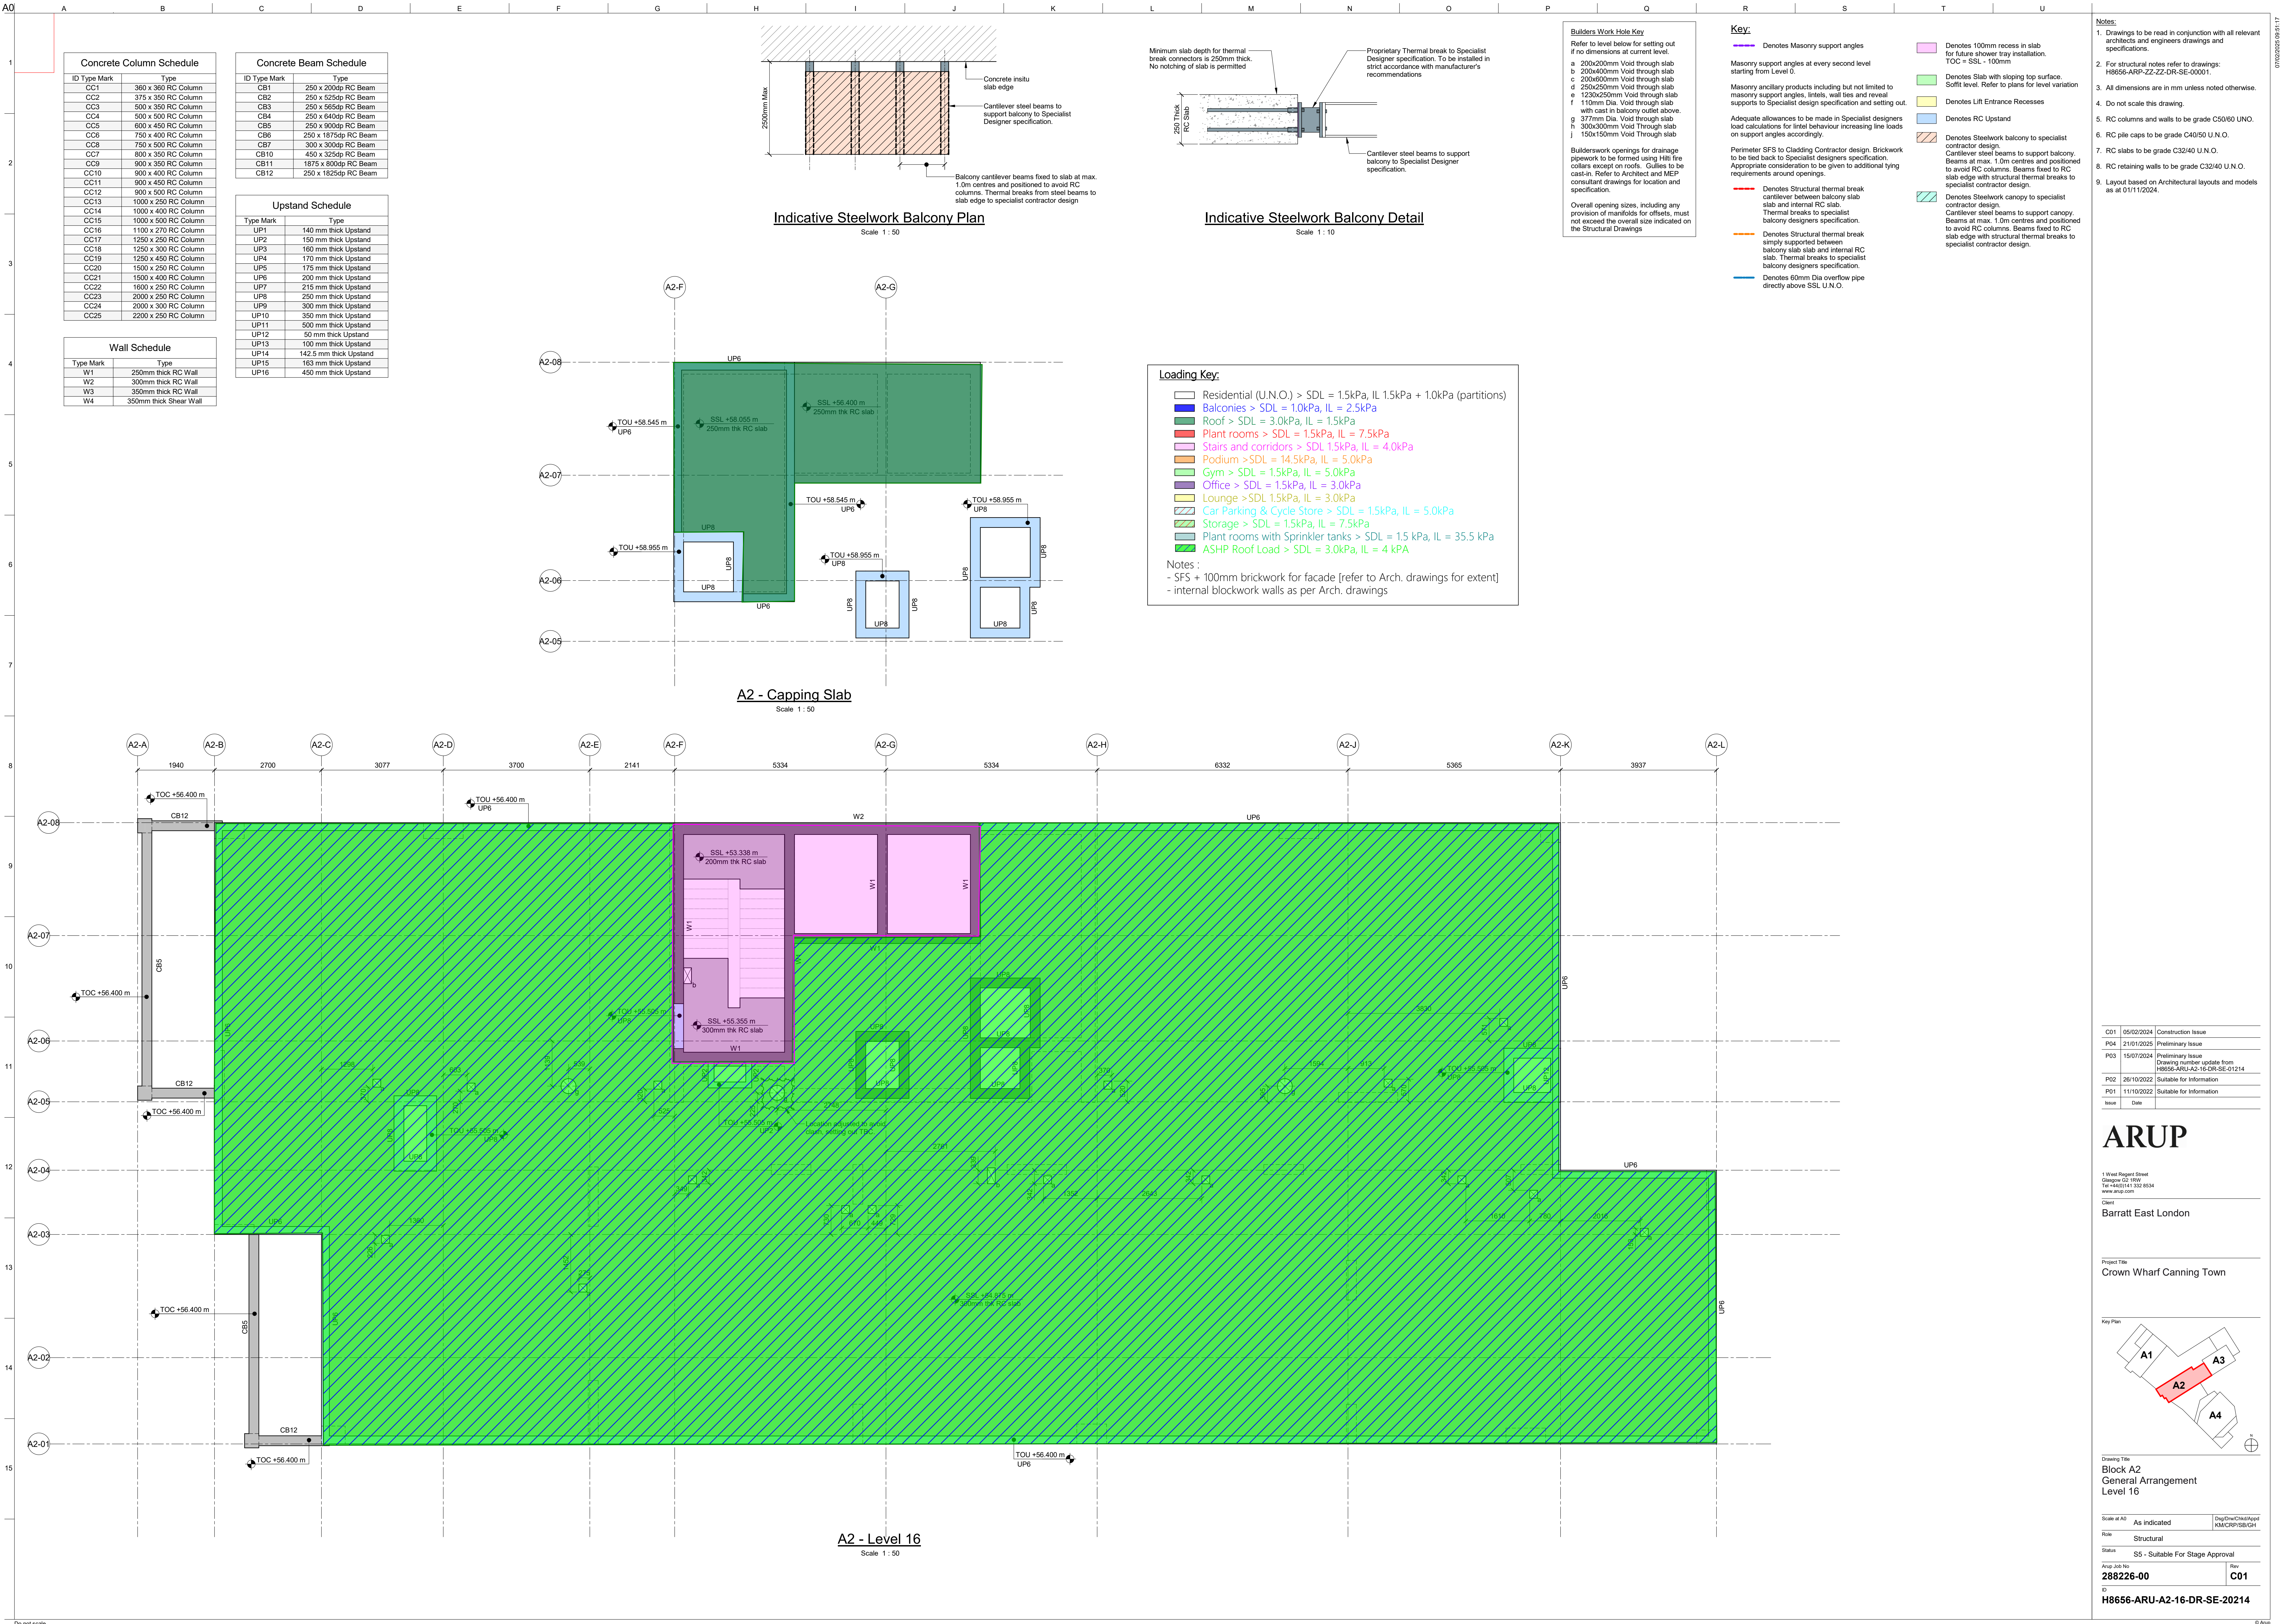


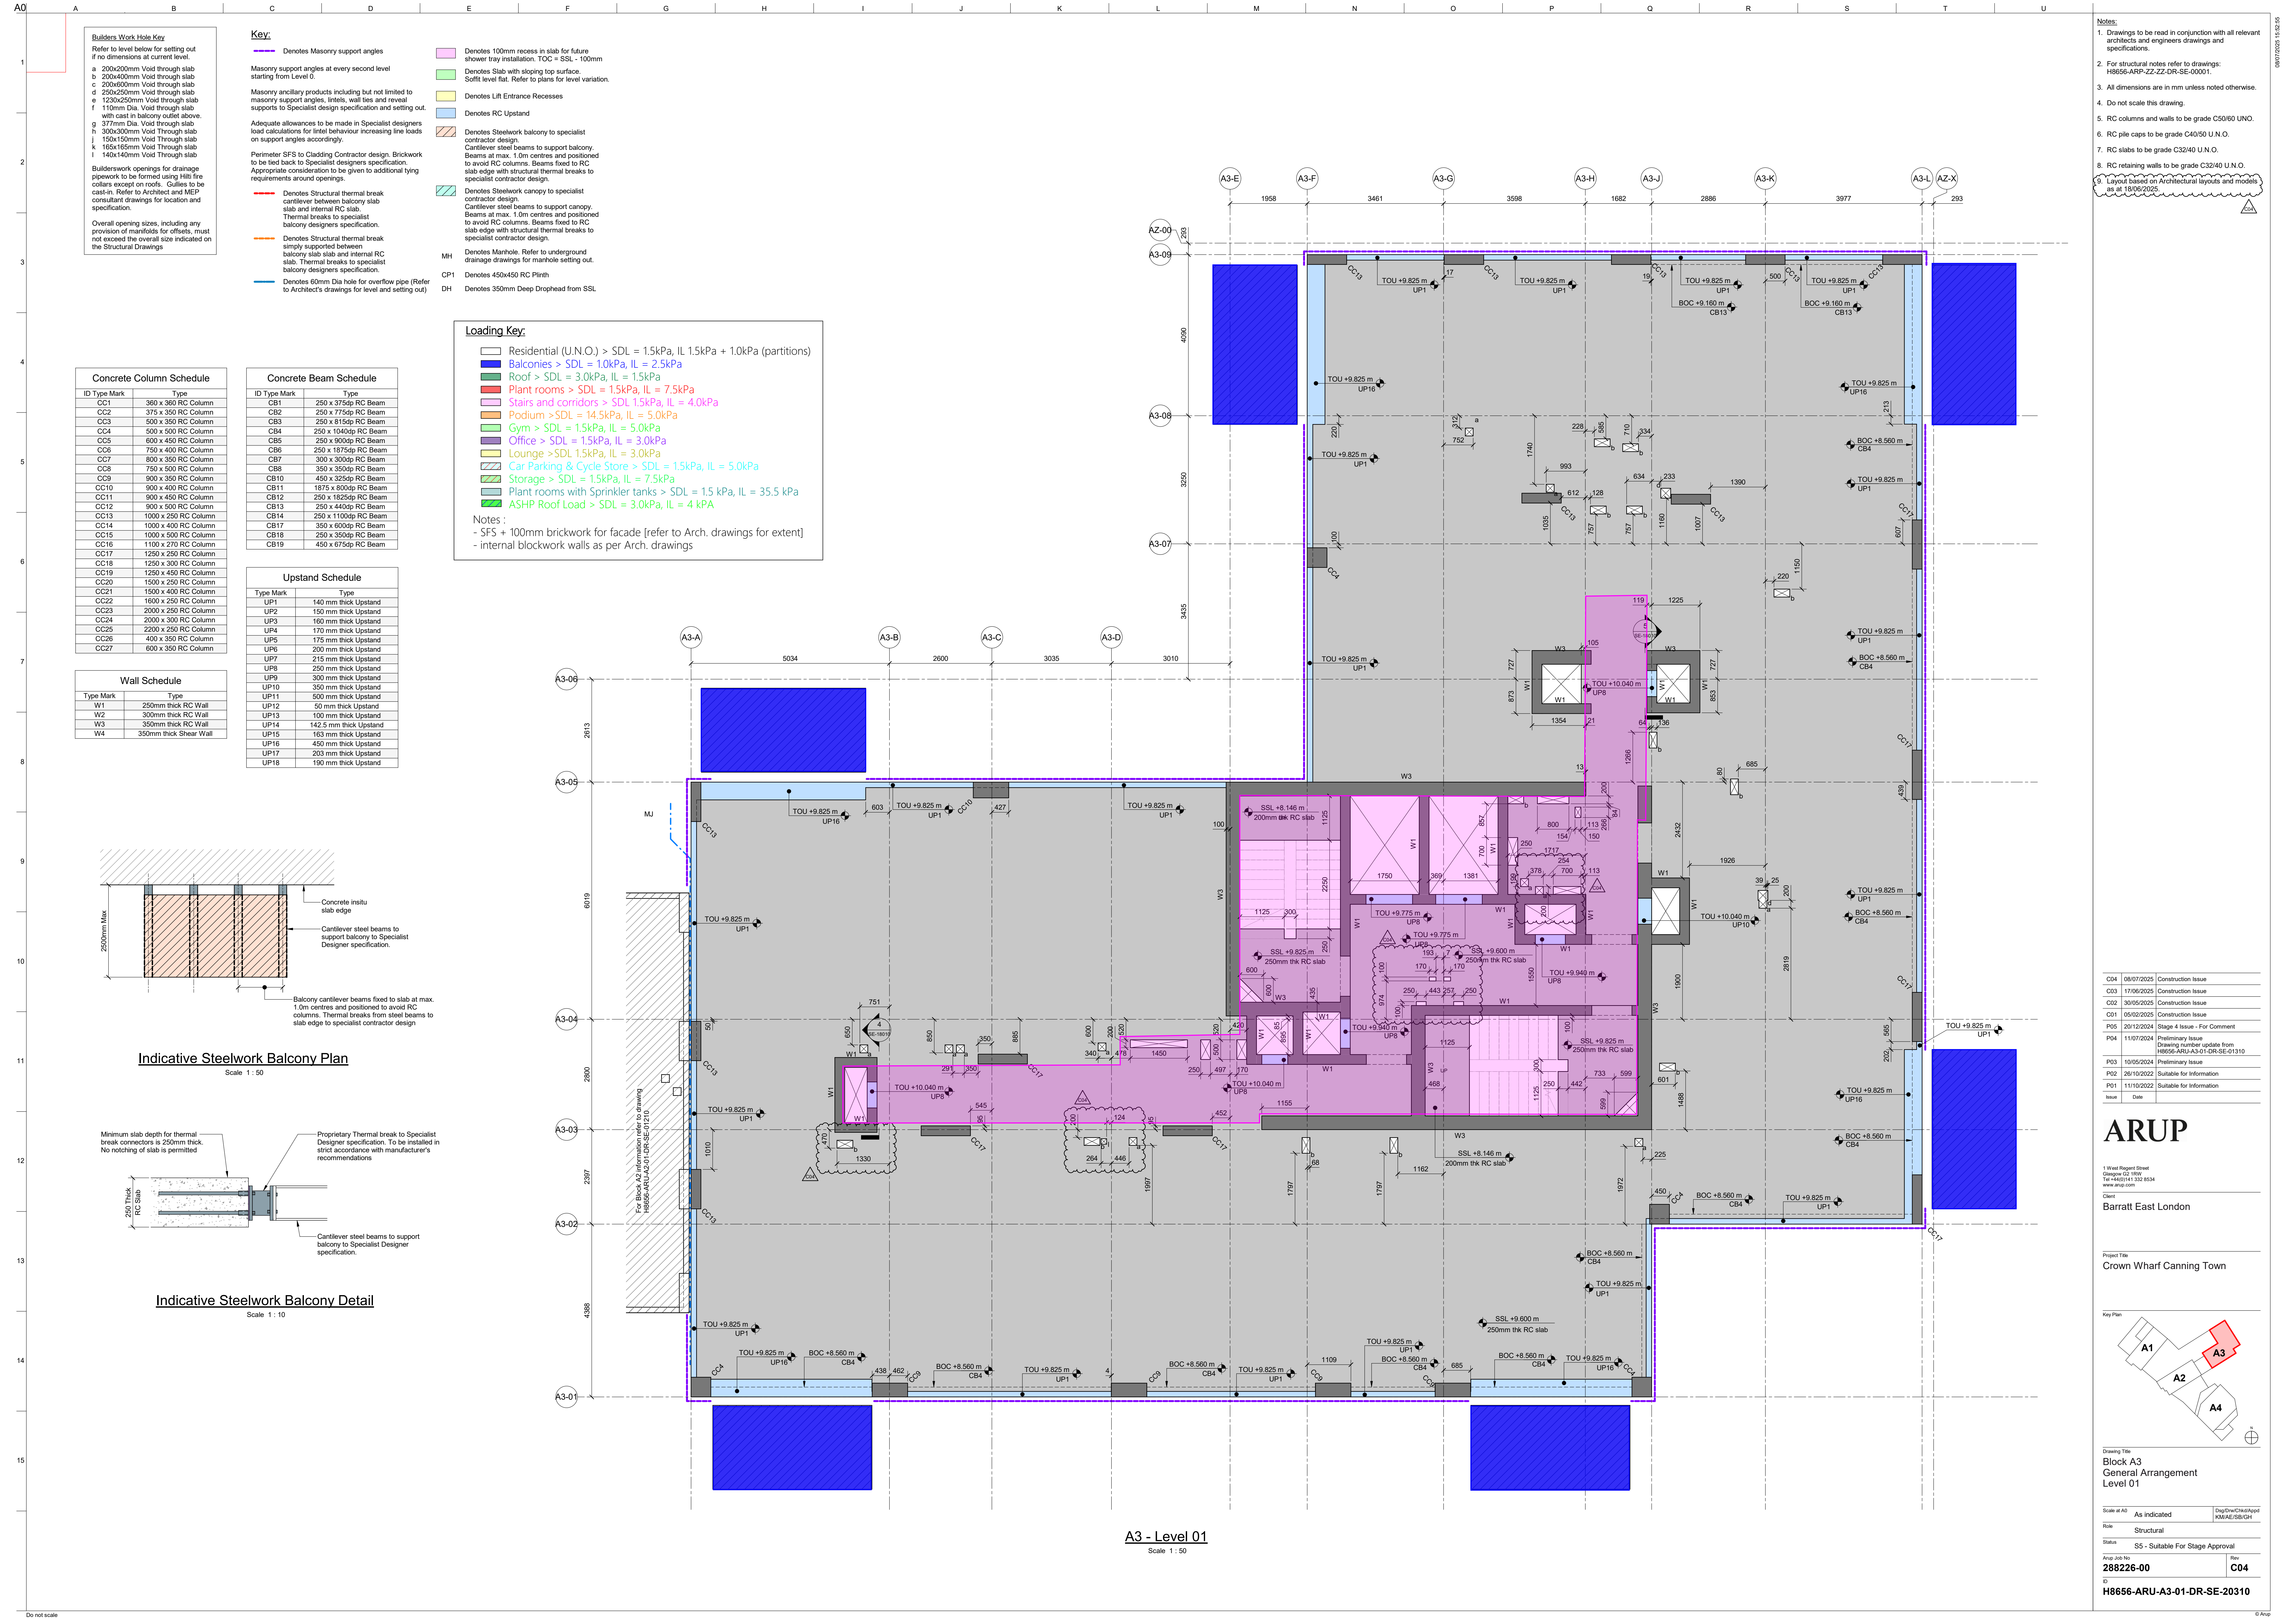

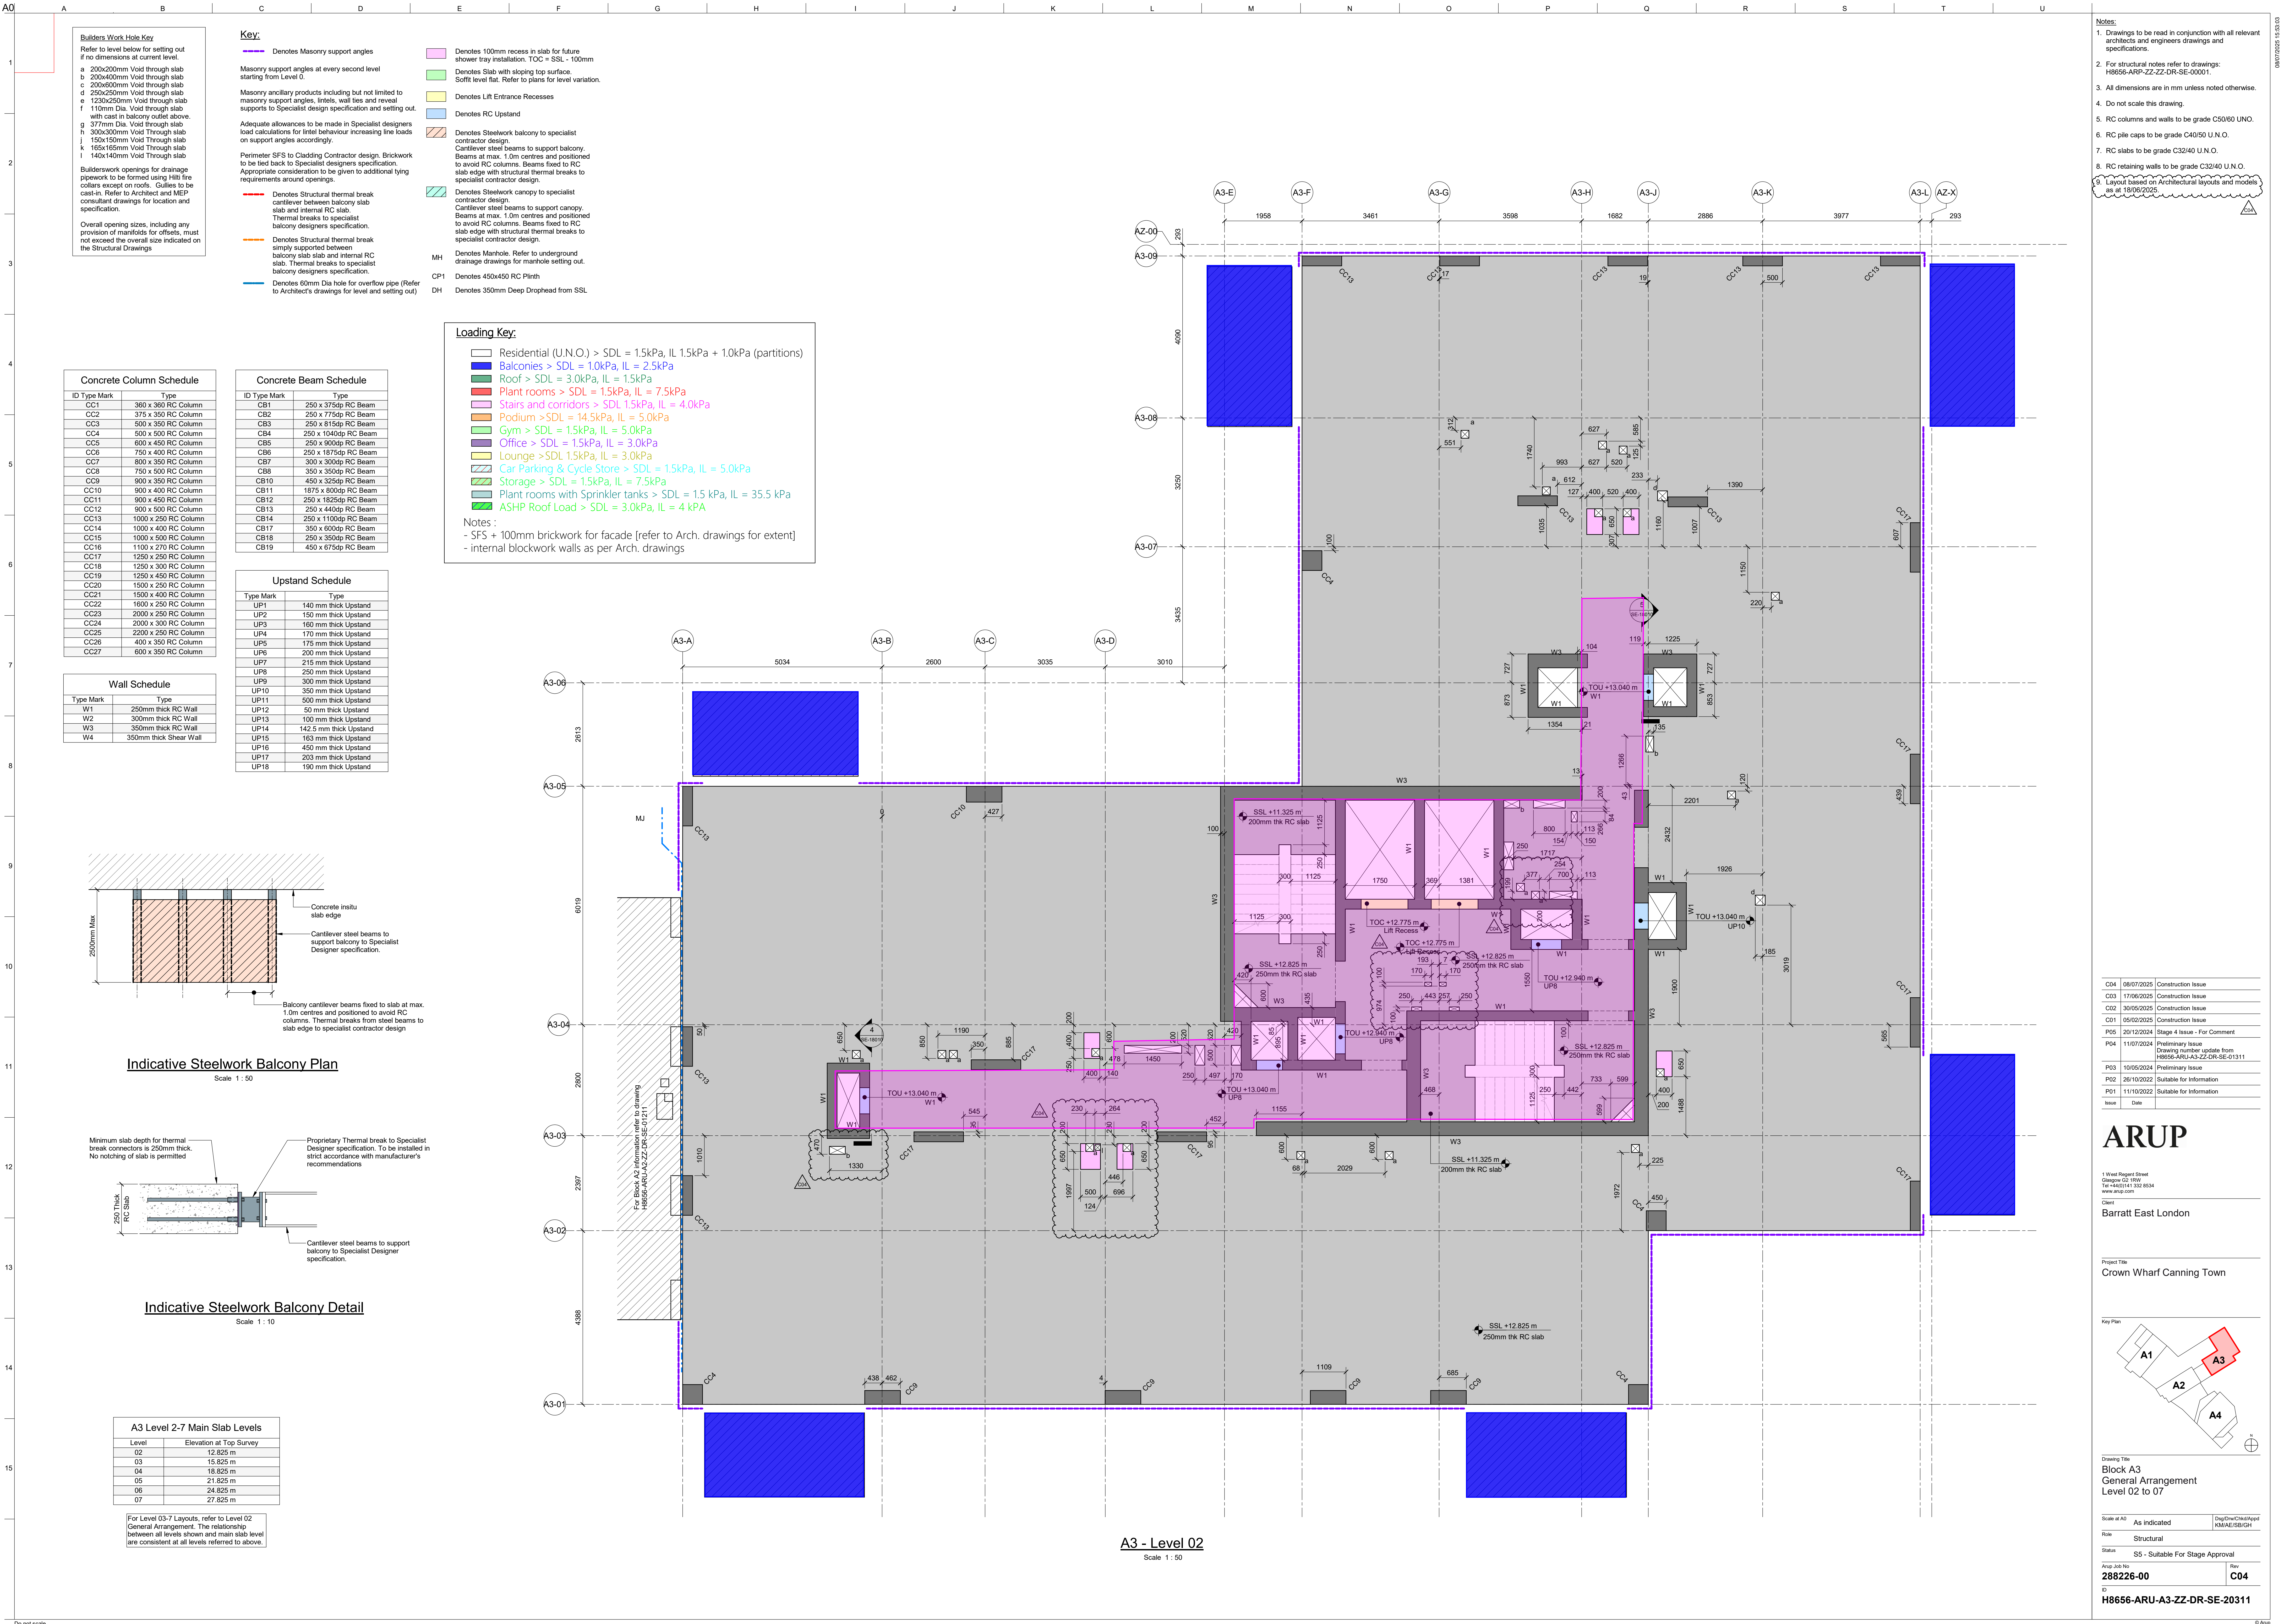

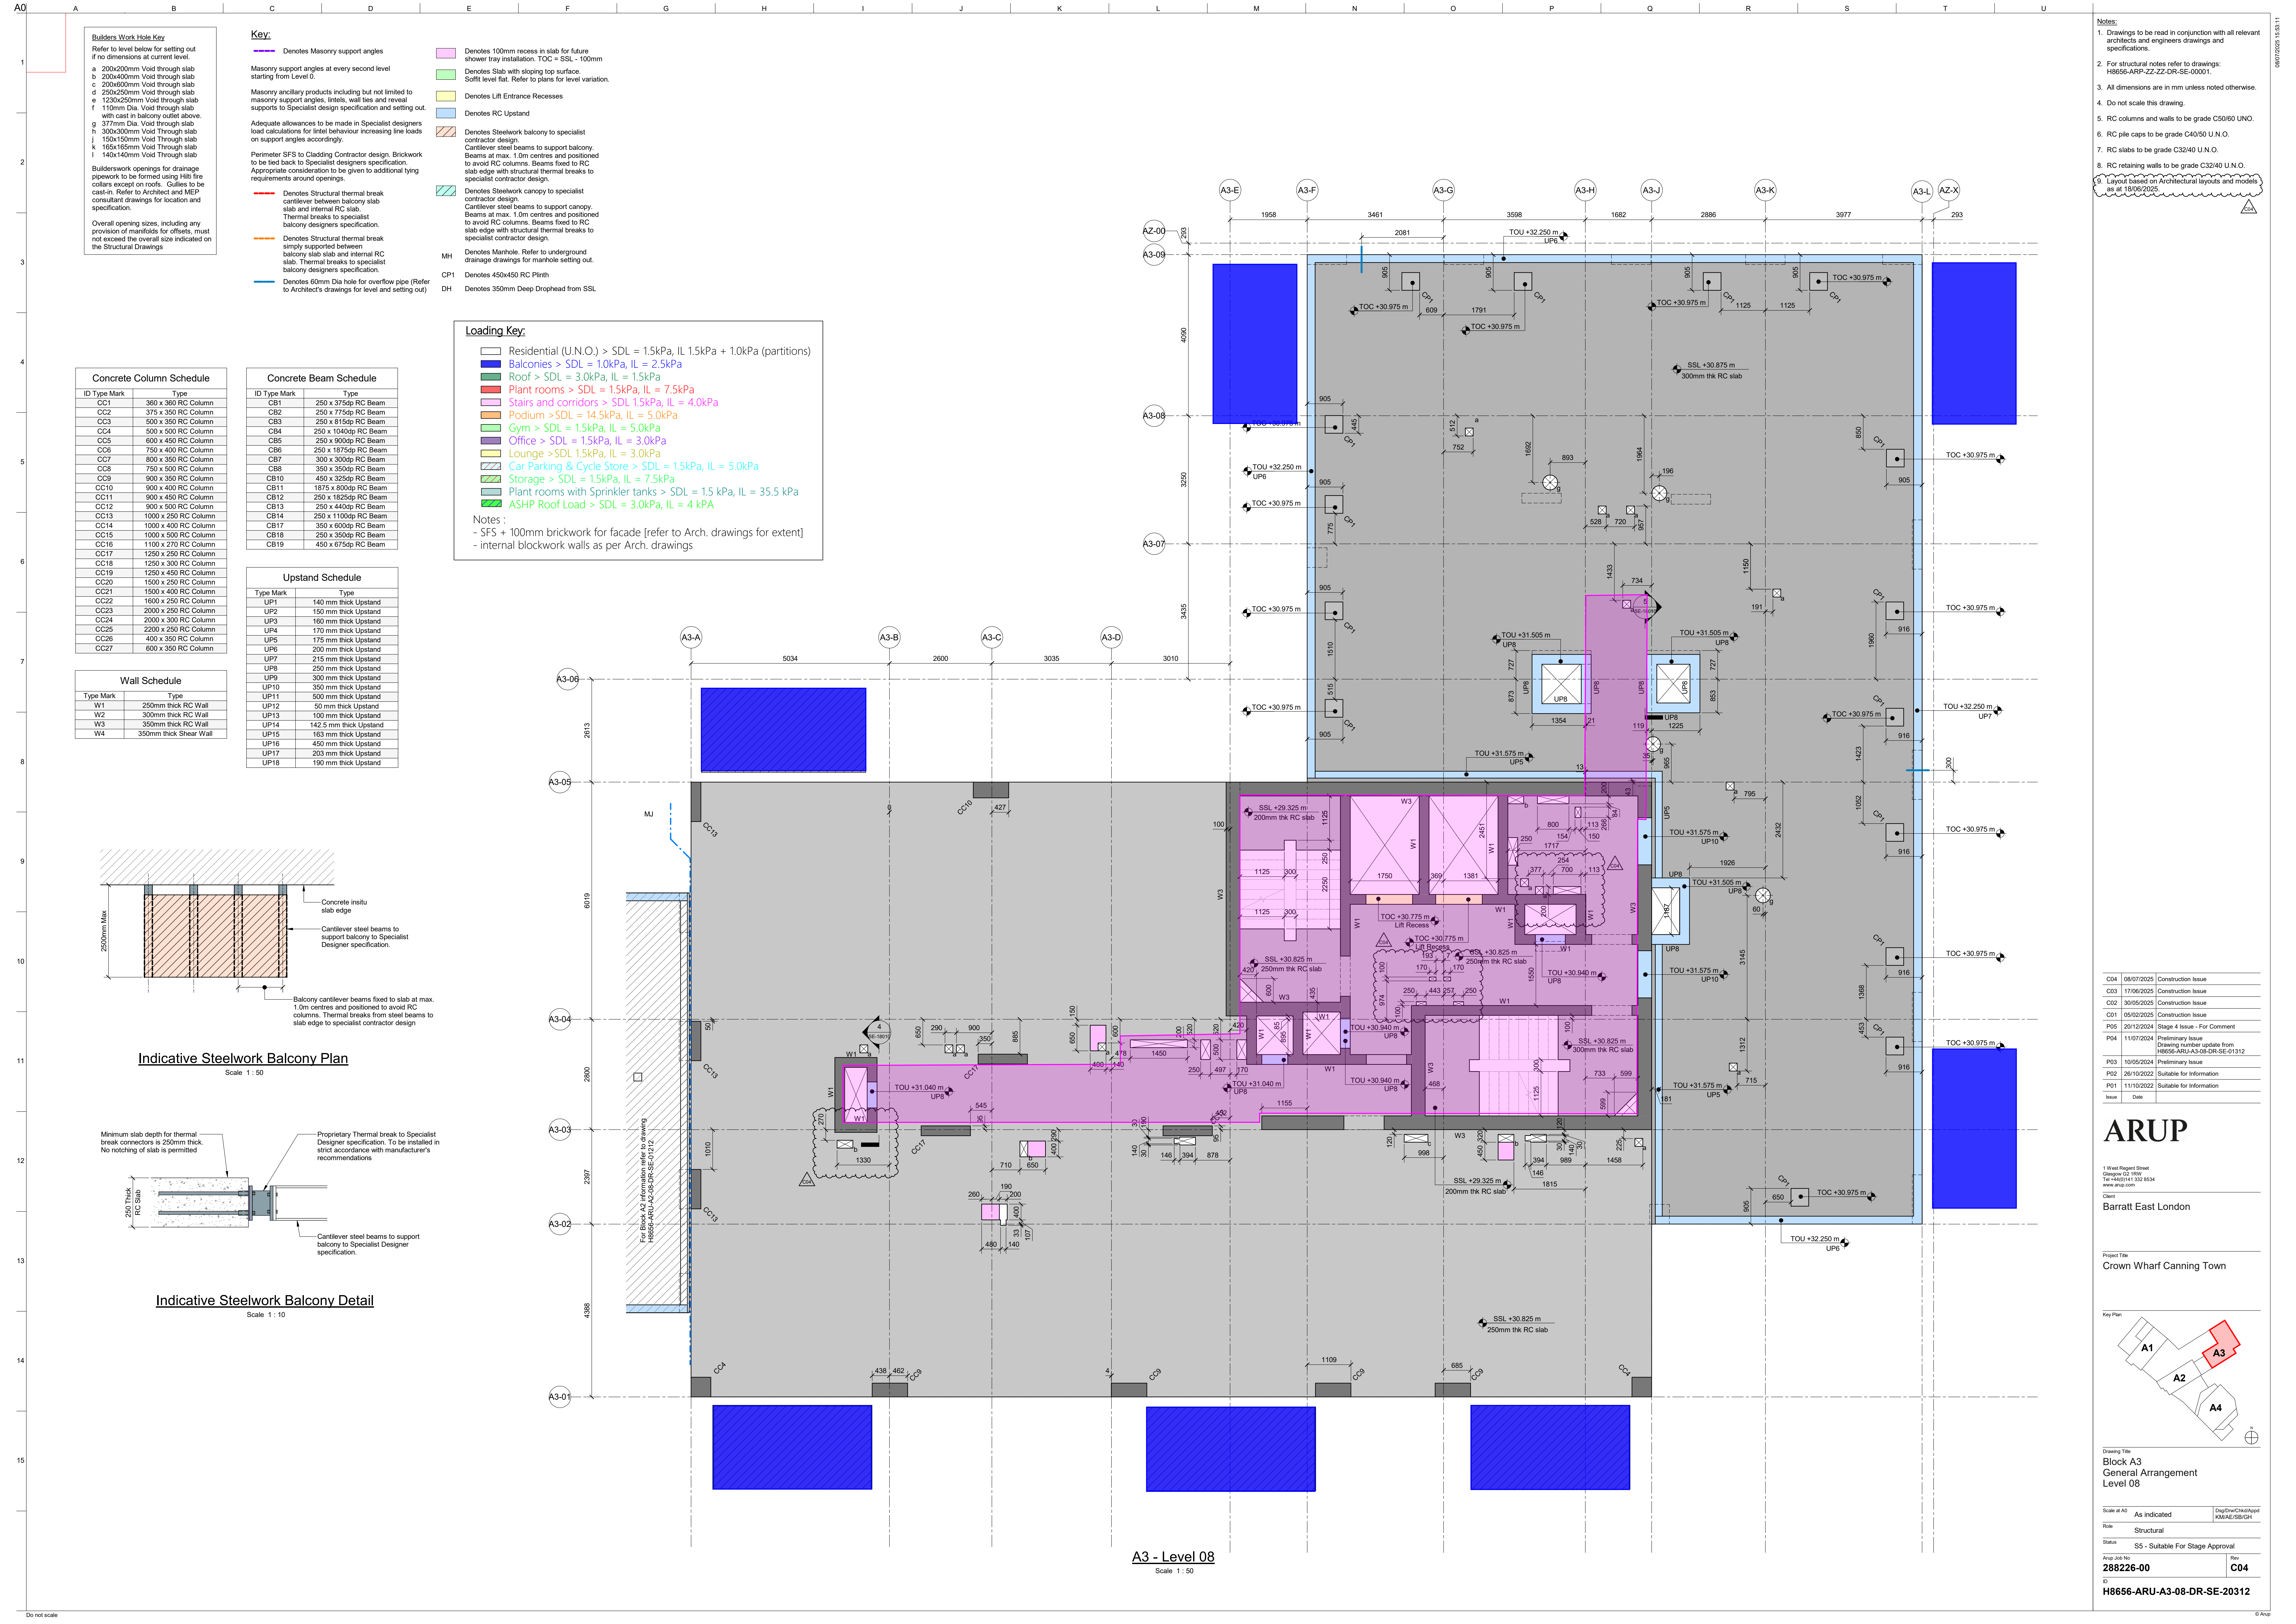


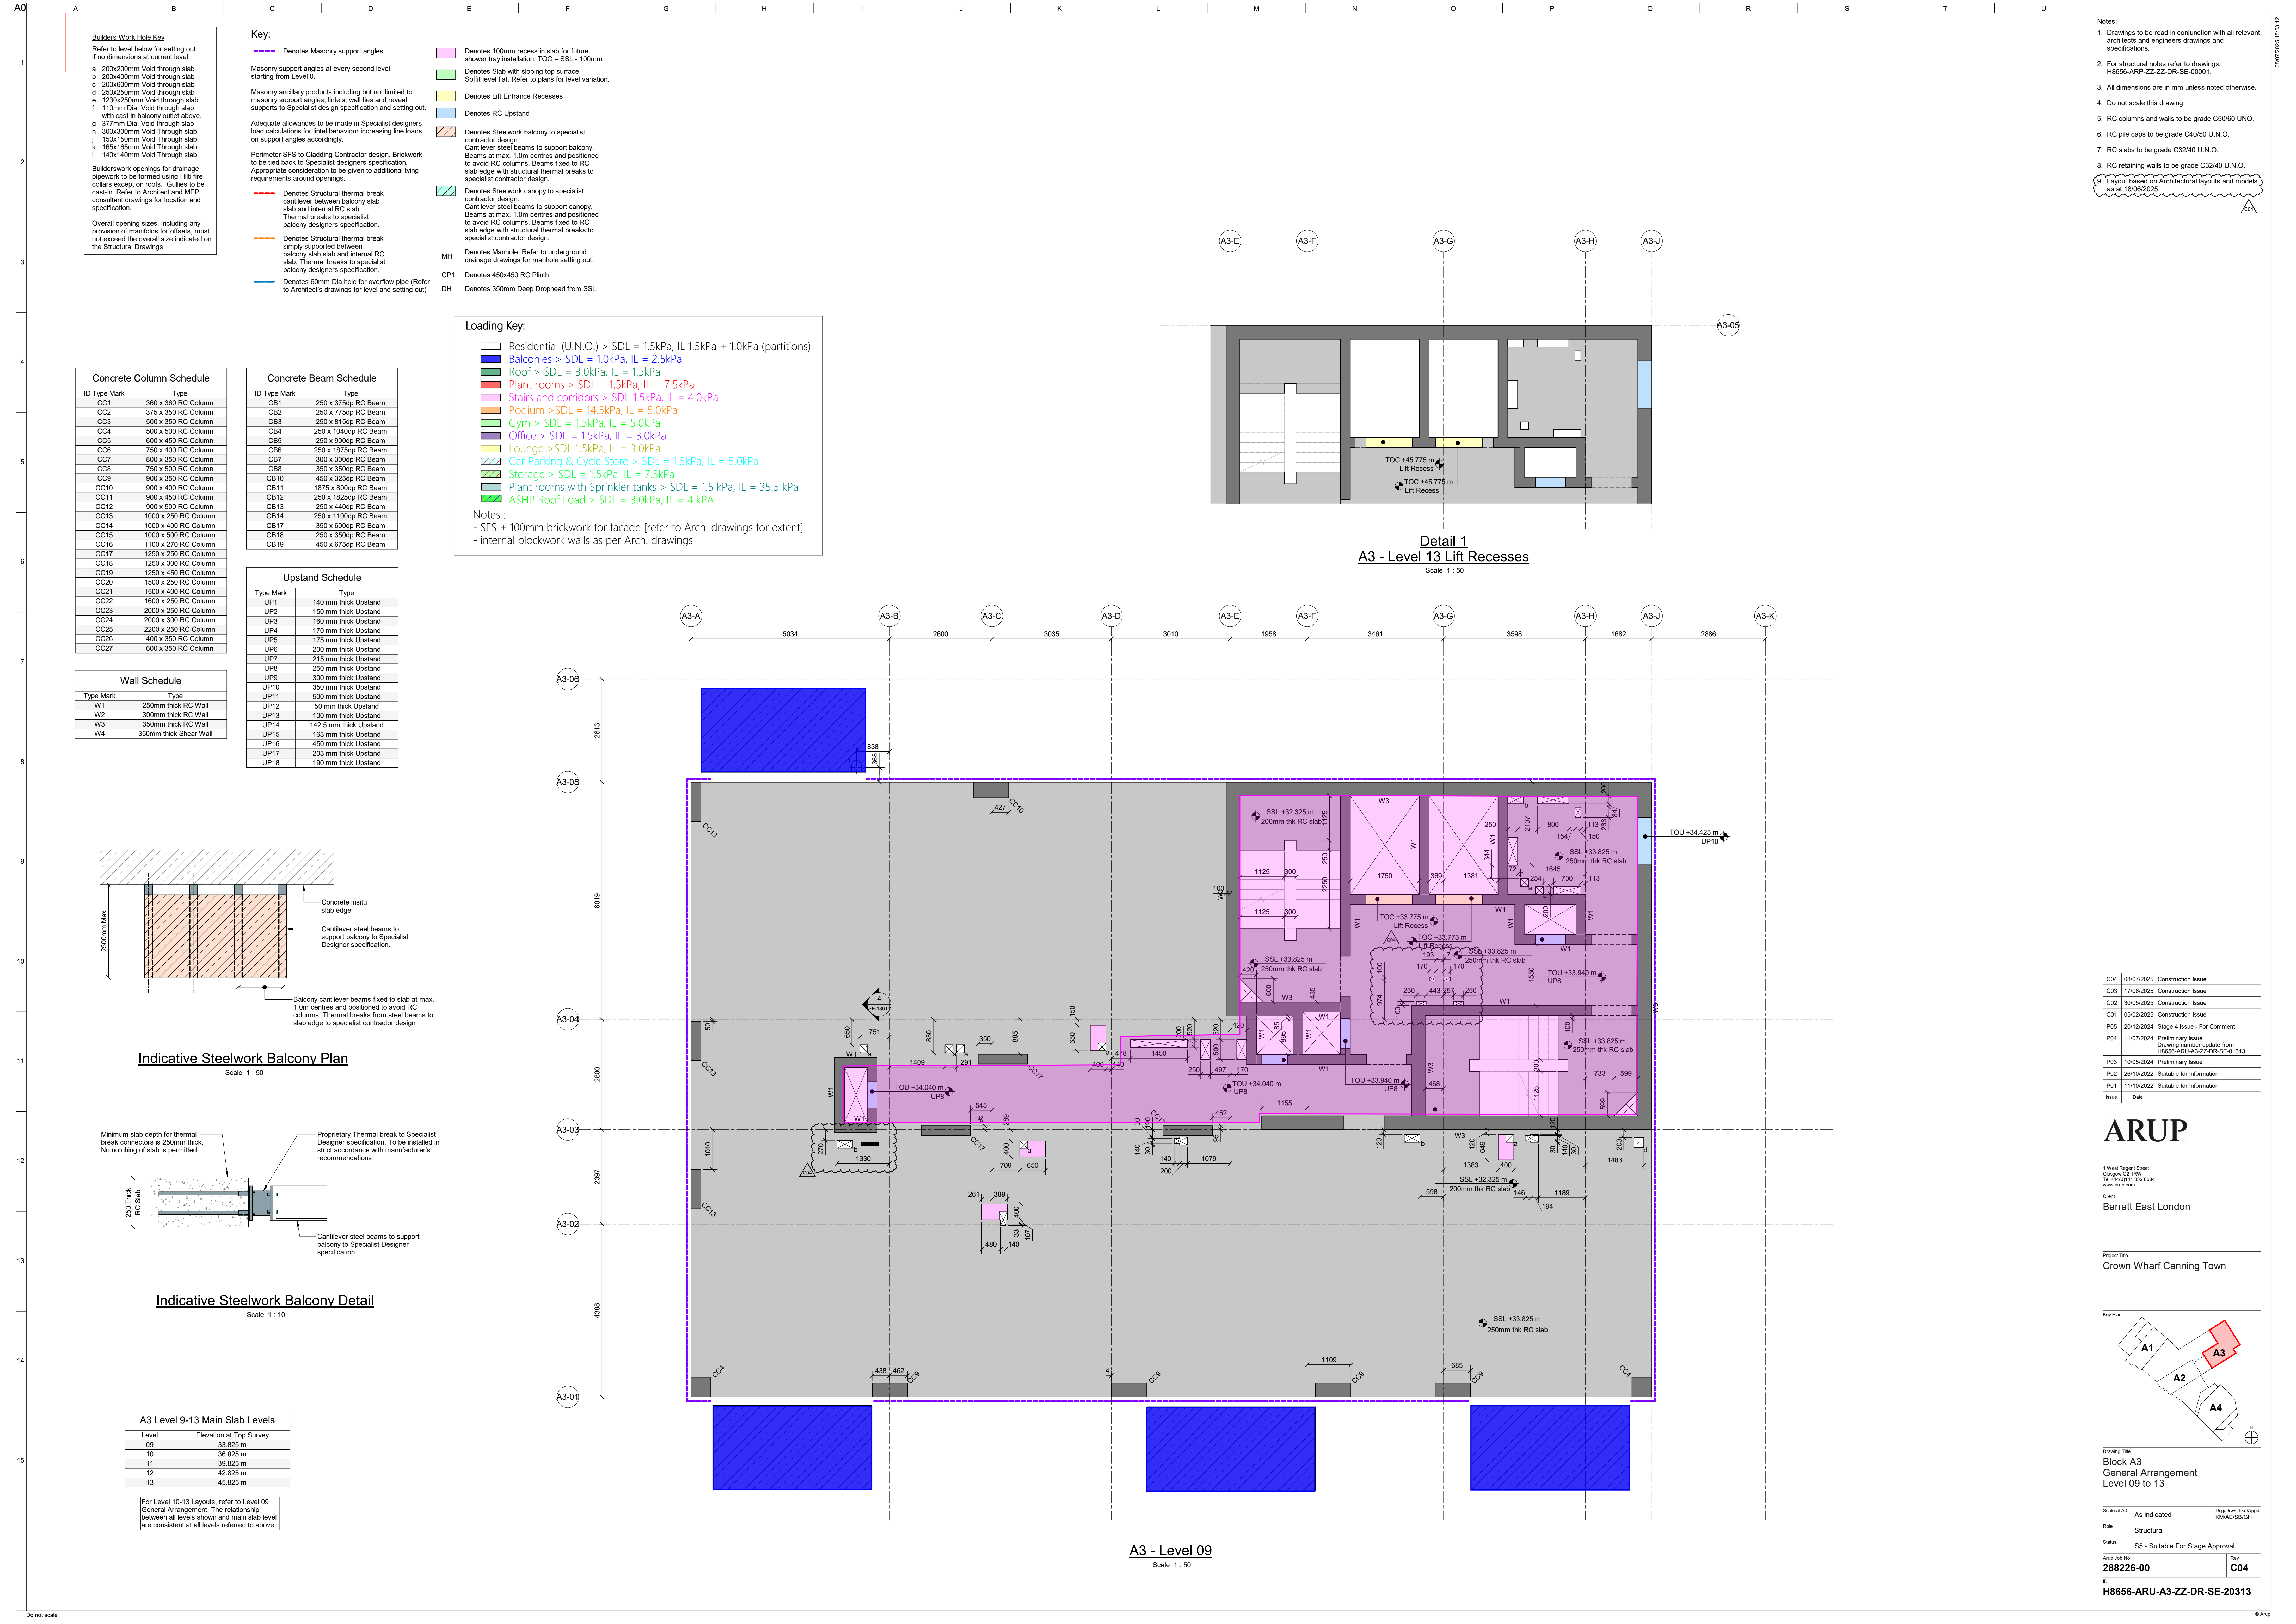

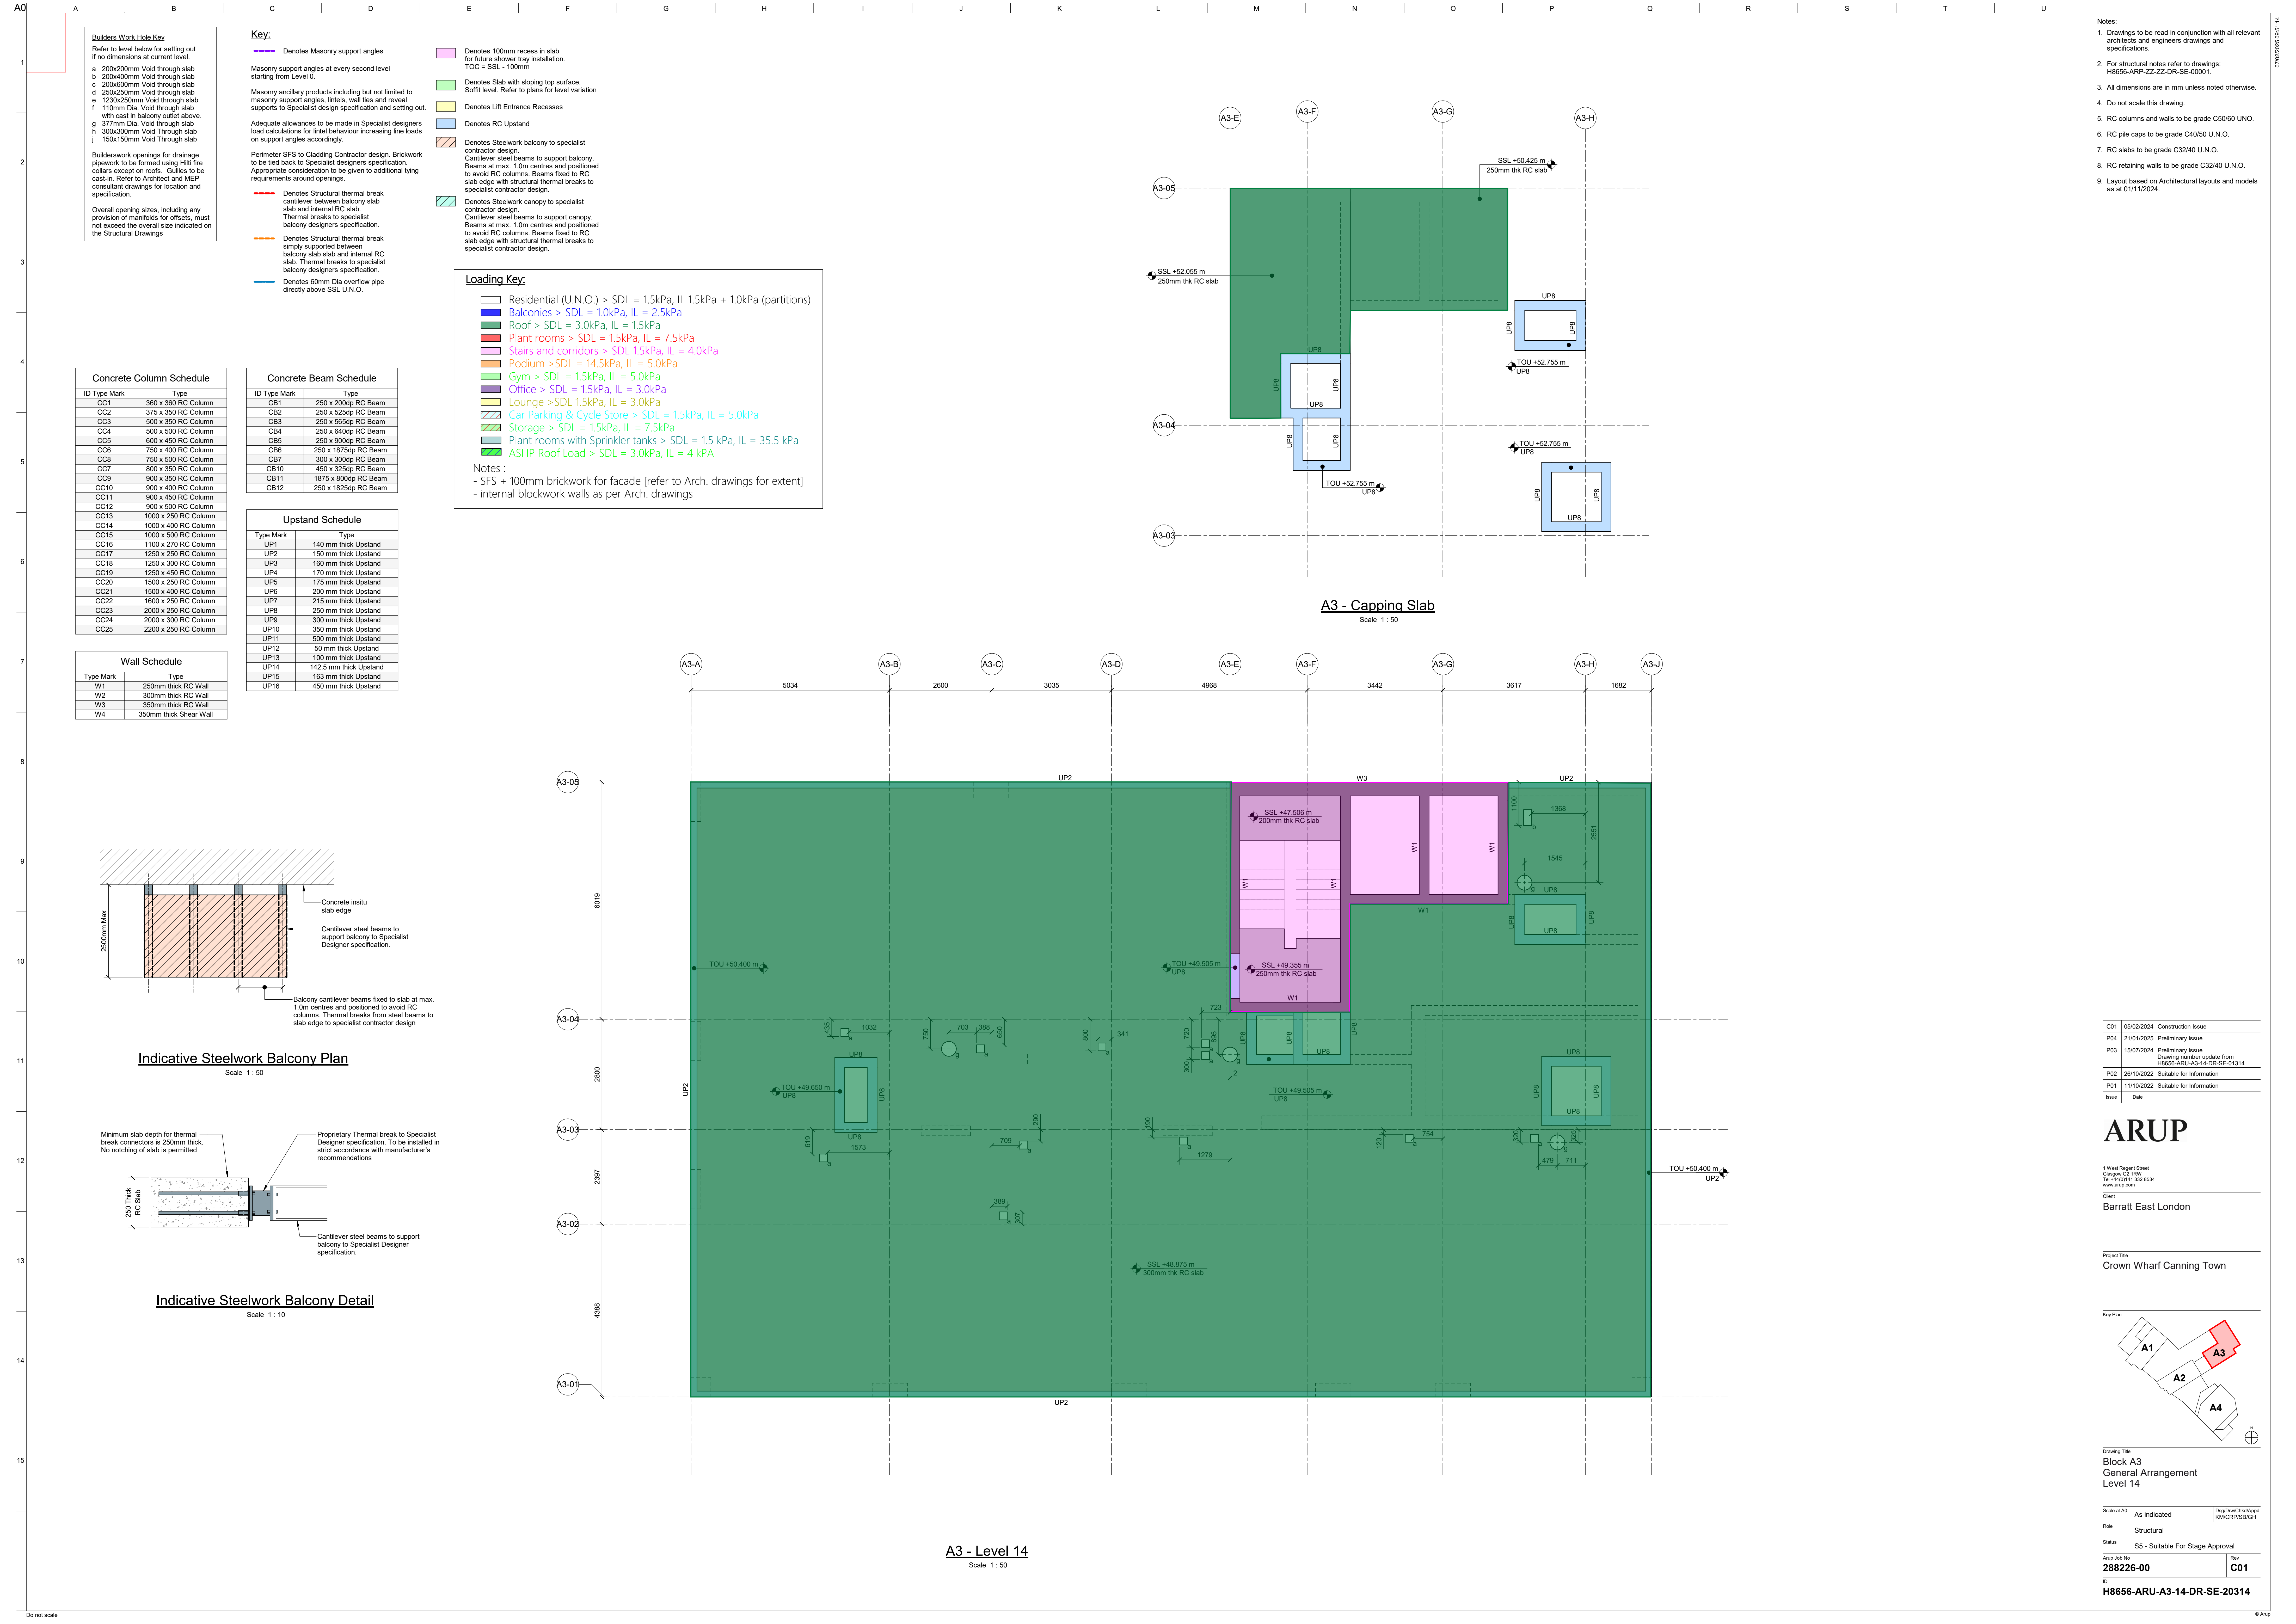

Upstand Schedule	
ID Type Mark	Wall Type
UP1	140mm thick upstand
UP2	150mm thick upstand
UP4	200mm thick upstand
UP5	215mm thick upstand
UP6	250mm thick upstand
UP7	400mm thick upstand
UP8	100mm thick upstand
UP9	175mm thick upstand
UP10	330mm thick upstand
UP11	163mm thick upstand
UP12	300mm thick upstand

Mass concrete to fill gap between column and retaining wall.



-  Denotes Structural thermal break cantilever between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
-  Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
-  Denotes 60mm Dia hole U.N.O for overflow pipe (Refer to Architect's drawings for level and setting out).

MH Denotes Manhole. Refer to underground drainage drawings for manhole setting out.

Arup Job No	Rev
288226-00	C04
ID	
H8656-ARU-A4-LG-DR-SE-20402	


Concrete Column Schedule	
ID Type Mark	Type
CC2	375 x 375 RC Column
CC4	750 x 450 RC Column
CC5	900 x 450 RC Column
CC6	1050 x 450 RC Column
CC7	1050 x 500 RC Column
CC8	1100 x 500 RC Column
CC9	1100 x 550 RC Column
CC10	1100 x 600 RC Column
CC11	1200 x 300 RC Column
CC12	1200 x 350 RC Column
CC13	1200 x 450 RC Column
CC14	1200 x 500 RC Column
CC15	1350 x 250 RC Column
CC16	1350 x 450 RC Column
CC17	1400 x 400 RC Column
CC18	1400 x 450 RC Column
CC19	1600 x 350 RC Column
CC20	1750 x 300 RC Column
CC21	1750 x 350 RC Column
CC22	400 x 350 RC Column
CC23	450 x 250 RC Column
CC24	500 x 250 RC Column
CC25	500 x 350 RC Column
CC26	800 x 250 RC Column
CC27	1000 x 250 RC Column
CC28	As Dimensioned - Refer to Detail
CC29	650 x 350 RC Column
CC30	425 x 425 RC Column
CC31	1090 x 490 RC Column
CC32	1090 x 540 RC Column
CC33	1140 x 640 RC Column
CC34	1150 x 650 RC Column
CC35	1250 x 500 RC Column
CC36	1240 x 540 RC Column
CC37	1250 x 550 RC Column
CC38	1400 x 500 RC Column
CC39	1450 x 500 RC Column
CC40	1800 x 400 RC Column
CC41	1050 x 300 RC Column

Concrete Beam Schedule	
ID Type Mark	Type
CB1	240 x 640dp RC Beam
CB2	400 x 650dp RC Beam
CB3	400 x 890dp RC Beam
CB4	475 x 750dp RC Beam

Note - CB2 to be C50/60 concrete (including slab zone at top of beam) and to be formed as part of RC walls

Wall Schedule	
ID Type Mark	Wall Type
W1	250mm thick wall
W2	300mm thick wall
W3	400mm thick wall

Upstand Schedule	
ID Type Mark	Wall Type
UP1	140mm thick upstand
UP2	150mm thick upstand
UP4	200mm thick upstand
UP5	215mm thick upstand
UP6	250mm thick upstand
UP7	400mm thick upstand
UP8	100mm thick upstand
UP9	175mm thick upstand
UP10	330mm thick upstand
UP11	163mm thick upstand
UP12	300mm thick upstand

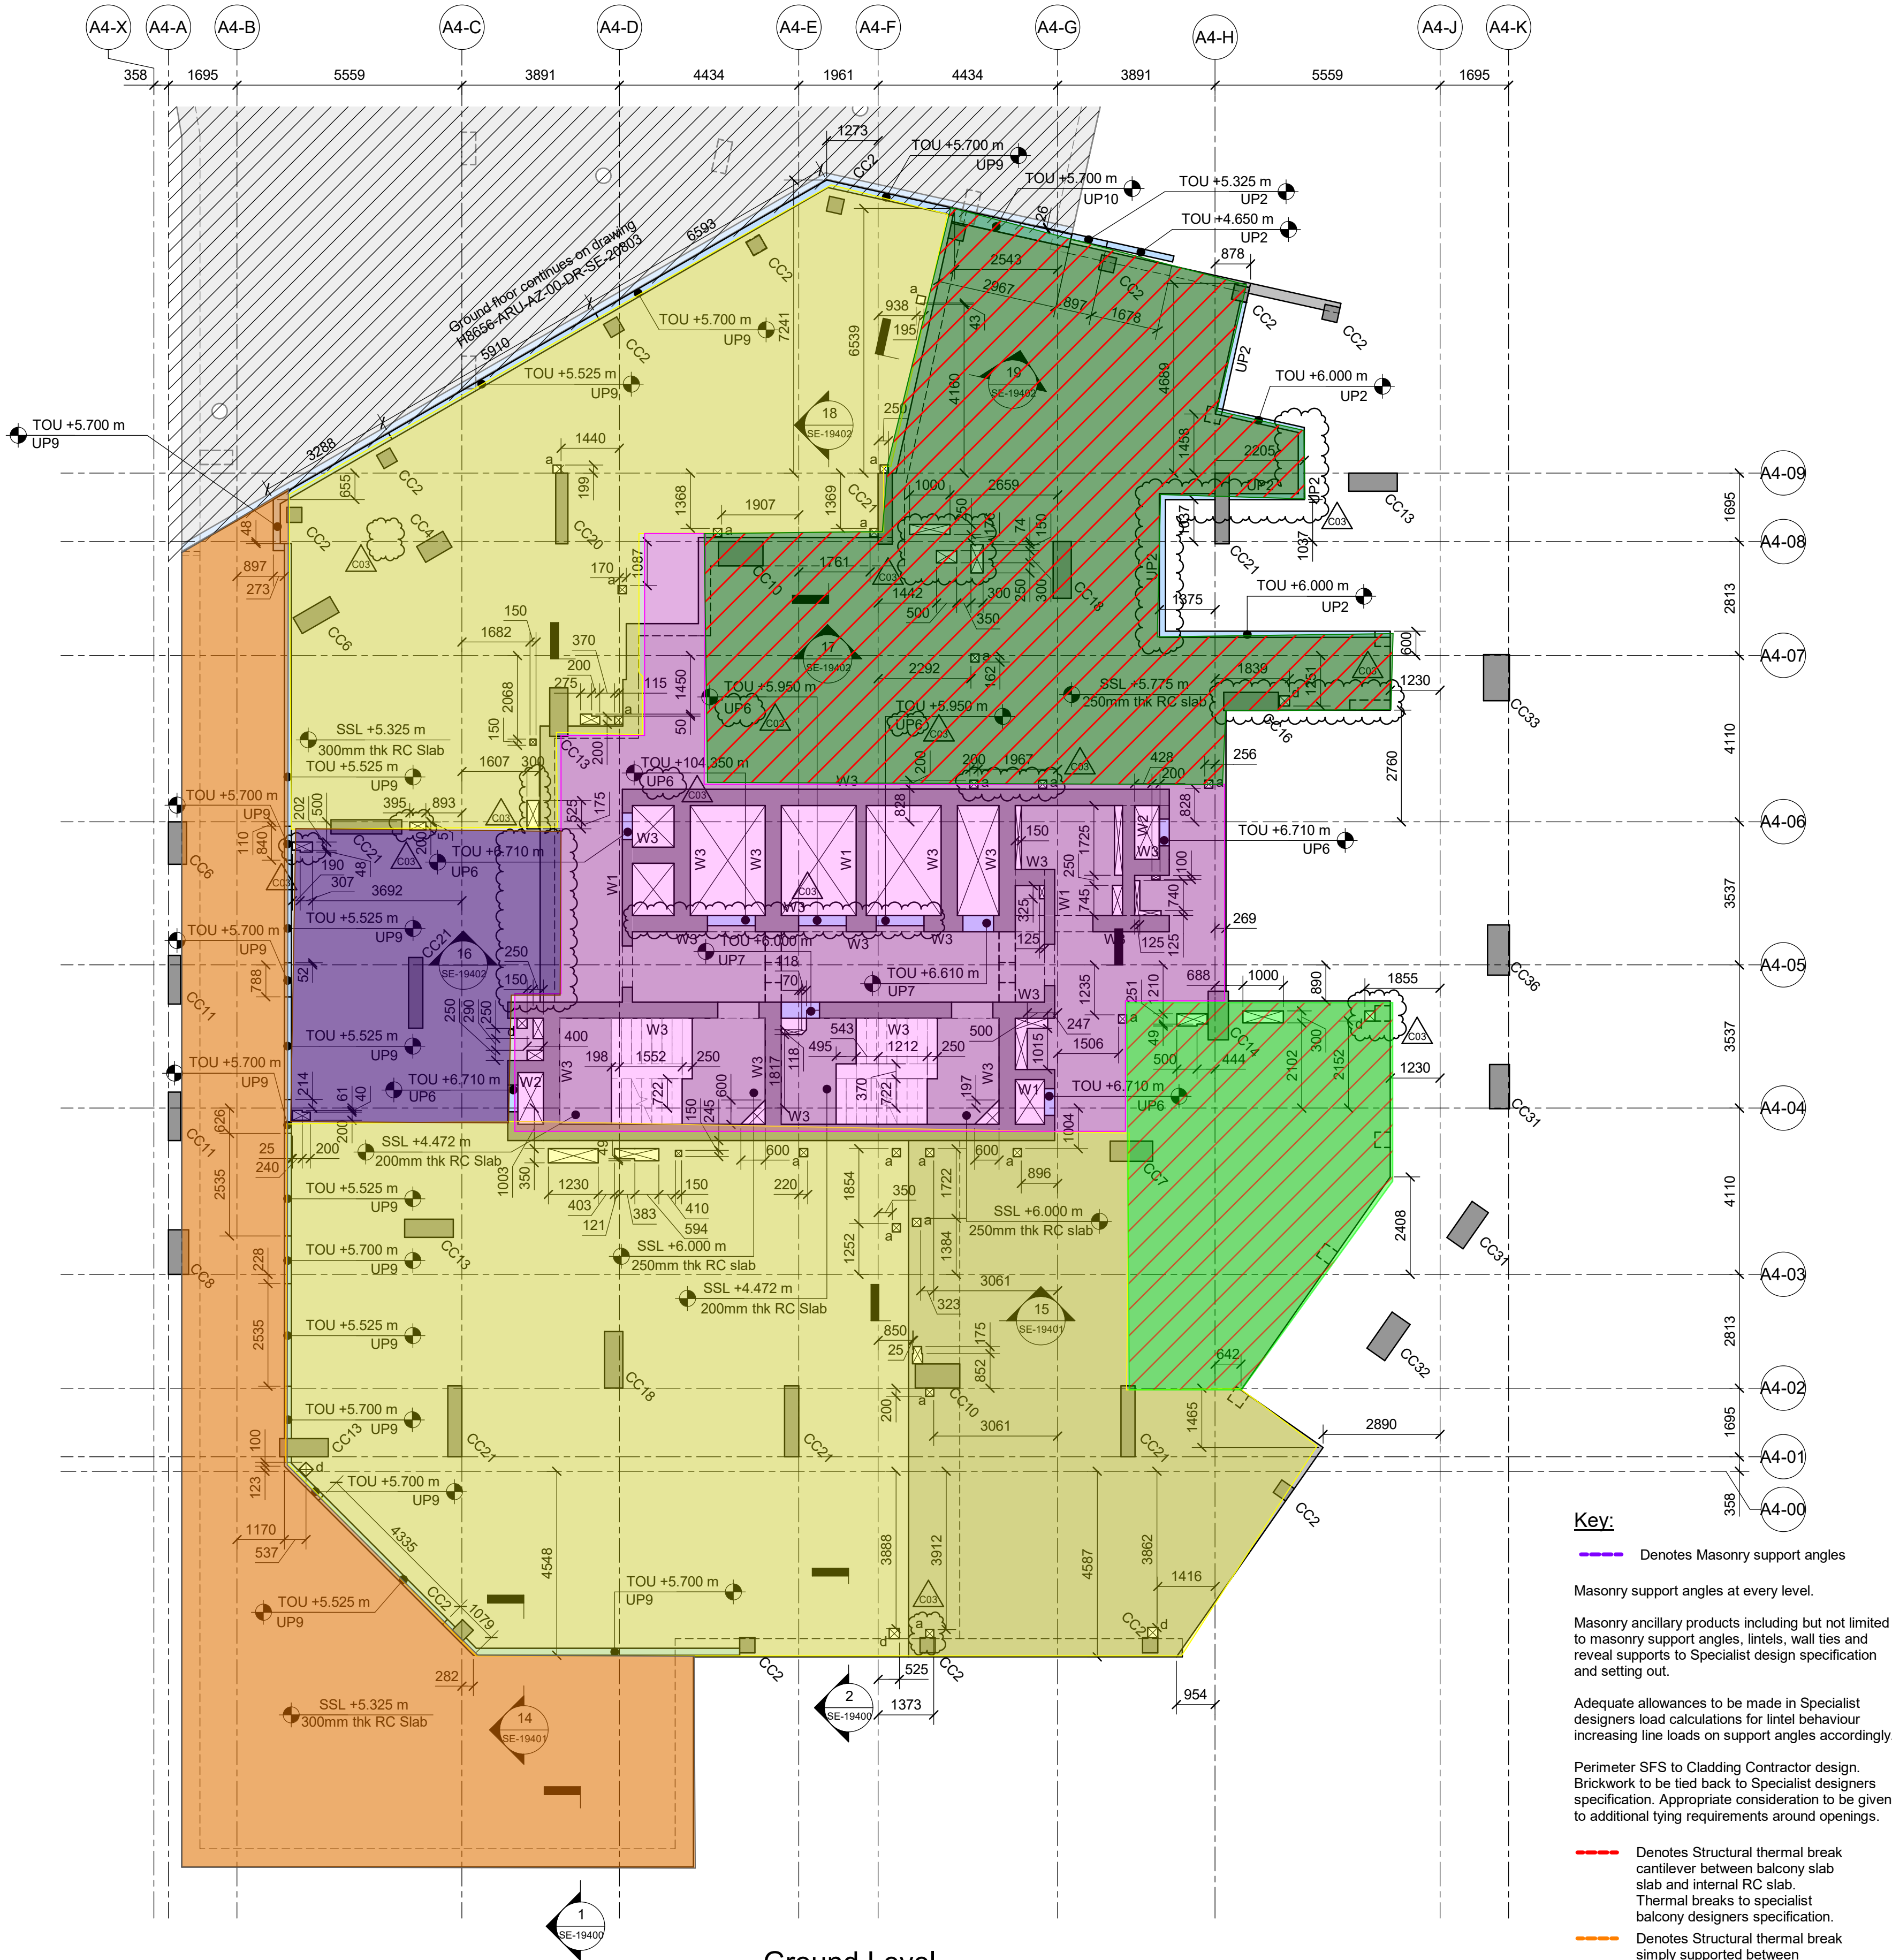

Ground Level

Scale 1 : 100

Notes:

1. Drawings to be read in conjunction with all relevant architects and engineers drawings and specifications.
2. For structural notes refer to drawings: H8656-ARP-ZZ-ZR-SE-00001.
3. All dimensions are in mm unless noted otherwise.
4. Do not scale this drawing.
5. Detailed pile design is by subcontractor.
6. RC columns and walls to be grade C50/60 UNO.
7. RC pile caps to be grade C40/50 U.N.O.
8. RC slabs to be grade C32/40 U.N.O.
9. RC retaining walls to be grade C32/40 U.N.O.
10. Layout based on Architectural layouts and models as at 15/05/2025

Loading Key:

- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
- Balconies > SDL = 1.0kPa, IL = 2.5kPa
- Roof > SDL = 3.0kPa, IL = 1.5kPa
- Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
- Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
- Podium >SDL = 14.5kPa, IL = 5.0kPa
- Gym > SDL = 1.5kPa, IL = 5.0kPa
- Office > SDL = 1.5kPa, IL = 3.0kPa
- Lounge >SDL 1.5kPa, IL = 3.0kPa
- Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
- Storage > SDL = 1.5kPa, IL = 7.5kPa
- Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
- ASHP Roof Load > SDL = 3.0kPa, IL = 4.0kPa
- Gym > SDL = 3.0kPa, IL = 5.0kPa

Notes :

- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
- internal blockwork walls as per Arch. drawings

Builders Work Hole Key

Refer to level below for setting out if no dimensions at current level.

- a 200x200mm Void through slab
- b 200x400mm Void through slab
- c 200x600mm Void through slab
- d 250x250mm Void through slab
- e 1230x250mm Void through slab
- f 110mm Dia. Void through slab with cast in balcony outlet above.
- g 377mm Dia. Void through slab
- h 300x300mm Void through slab

Builderswork openings for drainage pipework to be formed using Hilti fire collars except on roofs. Gullies to be cast-in. Refer to Architect and MEP consultant drawings for location and specification.

Overall opening sizes, including any provision of manifolds for offsets, must not exceed the overall size indicated on the Structural Drawings

Key:

Denotes Masonry support angles

Masonry support angles at every level.

Masonry ancillary products including but not limited to masonry support angles, lintels, wall ties and reveal supports to Specialist design specification and setting out.

Adequate allowances to be made in Specialist designers load calculations for lintel behaviour increasing line loads on support angles accordingly.

Perimeter SFS to Cladding Contractor design. Brickwork to be tied back to Specialist designers specification. Appropriate consideration to be given to additional tying requirements around openings.

Denotes Structural thermal break cantilever between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.

Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.

Denotes 60mm Dia hole U.N.O for overflow pipe (Refer to Architect's drawings for level and setting out)

Denotes 100mm recess in slab for future shower tray installation. TOC = SSL - 100mm

Denotes Slab with sloping top surface. Soffit level flat. Refer to plans for level variation.

Denotes Lift Entrance Recesses

Denotes RC Upstand

* Denotes Column partially concealed in wall. Refer to reinforcement drawings for detailing.

MH Denotes Manhole. Refer to underground drainage drawings for manhole setting out.

ARUP

1 West Regent Street
Glasgow G2 1RW
Tel +44(0)141 332 8534
www.arup.com

Client

Barratt East London

Project Title

Crown Wharf Canning Town
Block A4

Drawing Title

Block A4
General Arrangement
Ground Floor

Scale at A1 As indicated

Dsg/Drw/Chkd/Appd
KM/LH/SB/GH

Role

Structural

Status

S5 - Suitable for Stage Approval

Arup Job No

288226-00

Rev

C02

ID

H8656-ARU-A4-00-DR-SE-20403


Concrete Column Schedule	
ID Type Mark	Type
CC2	375 x 375 RC Column
CC4	750 x 450 RC Column
CC5	900 x 450 RC Column
CC6	1050 x 450 RC Column
CC7	1050 x 500 RC Column
CC8	1100 x 500 RC Column
CC9	1100 x 550 RC Column
CC10	1100 x 600 RC Column
CC11	1200 x 300 RC Column
CC12	1200 x 350 RC Column
CC13	1200 x 450 RC Column
CC14	1200 x 500 RC Column
CC15	1350 x 250 RC Column
CC16	1350 x 450 RC Column
CC17	1400 x 400 RC Column
CC18	1400 x 450 RC Column
CC19	1600 x 350 RC Column
CC20	1750 x 300 RC Column
CC21	1750 x 350 RC Column
CC22	400 x 350 RC Column
CC23	450 x 250 RC Column
CC24	500 x 250 RC Column
CC25	500 x 350 RC Column
CC26	800 x 250 RC Column
CC27	1000 x 250 RC Column
CC28	As Dimensioned - Refer to Detail
CC29	650 x 350 RC Column
CC30	425 x 425 RC Column
CC31	1090 x 490 RC Column
CC32	1090 x 540 RC Column
CC33	1140 x 640 RC Column
CC34	1150 x 650 RC Column
CC35	1250 x 500 RC Column
CC36	1240 x 540 RC Column
CC37	1250 x 550 RC Column
CC38	1400 x 500 RC Column
CC39	1450 x 500 RC Column
CC40	1800 x 400 RC Column
CC41	1050 x 300 RC Column

Concrete Beam Schedule	
ID Type Mark	Type
CB1	240 x 640dp RC Beam
CB2	400 x 650dp RC Beam
CB3	400 x 890dp RC Beam
CB4	475 x 750dp RC Beam


Note - CB2 to be C50/60 concrete (including slab zone at top of beam) and to be formed as part of RC walls

Wall Schedule	
ID Type Mark	Wall Type
W1	250mm thick wall
W2	300mm thick wall
W3	400mm thick wall

Upstand Schedule	
ID Type Mark	Wall Type
UP1	140mm thick upstand
UP2	150mm thick upstand
UP4	200mm thick upstand
UP5	215mm thick upstand
UP6	250mm thick upstand
UP7	400mm thick upstand
UP8	100mm thick upstand
UP9	175mm thick upstand
UP10	330mm thick upstand
UP11	163mm thick upstand
UP12	300mm thick upstand

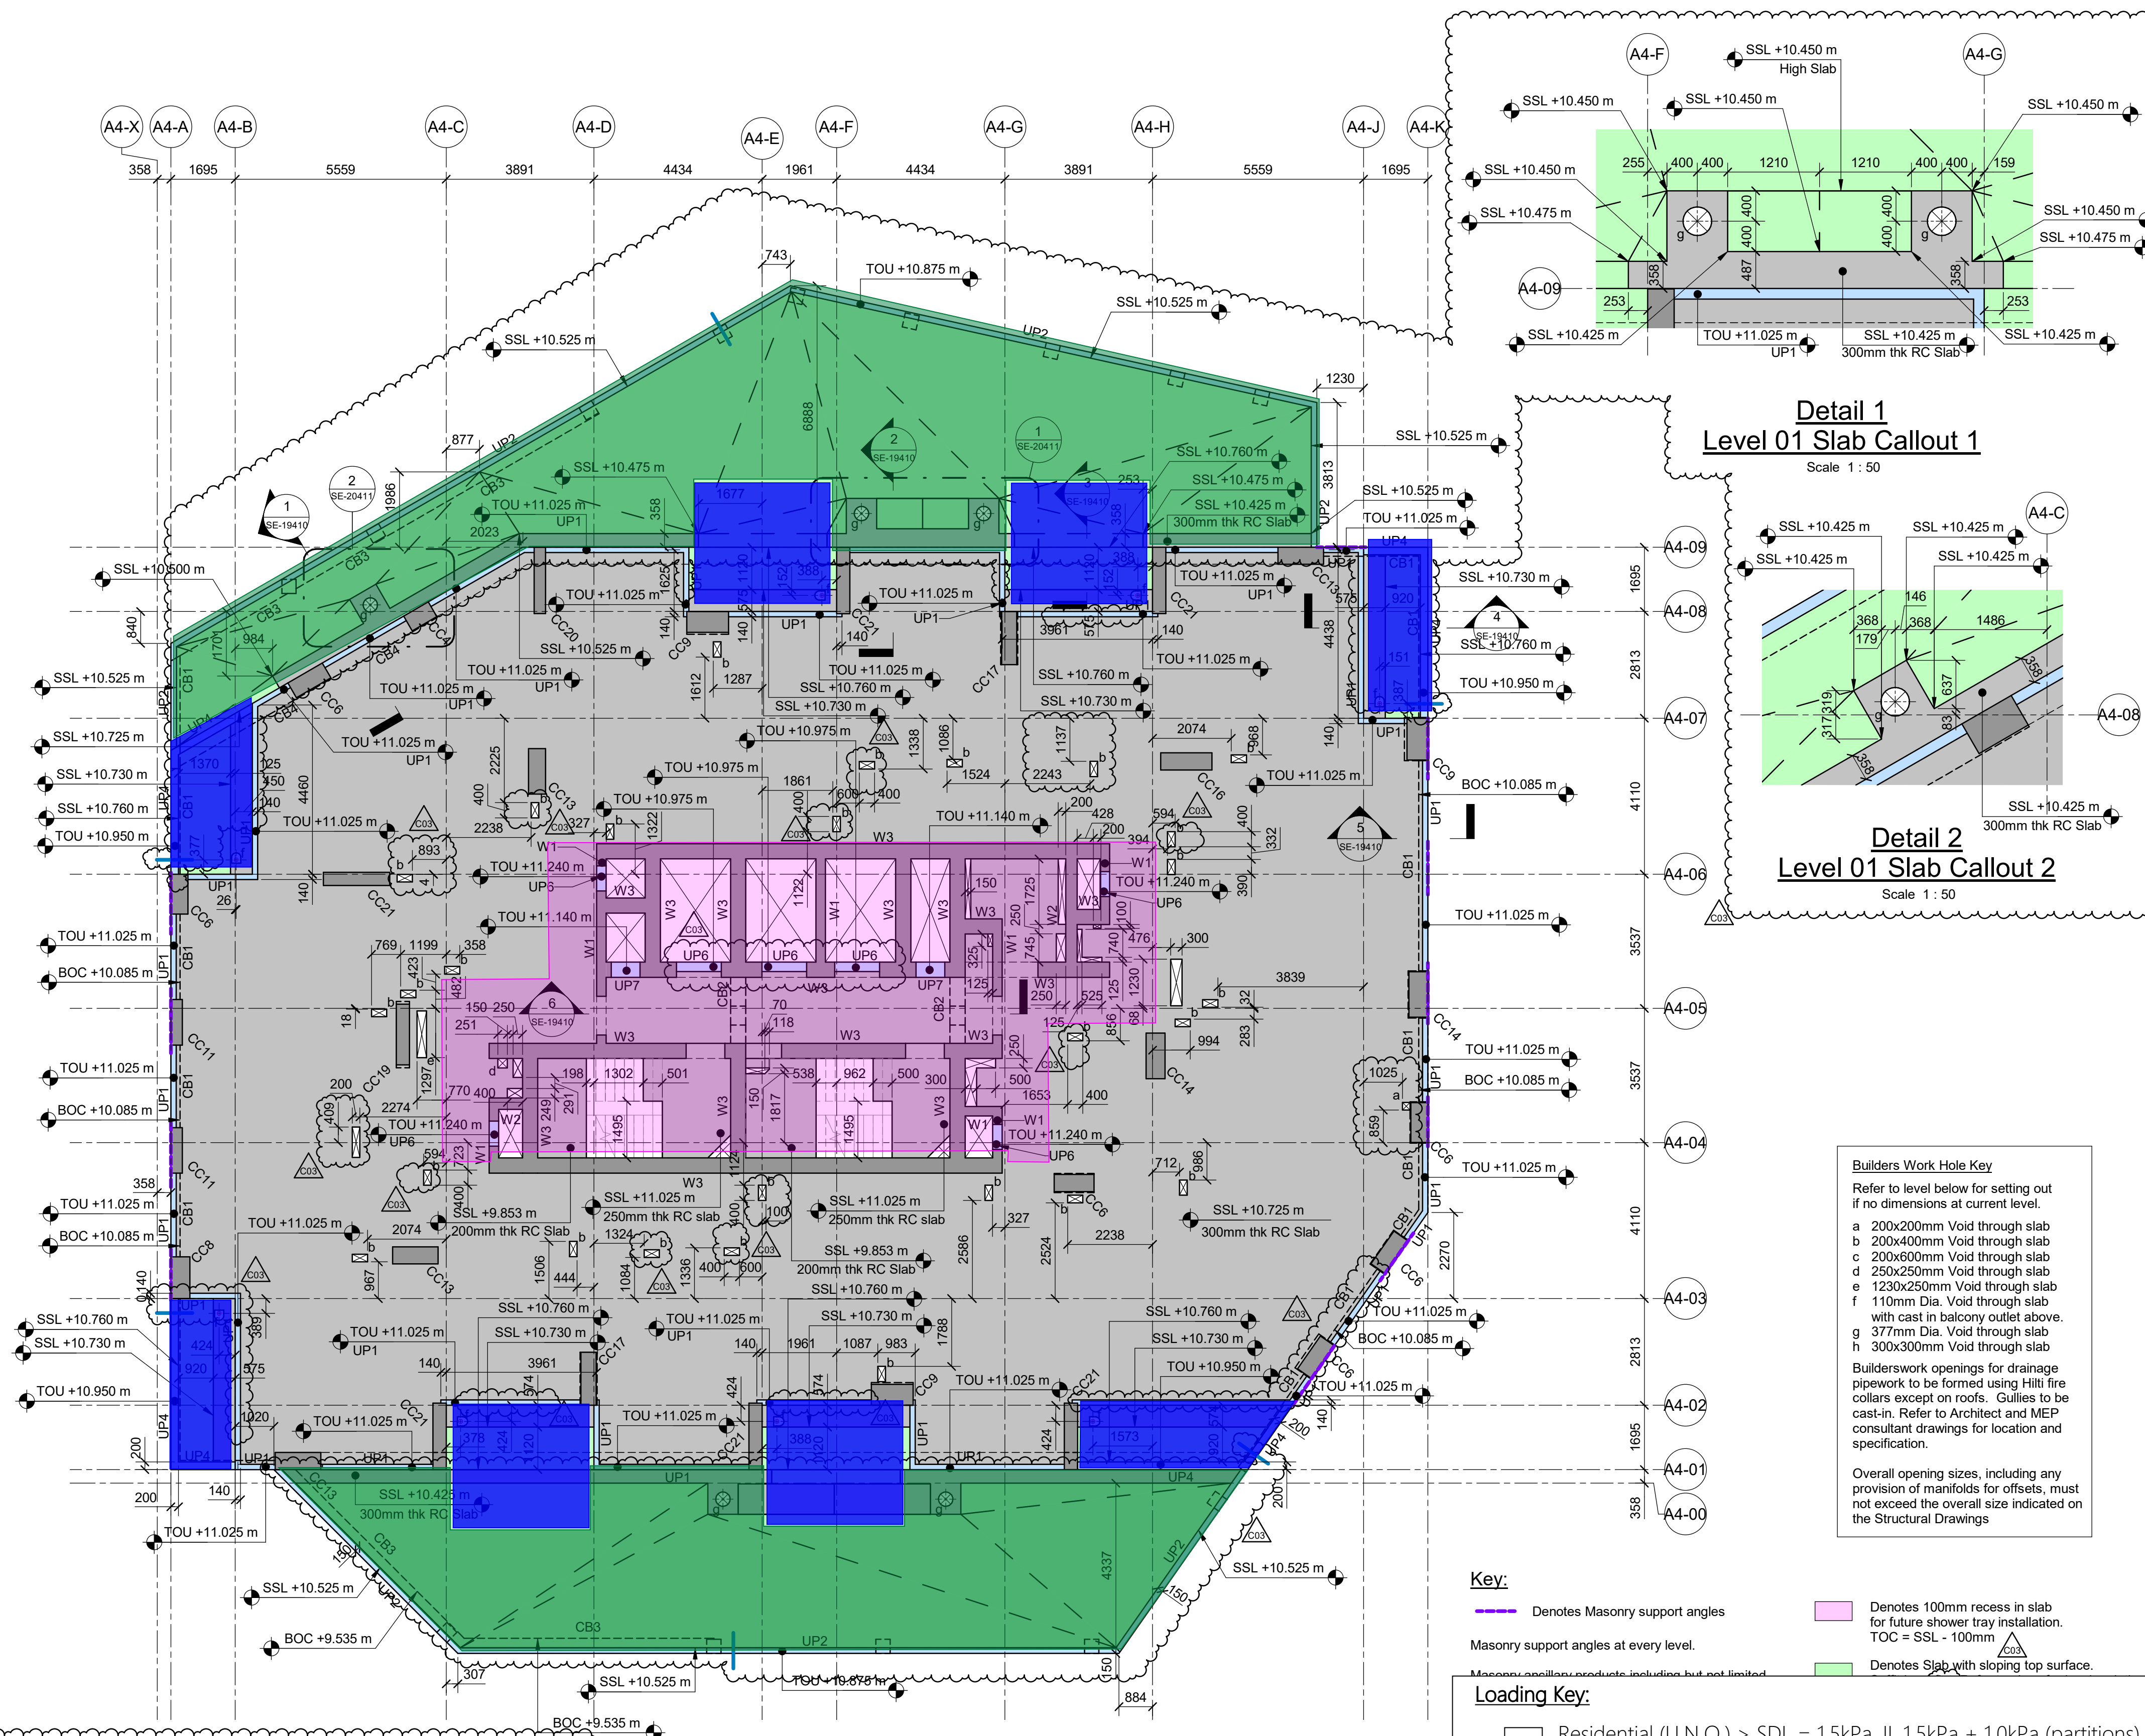

Level 01 Layout
Scale 1 : 100

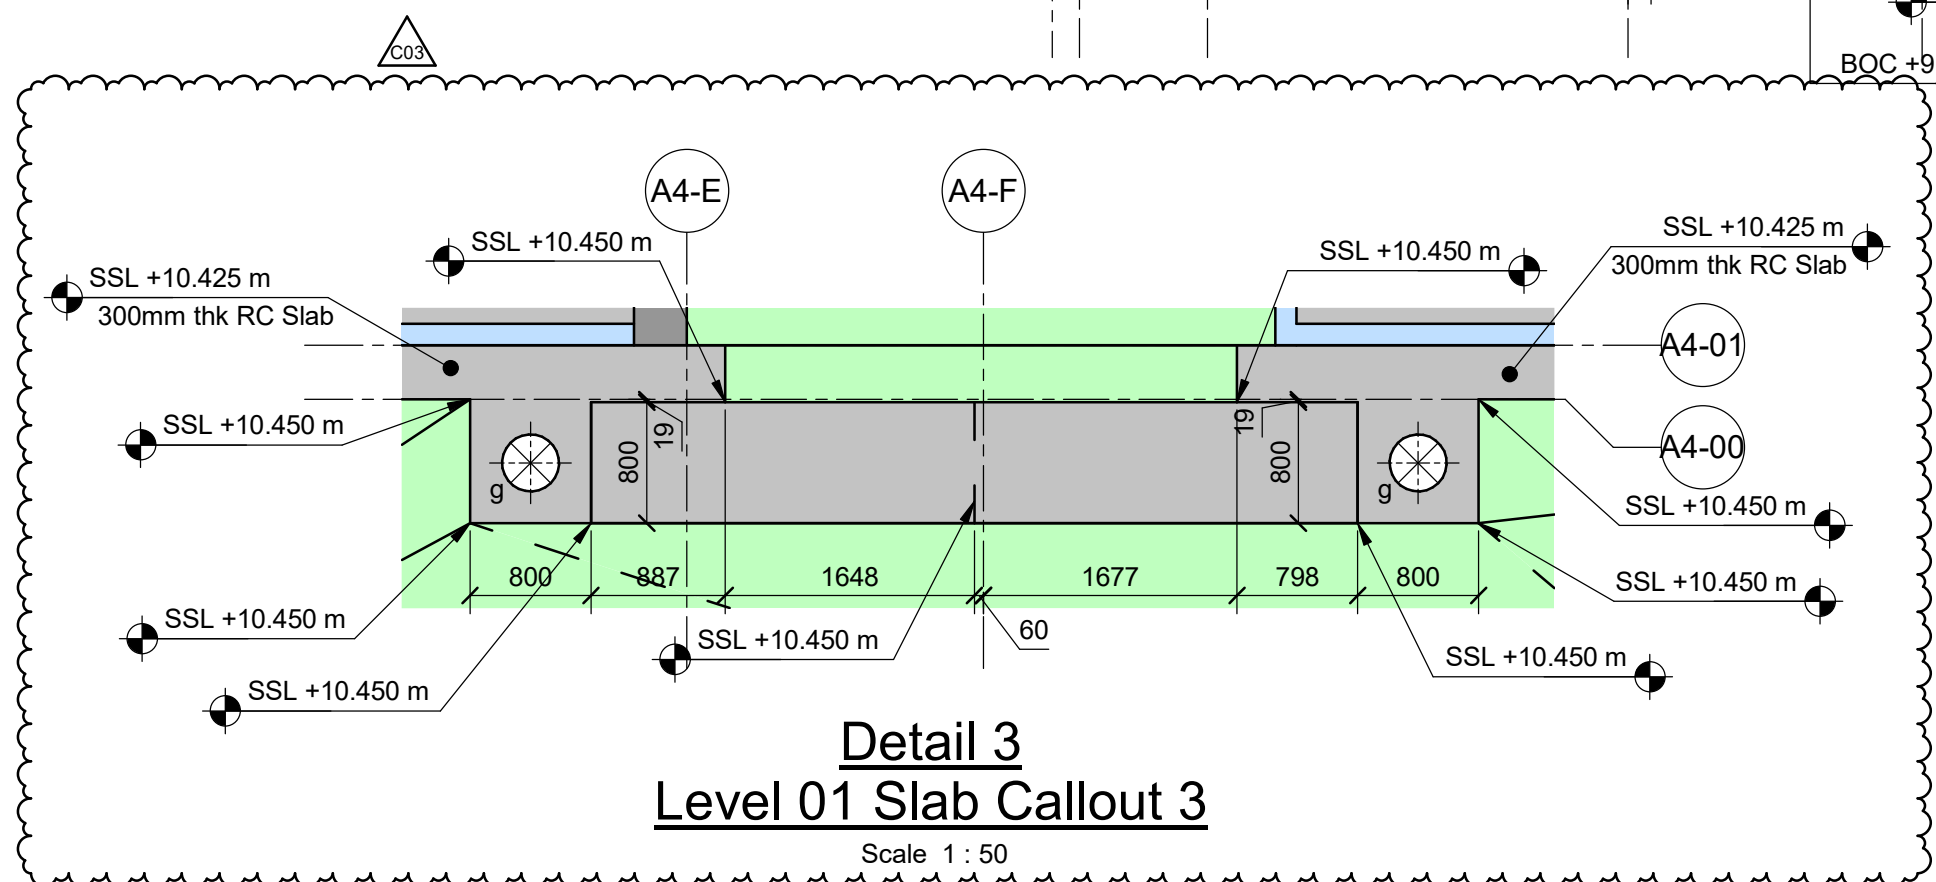

Detail 3
Level 01 Slab Callout 3
Scale 1 : 50

Detail 1
Level 01 Slab Callout 1
Scale 1 : 50

Detail 2
Level 01 Slab Callout 2
Scale 1 : 50

Builders Work Hole Key

Refer to level below for setting out if no dimensions at current level.

- a 200x200mm Void through slab
- b 200x400mm Void through slab
- c 200x600mm Void through slab
- d 250x250mm Void through slab
- e 1230x250mm Void through slab
- f 110mm Dia. Void through slab with cast in balcony outlet above.
- g 377mm Dia. Void through slab
- h 300x300mm Void through slab

Builderswork openings for drainage pipework to be formed using Hilti fire collars except on roofs. Gullies to be cast-in. Refer to Architect and MEP consultant drawings for location and specification.

Overall opening sizes, including any provision of manifolds for offsets, must not exceed the overall size indicated on the Structural Drawings

Key:

Denotes Masonry support angles

Masonry support angles at every level.

Masonry ancillary products including but not limited to

Denotes 100mm recess in slab for future shower tray installation. TOC = SSL - 100mm

Denotes Slab with sloping top surface.

Loading Key:

- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
- Balconies > SDL = 1.0kPa, IL = 2.5kPa
- Roof > SDL = 3.0kPa, IL = 1.5kPa
- Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
- Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
- Podium > SDL = 14.5kPa, IL = 5.0kPa
- Gym > SDL = 1.5kPa, IL = 5.0kPa
- Office > SDL = 1.5kPa, IL = 3.0kPa
- Lounge > SDL 1.5kPa, IL = 3.0kPa
- Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
- Storage > SDL = 1.5kPa, IL = 7.5kPa
- Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
- ASHP Roof Load > SDL = 3.0kPa, IL = 4 kPa

Notes :

- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
- internal blockwork walls as per Arch. drawings

Notes:

1. Drawings to be read in conjunction with all relevant architects and engineers drawings and specifications.
2. For structural notes refer to drawings: H8656-ARP-ZZ-ZR-SE-00001.
3. All dimensions are in mm unless noted otherwise.
4. Do not scale this drawing.
5. RC columns and walls to be grade C50/60 UNO.
6. RC pile caps to be grade C40/50 U.N.O.
7. RC slabs to be grade C32/40 U.N.O.
8. RC retaining walls to be grade C32/40 U.N.O.
9. Layout based on Architectural layouts and models as at 16/05/2025

ARUP

1 West Regent Street
Glasgow G2 1RW
Tel +44(0)141 332 8534
www.arup.com

Client

Barratt East London

Project Title

Crown Wharf Canning Town
Block A4

Drawing Title

Block A4
General Arrangement
Level 01

Scale at A1 As indicated

Dsg/Drw/Chkd/Appd
KM/LH/SB/GH

Role Structural

Status S5 - Suitable for Stage Approval

Arup Job No

288226-00

Rev

C03

ID

H8656-ARU-A4-01-DR-SE-20411

Concrete Column Schedule	
ID Type Mark	Type
CC2	375 x 375 RC Column
CC4	750 x 450 RC Column
CC5	900 x 450 RC Column
CC6	1050 x 450 RC Column
CC7	1050 x 500 RC Column
CC8	1100 x 500 RC Column
CC9	1100 x 550 RC Column
CC10	1100 x 600 RC Column
CC11	1200 x 300 RC Column
CC12	1200 x 350 RC Column
CC13	1200 x 450 RC Column
CC14	1200 x 500 RC Column
CC15	1350 x 250 RC Column
CC16	1350 x 450 RC Column
CC17	1400 x 400 RC Column
CC18	1400 x 450 RC Column
CC19	1600 x 350 RC Column
CC20	1750 x 300 RC Column
CC21	1750 x 350 RC Column
CC22	400 x 350 RC Column
CC23	450 x 250 RC Column
CC24	500 x 250 RC Column
CC25	500 x 350 RC Column
CC26	800 x 250 RC Column
CC27	1000 x 250 RC Column
CC28	As Dimensioned - Refer to Detail
CC29	650 x 350 RC Column
CC30	425 x 425 RC Column
CC31	1090 x 490 RC Column
CC32	1090 x 540 RC Column
CC33	1140 x 640 RC Column
CC34	1150 x 650 RC Column
CC35	1250 x 500 RC Column
CC36	1240 x 540 RC Column
CC37	1250 x 550 RC Column
CC38	1400 x 500 RC Column
CC39	1450 x 500 RC Column
CC40	1800 x 400 RC Column
CC41	1050 x 300 RC Column

Concrete Beam Schedule	
ID Type Mark	Type
CB1	240 x 640dp RC Beam
CB2	400 x 650dp RC Beam
CB3	400 x 890dp RC Beam
CB4	475 x 750dp RC Beam

Note - CB2 to be C50/60 concrete (including slab zone at top of beam) and to be formed as part of RC walls

Wall Schedule	
ID Type Mark	Wall Type
W1	250mm thick wall
W2	300mm thick wall
W3	400mm thick wall


Upstand Schedule	
ID Type Mark	Wall Type
UP1	140mm thick upstand
UP2	150mm thick upstand
UP4	200mm thick upstand
UP5	215mm thick upstand
UP6	250mm thick upstand
UP7	400mm thick upstand
UP8	100mm thick upstand
UP9	175mm thick upstand
UP10	330mm thick upstand
UP11	163mm thick upstand
UP12	300mm thick upstand
UP13	185mm thick upstand

Loading Key:

- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
- Balconies > SDL = 1.0kPa, IL = 2.5kPa
- Roof > SDL = 3.0kPa, IL = 1.5kPa
- Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
- Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
- Podium >SDL = 14.5kPa, IL = 5.0kPa
- Gym > SDL = 1.5kPa, IL = 5.0kPa
- Office > SDL = 1.5kPa, IL = 3.0kPa
- Lounge >SDL 1.5kPa, IL = 3.0kPa
- Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
- Storage > SDL = 1.5kPa, IL = 7.5kPa
- Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
- ASHP Roof Load > SDL = 3.0kPa, IL = 4 kPa

Notes :

- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
- internal blockwork walls as per Arch. drawings

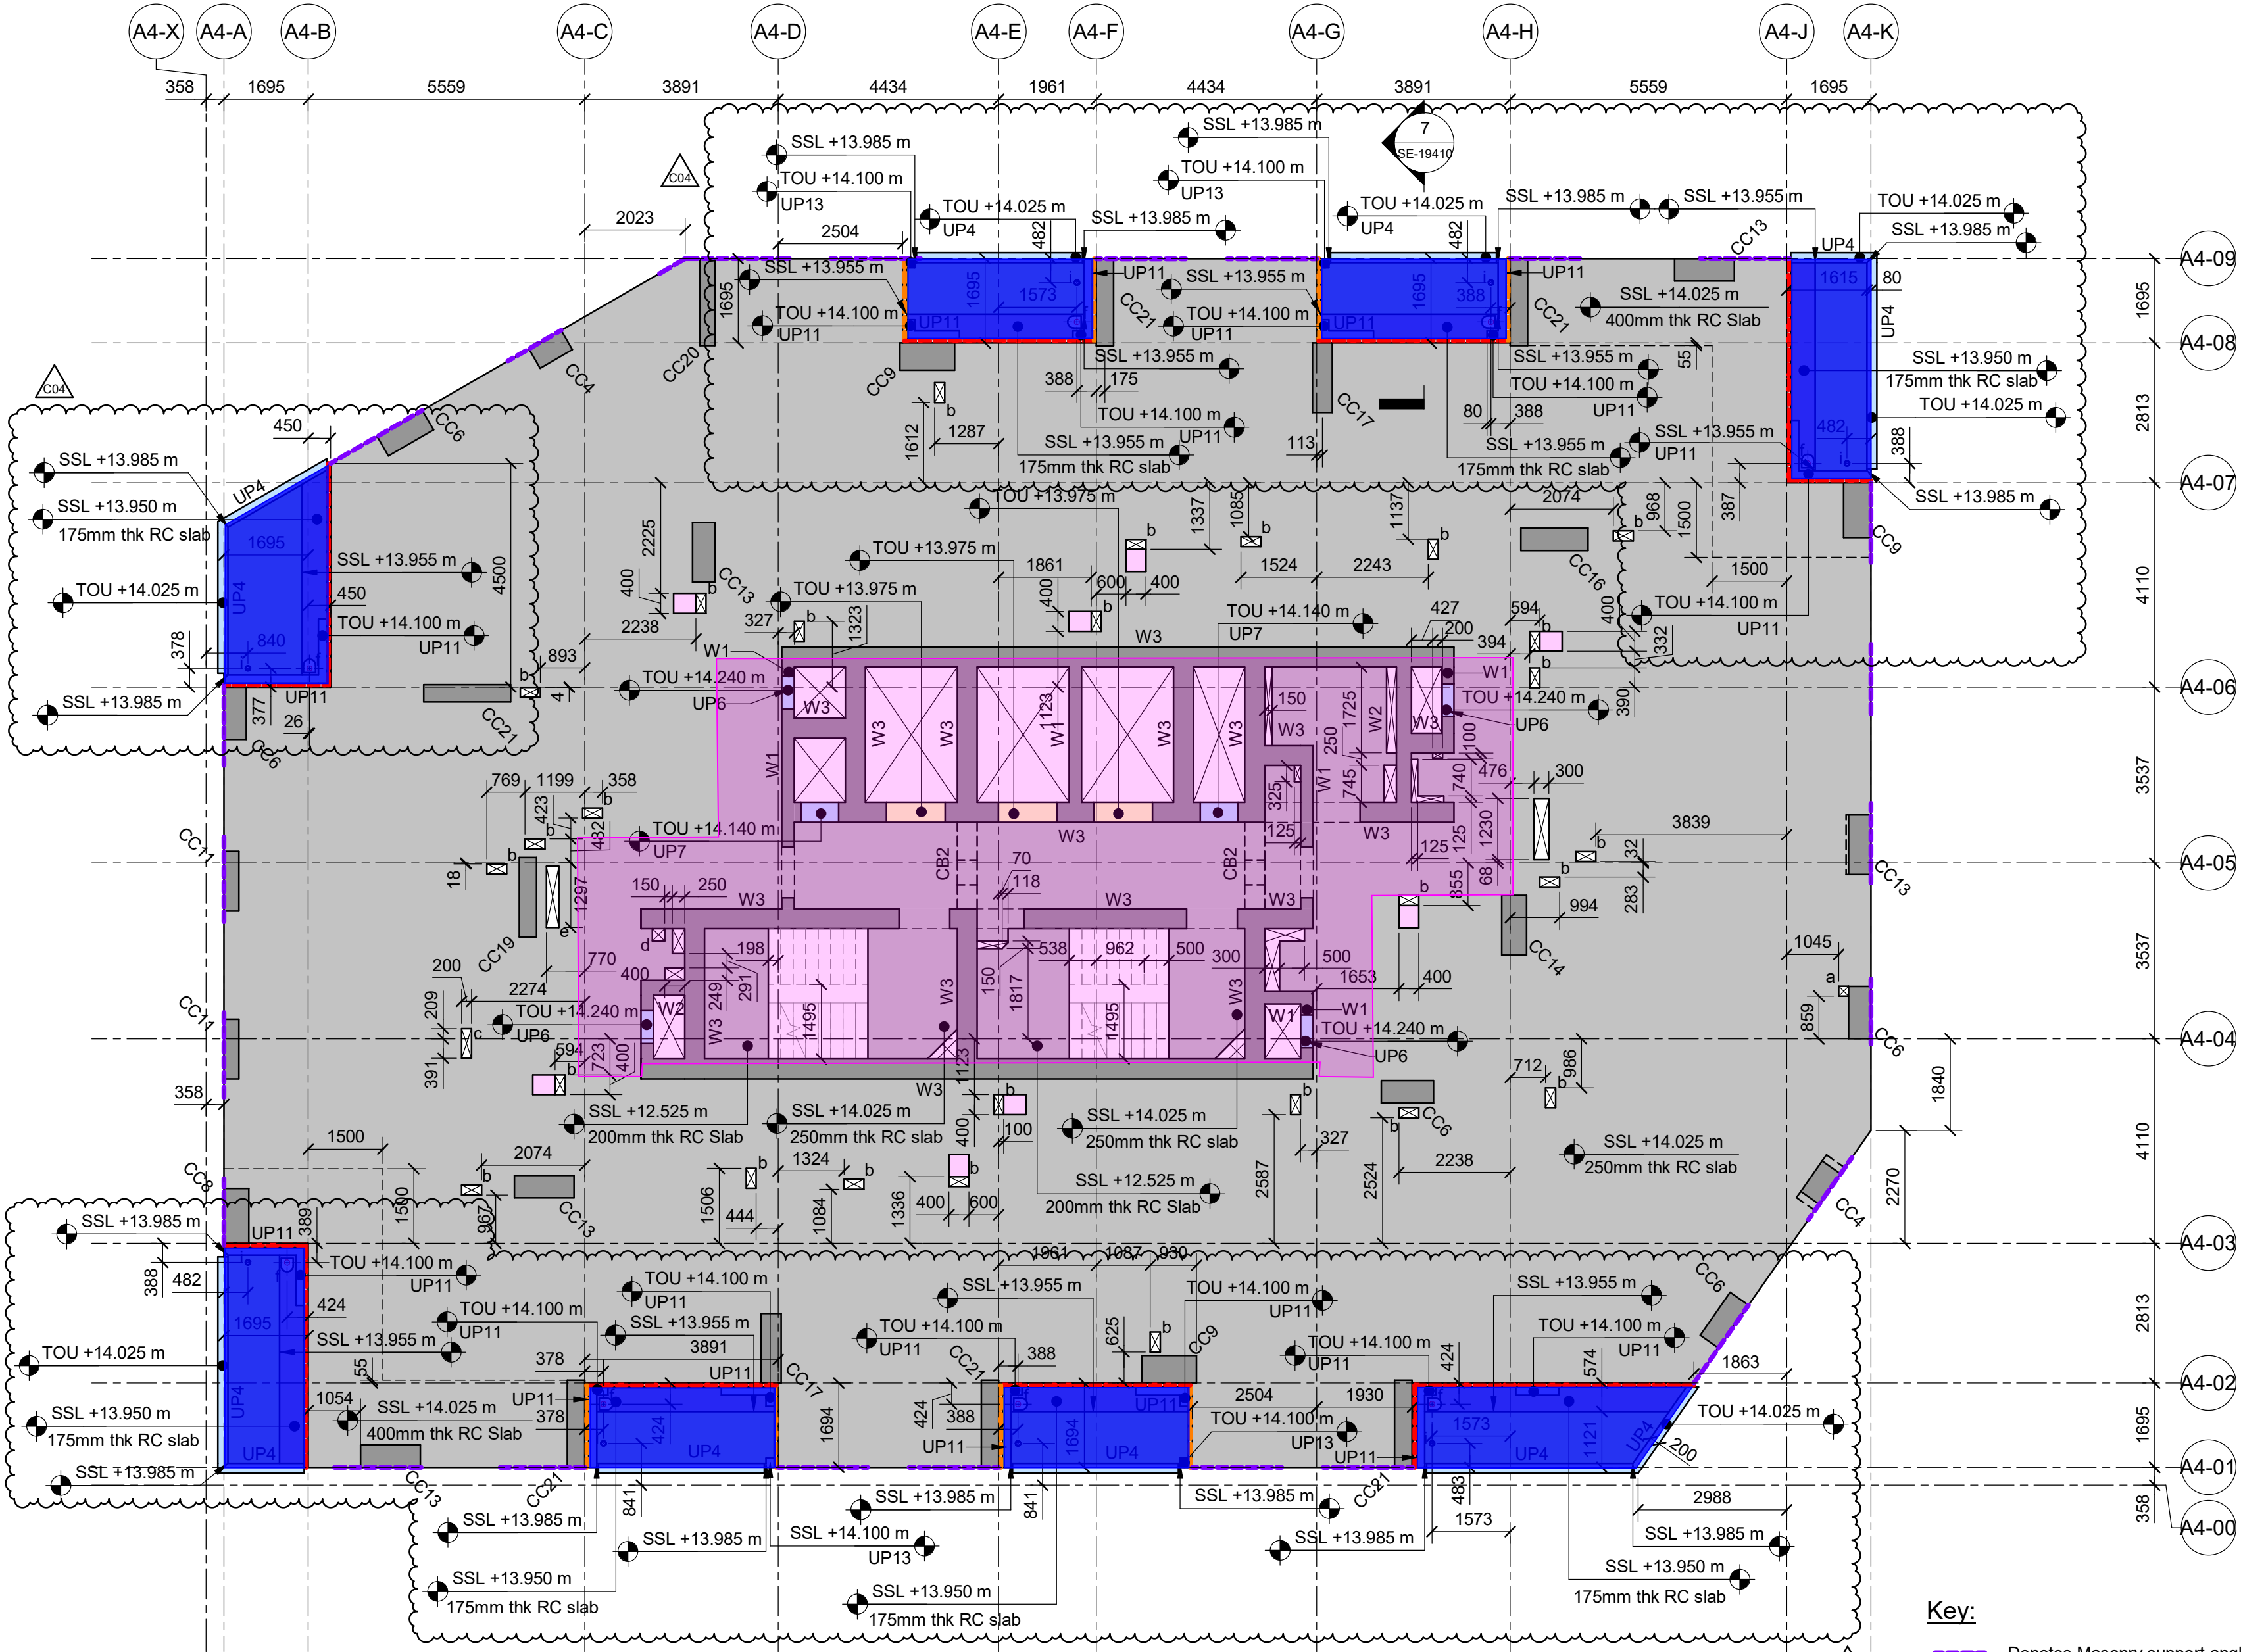

Level 02 Layout

Scale 1 : 100

Key:

Denotes Masonry support angles

Masonry support angles at every level.

Masonry ancillary products including but not limited to masonry support angles, lintels, wall ties and reveal supports to Specialist design specification and setting out.

Adequate allowances to be made in Specialist designers load calculations for lintel behaviour increasing line loads on support angles accordingly.

Perimeter SFS to Cladding Contractor design. Brickwork to be tied back to Specialist designers specification. Appropriate consideration to be given to additional tying requirements around openings.

Denotes Structural thermal break cantilever between balcony slab

Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.

Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.

Denotes 60mm Dia hole U.N.O for overflow pipe (Refer to Architect's drawings for level and setting out)

Builders Work Hole Key

Refer to level below for setting out if no dimensions at current level.

- a 200x200mm Void through slab
 - b 200x400mm Void through slab
 - c 200x600mm Void through slab
 - d 250x250mm Void through slab
 - e 1230x250mm Void through slab
 - f 110mm Dia. Void through slab with cast in balcony outlet above.
 - g 377mm Dia. Void through slab
 - h 300x300mm Void through slab
 - i 100mm Dia. Void through slab
- Builderswork openings for drainage pipework to be formed using Hilti fire collars except on roofs. Gullies to be cast-in. Refer to Architect and MEP consultant drawings for location and specification.

Overall opening sizes, including any provision of manifolds for offsets, must not exceed the overall size indicated on the Structural Drawings

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

CSA

Notes:

- Drawings to be read in conjunction with all relevant architects and engineers drawings and specifications.
- For structural notes refer to drawings: H8656-ARP-ZZ-ZR-SE-00001.
- All dimensions are in mm unless noted otherwise.
- Do not scale this drawing.
- RC columns and walls to be grade C50/60 UNO.
- RC pile caps to be grade C40/50 U.N.O.
- RC slabs to be grade C32/40 U.N.O.
- RC retaining walls to be grade C32/40 U.N.O.
- Layout based on Architectural layouts and models as at 16/05/2025

CO4	04/07/2025	Construction Issue
CO3	29/05/2025	Construction Issue
CO2	28/01/2025	Construction Issue
CO1	10/12/2024	Construction Issue
PO3	29/11/2024	Construction Issue
PO2	10/05/2024	Preliminary Issue
PO1	06/12/2023	Suitable For Information
Issue	Date	Suitable For Information

ARUP

1 West Regent Street
Glasgow G2 1RW
Tel +44(0)141 332 8534
www.arup.com

Client

Barratt East London

Project Title

Crown Wharf Canning Town
Block A4

Drawing Title

Block A4
General Arrangement
Levels 02

Scale at A1	As indicated	Dsg/Drw/Chkd/Appd KM/AE/SB/GH
Role	Structural	
Status	S5 - Suitable for Stage Approval	
Arup Job No	288226-00	Rev C04
ID	H8656-ARU-A4-02-DR-SE-20412	

A1

A

B

C

D

E

F

G

H

I

J

K

L

M

N

1

2

3

4

5

6

7

8

9

10

Concrete Column Schedule	
ID Type Mark	Type
CC2	375 x 375 RC Column
CC4	750 x 450 RC Column
CC5	900 x 450 RC Column
CC6	1050 x 450 RC Column
CC7	1050 x 500 RC Column
CC8	1100 x 500 RC Column
CC9	1100 x 550 RC Column
CC10	1100 x 600 RC Column
CC11	1200 x 300 RC Column
CC12	1200 x 350 RC Column
CC13	1200 x 450 RC Column
CC14	1200 x 500 RC Column
CC15	1350 x 250 RC Column
CC16	1350 x 450 RC Column
CC17	1400 x 400 RC Column
CC18	1400 x 450 RC Column
CC19	1600 x 350 RC Column
CC20	1750 x 300 RC Column
CC21	1750 x 350 RC Column
CC22	400 x 350 RC Column
CC23	450 x 250 RC Column
CC24	500 x 250 RC Column
CC25	500 x 350 RC Column
CC26	800 x 250 RC Column
CC27	1000 x 250 RC Column
CC28	As Dimensioned - Refer to Detail
CC29	650 x 350 RC Column
CC30	425 x 425 RC Column
CC31	1090 x 490 RC Column
CC32	1090 x 540 RC Column
CC33	1140 x 640 RC Column
CC34	1150 x 650 RC Column
CC35	1250 x 500 RC Column
CC36	1240 x 540 RC Column
CC37	1250 x 550 RC Column
CC38	1400 x 500 RC Column
CC39	1450 x 500 RC Column
CC40	1800 x 400 RC Column
CC41	1050 x 300 RC Column

Concrete Beam Schedule	
ID Type Mark	Type
CB1	240 x 640dp RC Beam
CB2	400 x 650dp RC Beam
CB3	400 x 890dp RC Beam
CB4	475 x 750dp RC Beam

Note - CB2 to be C50/60 concrete (including slab zone at top of beam) and to be formed as part of RC walls

Wall Schedule	
ID Type Mark	Wall Type
W1	250mm thick wall
W2	300mm thick wall
W3	400mm thick wall


Upstand Schedule	
ID Type Mark	Wall Type
UP1	140mm thick upstand
UP2	150mm thick upstand
UP4	200mm thick upstand
UP5	215mm thick upstand
UP6	250mm thick upstand
UP7	400mm thick upstand
UP8	100mm thick upstand
UP9	175mm thick upstand
UP10	330mm thick upstand
UP11	163mm thick upstand
UP12	300mm thick upstand
UP13	185mm thick upstand

Loading Key:

- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
- Balconies > SDL = 1.0kPa, IL = 2.5kPa
- Roof > SDL = 3.0kPa, IL = 1.5kPa
- Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
- Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
- Podium >SDL = 14.5kPa, IL = 5.0kPa
- Gym > SDL = 1.5kPa, IL = 5.0kPa
- Office > SDL = 1.5kPa, IL = 3.0kPa
- Lounge >SDL 1.5kPa, IL = 3.0kPa
- Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
- Storage > SDL = 1.5kPa, IL = 7.5kPa
- Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
- ASHP Roof Load > SDL = 3.0kPa, IL = 4 kPa

Notes :

- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
- internal blockwork walls as per Arch. drawings

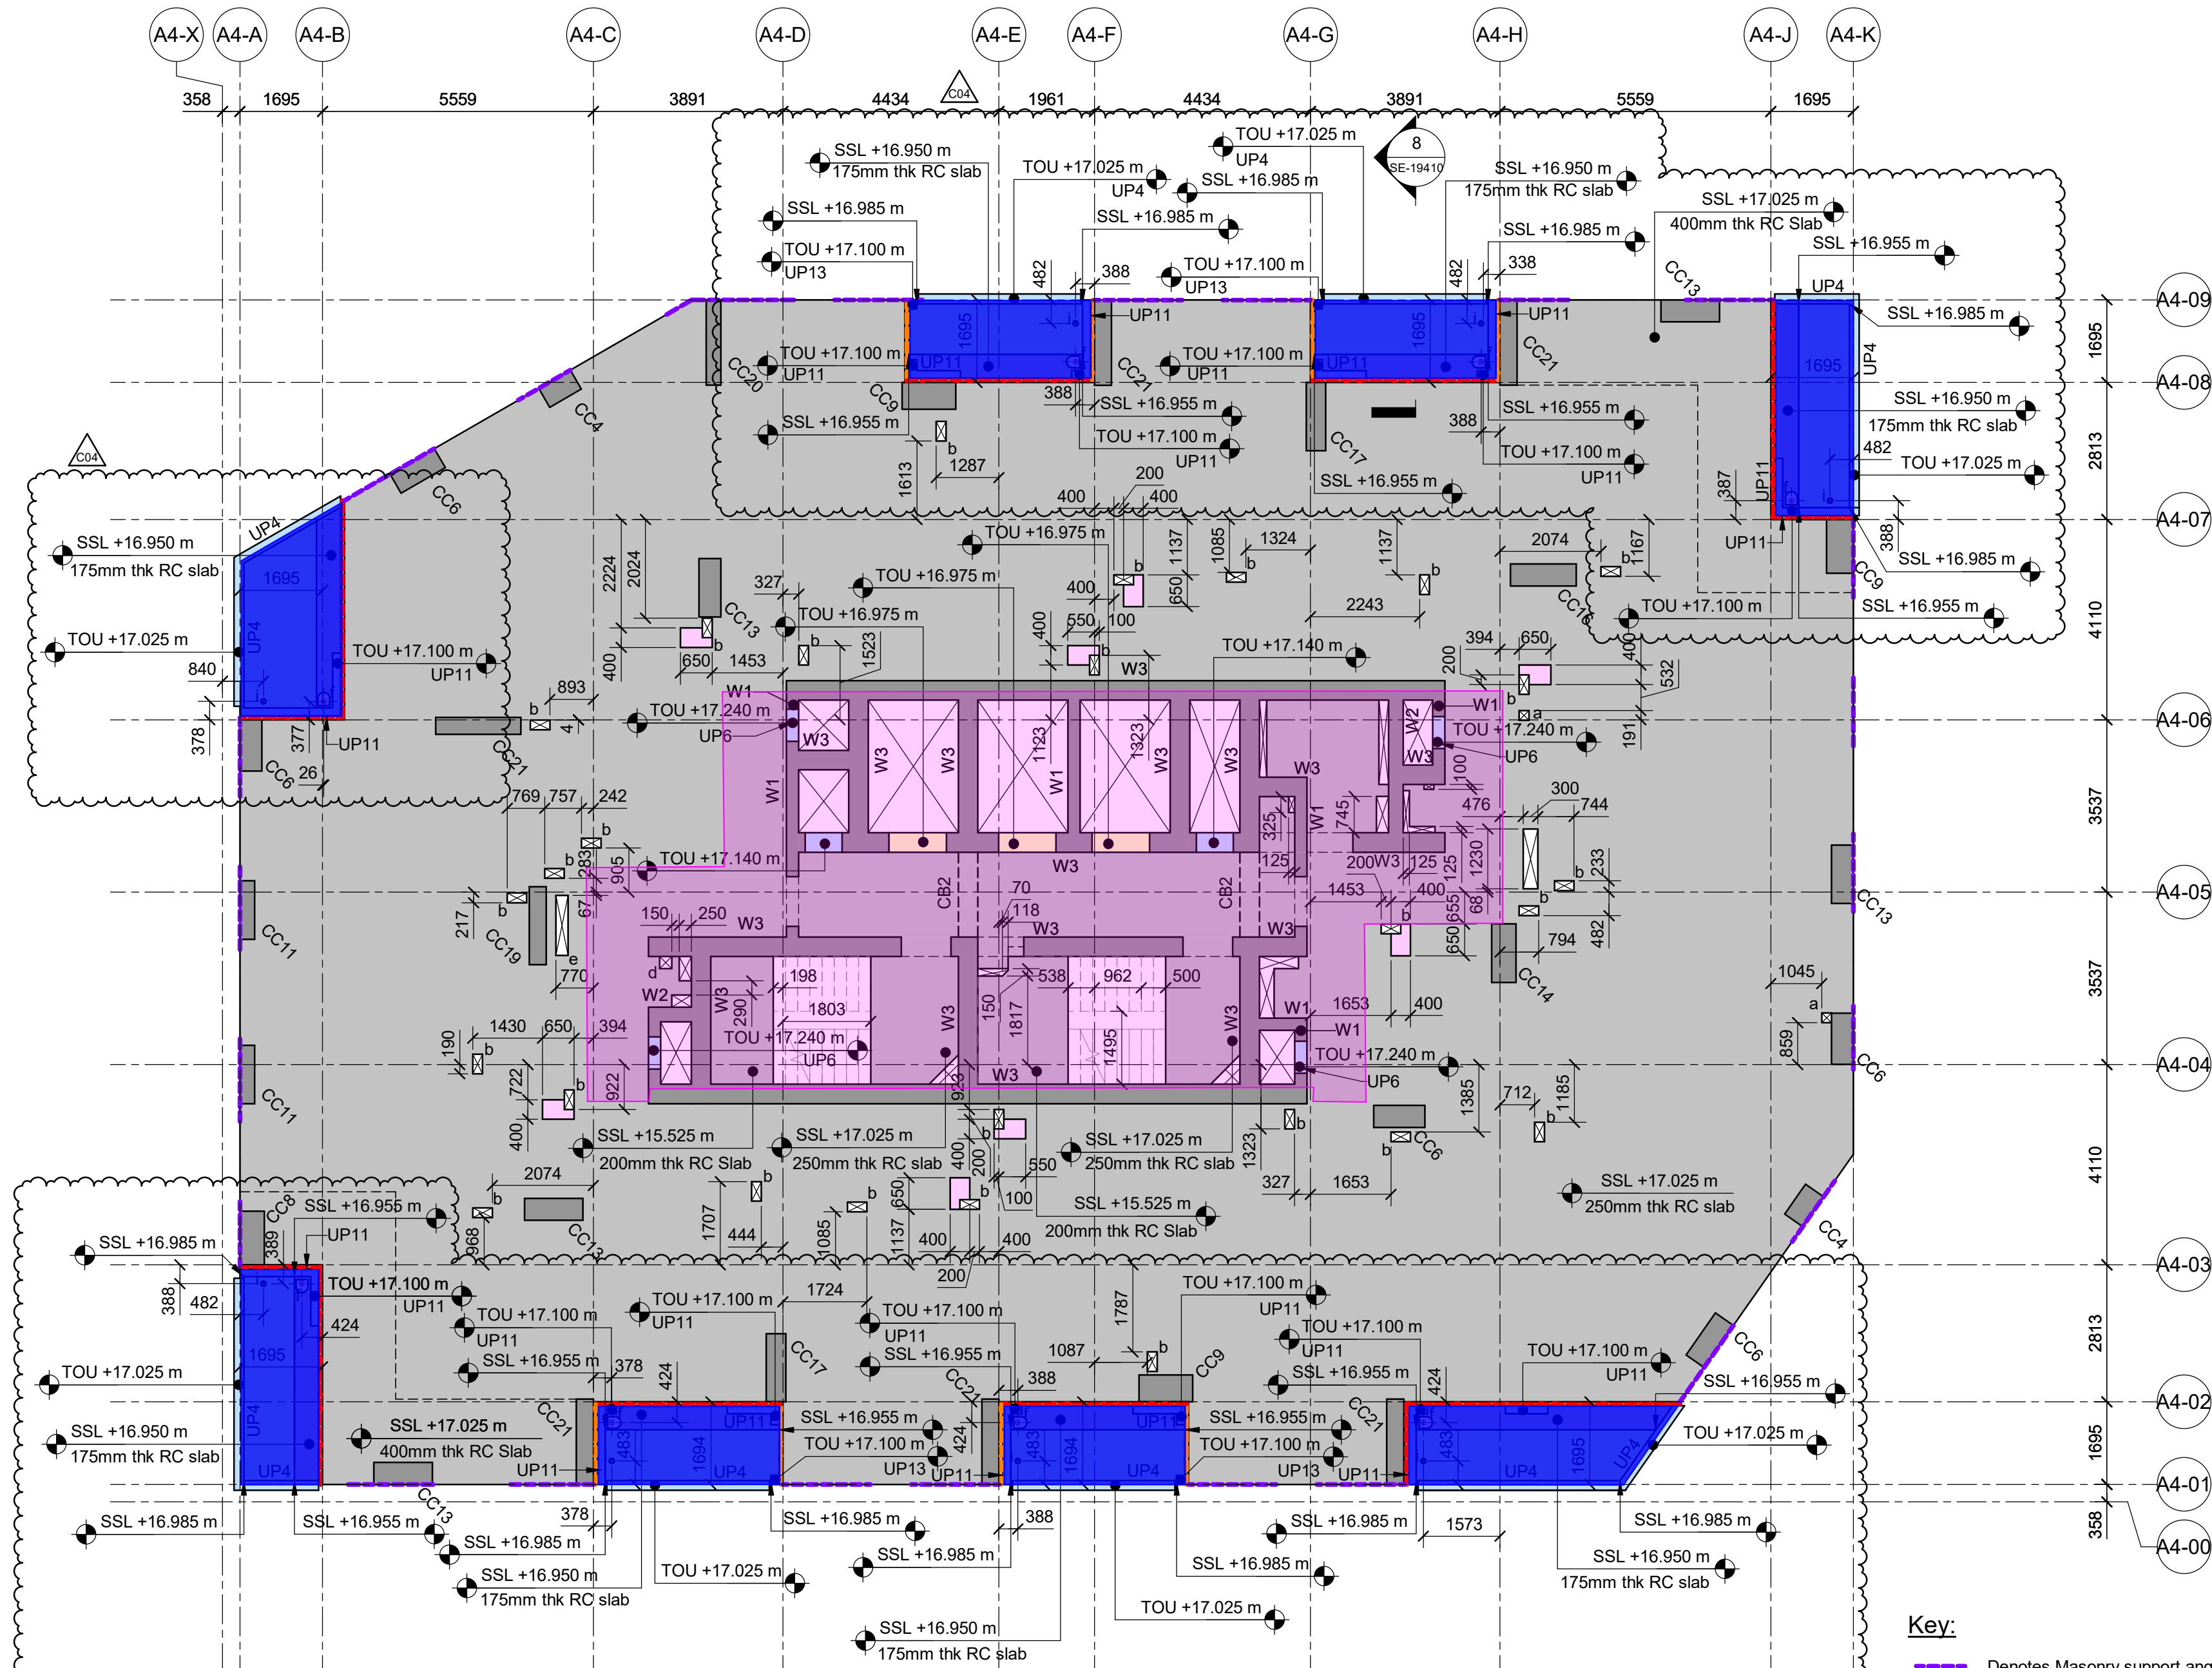

Level 03 Layout

Scale 1 : 100

Key:

Denotes Masonry support angles

Masonry support angles at every level.

Masonry ancillary products including but not limited to masonry support angles, lintels, wall ties and reveal supports to Specialist design specification and setting out.

Adequate allowances to be made in Specialist designers load calculations for lintel behaviour increasing line loads on support angles accordingly.

Perimeter SFS to Cladding Contractor design. Brickwork to be tied back to Specialist designers specification. Appropriate consideration to be given to additional tying requirements around openings.

Denotes Structural thermal break cantilever between balcony slab

Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.

Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.

Denotes 60mm Dia hole U.N.O for overflow pipe (Refer to Architect's drawings for level and setting out)

Builders Work Hole Key

Refer to level below for setting out if no dimensions at current level.

- a 200x200mm Void through slab
 - b 200x400mm Void through slab
 - c 200x600mm Void through slab
 - d 250x250mm Void through slab
 - e 1230x250mm Void through slab
 - f 110mm Dia. Void through slab with cast in balcony outlet above.
 - g 377mm Dia. Void through slab
 - h 300x300mm Void through slab
 - i 100mm Dia. Void through slab
- Builderswork openings for drainage pipework to be formed using Hilti fire collars except on roofs. Gullies to be cast-in. Refer to Architect and MEP consultant drawings for location and specification.

Overall opening sizes, including any provision of manifolds for offsets, must not exceed the overall size indicated on the Structural Drawings

CD

Notes:

- Drawings to be read in conjunction with all relevant architects and engineers drawings and specifications.
- For structural notes refer to drawings: H8656-ARP-ZZ-ZR-SE-00001.
- All dimensions are in mm unless noted otherwise.
- Do not scale this drawing.
- RC columns and walls to be grade C50/60 UNO.
- RC pile caps to be grade C40/50 U.N.O.
- RC slabs to be grade C32/40 U.N.O.
- RC retaining walls to be grade C32/40 U.N.O.
- Layout based on Architectural layouts and models as at 16/05/2025

C04	04/07/2025	Construction Issue
C03	29/05/2025	Construction Issue
C02	28/01/2025	Construction Issue
C01	10/12/2024	Construction Issue
P01	29/11/2024	Construction Issue
Issue	Date	Construction Issue

ARUP

1 West Regent Street
Glasgow G2 1RW
Tel +44(0)141 332 8534
www.arup.com

Client

Barratt East London

Project Title

Crown Wharf Canning Town
Block A4

Drawing Title

Block A4
General Arrangement
Levels 03

Scale at A1

As indicated

Dsg/Drw/Chkd/Appd

KM/AE/SB/GH

Role

Structural

Status

S5 - Suitable for Stage Approval

Arup Job No

288226-00

Rev

C04

ID

H8656-ARU-A4-03-DR-SE-20413

Concrete Column Schedule	
ID Type Mark	Type
CC2	375 x 375 RC Column
CC4	750 x 450 RC Column
CC5	900 x 450 RC Column
CC6	1050 x 450 RC Column
CC7	1050 x 500 RC Column
CC8	1100 x 500 RC Column
CC9	1100 x 550 RC Column
CC10	1100 x 600 RC Column
CC11	1200 x 300 RC Column
CC12	1200 x 350 RC Column
CC13	1200 x 450 RC Column
CC14	1200 x 500 RC Column
CC15	1350 x 250 RC Column
CC16	1350 x 450 RC Column
CC17	1400 x 400 RC Column
CC18	1400 x 450 RC Column
CC19	1600 x 350 RC Column
CC20	1750 x 300 RC Column
CC21	1750 x 350 RC Column
CC22	400 x 350 RC Column
CC23	450 x 250 RC Column
CC24	500 x 250 RC Column
CC25	500 x 350 RC Column
CC26	800 x 250 RC Column
CC27	1000 x 250 RC Column
CC28	As Dimensioned - Refer to Detail
CC29	650 x 350 RC Column
CC30	425 x 425 RC Column
CC31	1090 x 490 RC Column
CC32	1090 x 540 RC Column
CC33	1140 x 640 RC Column
CC34	1150 x 650 RC Column
CC35	1250 x 500 RC Column
CC36	1240 x 540 RC Column
CC37	1250 x 550 RC Column
CC38	1400 x 500 RC Column
CC39	1450 x 500 RC Column
CC40	1800 x 400 RC Column
CC41	1050 x 300 RC Column

Concrete Beam Schedule	
ID Type Mark	Type
CB1	240 x 640dp RC Beam
CB2	400 x 650dp RC Beam
CB3	400 x 890dp RC Beam
CB4	475 x 750dp RC Beam

Note - CB2 to be C50/60 concrete (including slab zone at top of beam) and to be formed as part of RC walls

Wall Schedule	
ID Type Mark	Wall Type
W1	250mm thick wall
W2	300mm thick wall
W3	400mm thick wall

Upstand Schedule	
ID Type Mark	Wall Type
UP1	140mm thick upstand
UP2	150mm thick upstand
UP4	200mm thick upstand
UP5	215mm thick upstand
UP6	250mm thick upstand
UP7	400mm thick upstand
UP8	100mm thick upstand
UP9	175mm thick upstand
UP10	330mm thick upstand
UP11	163mm thick upstand
UP12	300mm thick upstand
UP13	185mm thick upstand

Loading Key:

- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
- Balconies > SDL = 1.0kPa, IL = 2.5kPa
- Roof > SDL = 3.0kPa, IL = 1.5kPa
- Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
- Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
- Podium >SDL = 14.5kPa, IL = 5.0kPa
- Gym > SDL = 1.5kPa, IL = 5.0kPa
- Office > SDL = 1.5kPa, IL = 3.0kPa
- Lounge >SDL 1.5kPa, IL = 3.0kPa
- Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
- Storage > SDL = 1.5kPa, IL = 7.5kPa
- Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
- ASHP Roof Load > SDL = 3.0kPa, IL = 4 kPa

Notes :


- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
- internal blockwork walls as per Arch. drawings

Level 04-07 Main Slab Levels	
Level	Elevation at Top Survey
04	20.025 m
05	23.025 m
06	26.025 m
07	29.025 m

For Level 05-07 Layouts, refer to Level 04 General Arrangement. The relationship between all levels shown and main slab level are consistent at all levels referred to above.

Notes:

- Drawings to be read in conjunction with all relevant architects and engineers drawings and specifications.
- For structural notes refer to drawings: H8656-ARP-ZZ-ZZ-DR-SE-00001.
- All dimensions are in mm unless noted otherwise.
- Do not scale this drawing.
- RC columns and walls to be grade C50/60 UNO.
- RC pile caps to be grade C40/50 U.N.O.
- RC slabs to be grade C32/40 U.N.O.
- RC retaining walls to be grade C32/40 U.N.O.
- Layout based on Architectural layouts and models as at 16/05/2025

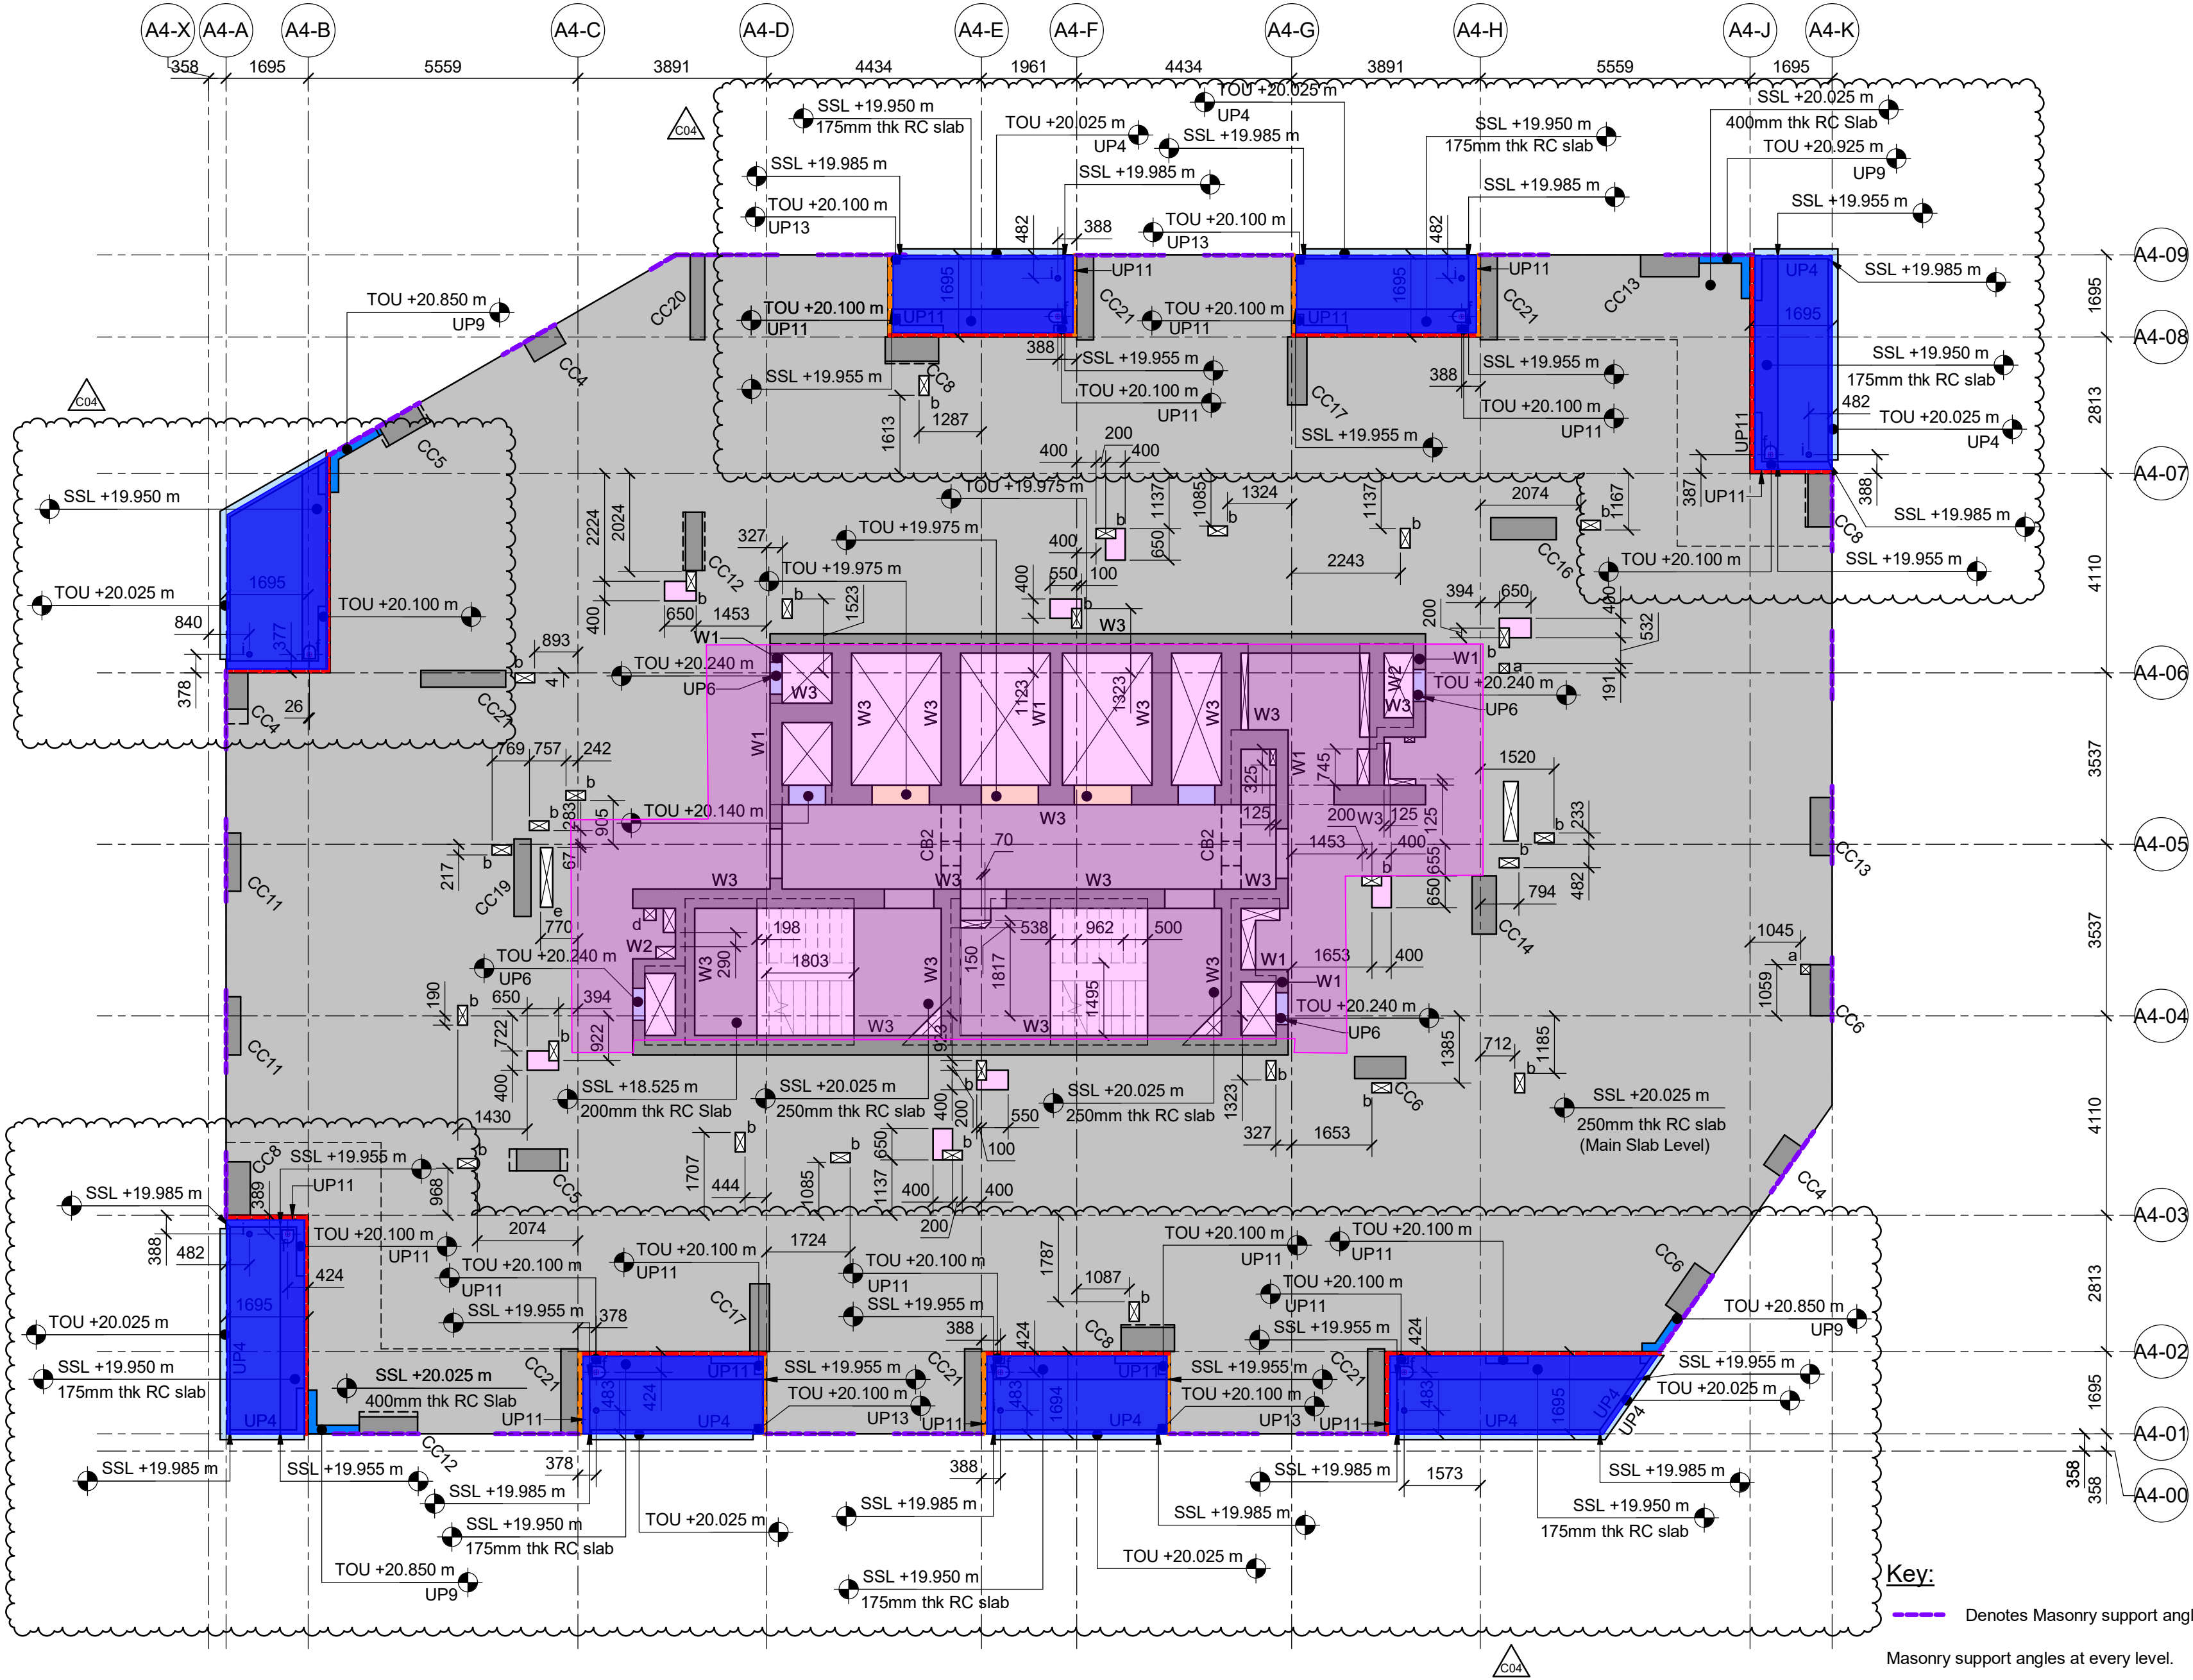

Builders Work Hole Key

Refer to level below for setting out if no dimensions at current level.

- a 200x200mm Void through slab
- b 200x400mm Void through slab
- c 200x600mm Void through slab
- d 250x250mm Void through slab
- e 1230x250mm Void through slab
- f 110mm Dia. Void through slab with cast in balcony outlet above.
- g 377mm Dia. Void through slab
- h 300x300mm Void through slab
- i 100mm Dia. Void through slab

Builderswork openings for drainage pipework to be formed using Hilti fire collars except on roofs. Gullies to be cast-in. Refer to Architect and MEP consultant drawings for location and specification.

Overall opening sizes, including any provision of manifolds for offsets, must not exceed the overall size indicated on the Structural Drawings

Key:

Denotes Masonry support angles

Masonry support angles at every level.

Masonry ancillary products including but not limited to masonry support angles, lintels, wall ties and reveal supports to Specialist design specification and setting out.

Adequate allowances to be made in Specialist designers load calculations for lintel behaviour increasing line loads on support angles accordingly.

Perimeter SFS to Cladding Contractor design. Brickwork to be tied back to Specialist designers specification. Appropriate consideration to be given to additional tying requirements around openings.

Denotes Structural thermal break cantilever between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.

Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.

Denotes 60mm Dia hole U.N.O for overflow pipe (Refer to Architect's drawings for level and setting out)

Denotes 100mm recess in slab for future shower tray installation. TOC = SSL - 100mm

Denotes Slab with sloping top surface. Soffit level flat. Refer to plans for level variation.

Denotes Lift Entrance Recesses

Denotes RC Upstand

Denotes RC Upstand at Levels 04, 07, 10, 13, 16, 19, 22, 25 & 28 - Refer to drawing H8656-ARU-A4-04-DR-SE-20414 for setting out

Denotes Column partially concealed in wall. Refer to reinforcement drawings for detailing.

Denotes Manhole. Refer to underground drainage drawings for manhole setting out.

CO4	04/07/2025	Construction Issue
CO3	29/05/2025	Construction Issue
CO2	28/01/2025	Construction Issue
CO1	10/12/2024	Construction Issue
PO3	29/11/2024	Construction Issue
PO2	10/05/2024	Preliminary Issue
PO1	06/12/2023	Suitable For Information
Issue	Date	Suitable For Information

ARUP

1 West Regent Street
Glasgow G2 1RW
Tel +44(0)141 332 8534
www.arup.com

Client

Barratt East London

Project Title

Crown Wharf Canning Town
Block A4

Drawing Title

Block A4
General Arrangement
Level 04 - 07

Scale at A1 As indicated

Dsg/Drw/Chkd/Appd
KM/AE/SB/GH

Role Structural

Status S5 - Suitable for Stage Approval

Arup Job No

288226-00

Rev

C04

ID
H8656-ARU-A4-04-DR-SE-20414

-  Denotes Structural thermal break cantilever between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
-  Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
-  Denotes 60mm Dia hole U.N.O for overflow pipe (Refer to Architect's drawings for level and setting out)

- | | | |
|-------------|----------------------------------|----------------------------------|
| Scale at A1 | As indicated | Dsg/Drw/Chkd/Appd
KM/AE/SB/GH |
| Role | Structural | |
| Status | S5 - Suitable for Stage Approval | |
| Arup Job No | 288226-00 | Rev
C04 |
| ID | H8656-ARU-A4-08-DR-SE-20418 | |

A1

A

B

C

D

E

F

G

H

I

J

K

L

M

N

1

2

3

4

5

6

7

8

9

10

Concrete Column Schedule	
ID Type Mark	Type
CC2	375 x 375 RC Column
CC4	750 x 450 RC Column
CC5	900 x 450 RC Column
CC6	1050 x 450 RC Column
CC7	1050 x 500 RC Column
CC8	1100 x 500 RC Column
CC9	1100 x 550 RC Column
CC10	1100 x 600 RC Column
CC11	1200 x 300 RC Column
CC12	1200 x 350 RC Column
CC13	1200 x 450 RC Column
CC14	1200 x 500 RC Column
CC15	1350 x 250 RC Column
CC16	1350 x 450 RC Column
CC17	1400 x 400 RC Column
CC18	1400 x 450 RC Column
CC19	1600 x 350 RC Column
CC20	1750 x 300 RC Column
CC21	1750 x 350 RC Column
CC22	400 x 350 RC Column
CC23	450 x 250 RC Column
CC24	500 x 250 RC Column
CC25	500 x 350 RC Column
CC26	800 x 250 RC Column
CC27	1000 x 250 RC Column
CC28	As Dimensioned - Refer to Detail
CC29	650 x 350 RC Column
CC30	425 x 425 RC Column
CC31	1090 x 490 RC Column
CC32	1090 x 540 RC Column
CC33	1140 x 640 RC Column
CC34	1150 x 650 RC Column
CC35	1250 x 500 RC Column
CC36	1240 x 540 RC Column
CC37	1250 x 550 RC Column
CC38	1400 x 500 RC Column
CC39	1450 x 500 RC Column
CC40	1800 x 400 RC Column
CC41	1050 x 300 RC Column

Concrete Beam Schedule	
ID Type Mark	Type
CB1	240 x 640dp RC Beam
CB2	400 x 650dp RC Beam
CB3	400 x 890dp RC Beam
CB4	475 x 750dp RC Beam

Note - CB2 to be C50/60 concrete (including slab zone at top of beam) and to be formed as part of RC walls

Wall Schedule	
ID Type Mark	Wall Type
W1	250mm thick wall
W2	300mm thick wall
W3	400mm thick wall

Upstand Schedule	
ID Type Mark	Wall Type
UP1	140mm thick upstand
UP2	150mm thick upstand
UP4	200mm thick upstand
UP5	215mm thick upstand
UP6	250mm thick upstand
UP7	400mm thick upstand
UP8	100mm thick upstand
UP9	175mm thick upstand
UP10	330mm thick upstand
UP11	163mm thick upstand
UP12	300mm thick upstand
UP13	185mm thick upstand

Loading Key:

- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
- Balconies > SDL = 1.0kPa, IL = 2.5kPa
- Roof > SDL = 3.0kPa, IL = 1.5kPa
- Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
- Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
- Podium >SDL = 14.5kPa, IL = 5.0kPa
- Gym > SDL = 1.5kPa, IL = 5.0kPa
- Office > SDL = 1.5kPa, IL = 3.0kPa
- Lounge >SDL 1.5kPa, IL = 3.0kPa
- Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
- Storage > SDL = 1.5kPa, IL = 7.5kPa
- Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
- ASHP Roof Load > SDL = 3.0kPa, IL = 4 kPa

Notes :


- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
- internal blockwork walls as per Arch. drawings

Level 12-17 Floor Schedule	
Level	Elevation at Top Survey
12	44.025 m
13	47.025 m
14	50.025 m
15	53.025 m
16	56.025 m
17	59.025 m

For Level 13-17 Layouts, refer to Level 12 General Arrangement. The relationship between all levels shown and main slab level are consistent at all levels referred to above.

Notes:

- Drawings to be read in conjunction with all relevant architects and engineers drawings and specifications.
- For structural notes refer to drawings: H8656-ARP-ZZ-ZR-SE-00001.
- All dimensions are in mm unless noted otherwise.
- Do not scale this drawing.
- RC columns and walls to be grade C50/60 UNO.
- RC pile caps to be grade C40/50 U.N.O.
- RC slabs to be grade C32/40 U.N.O.
- RC retaining walls to be grade C32/40 U.N.O.
- Layout based on Architectural layouts and models as at 16/05/2025

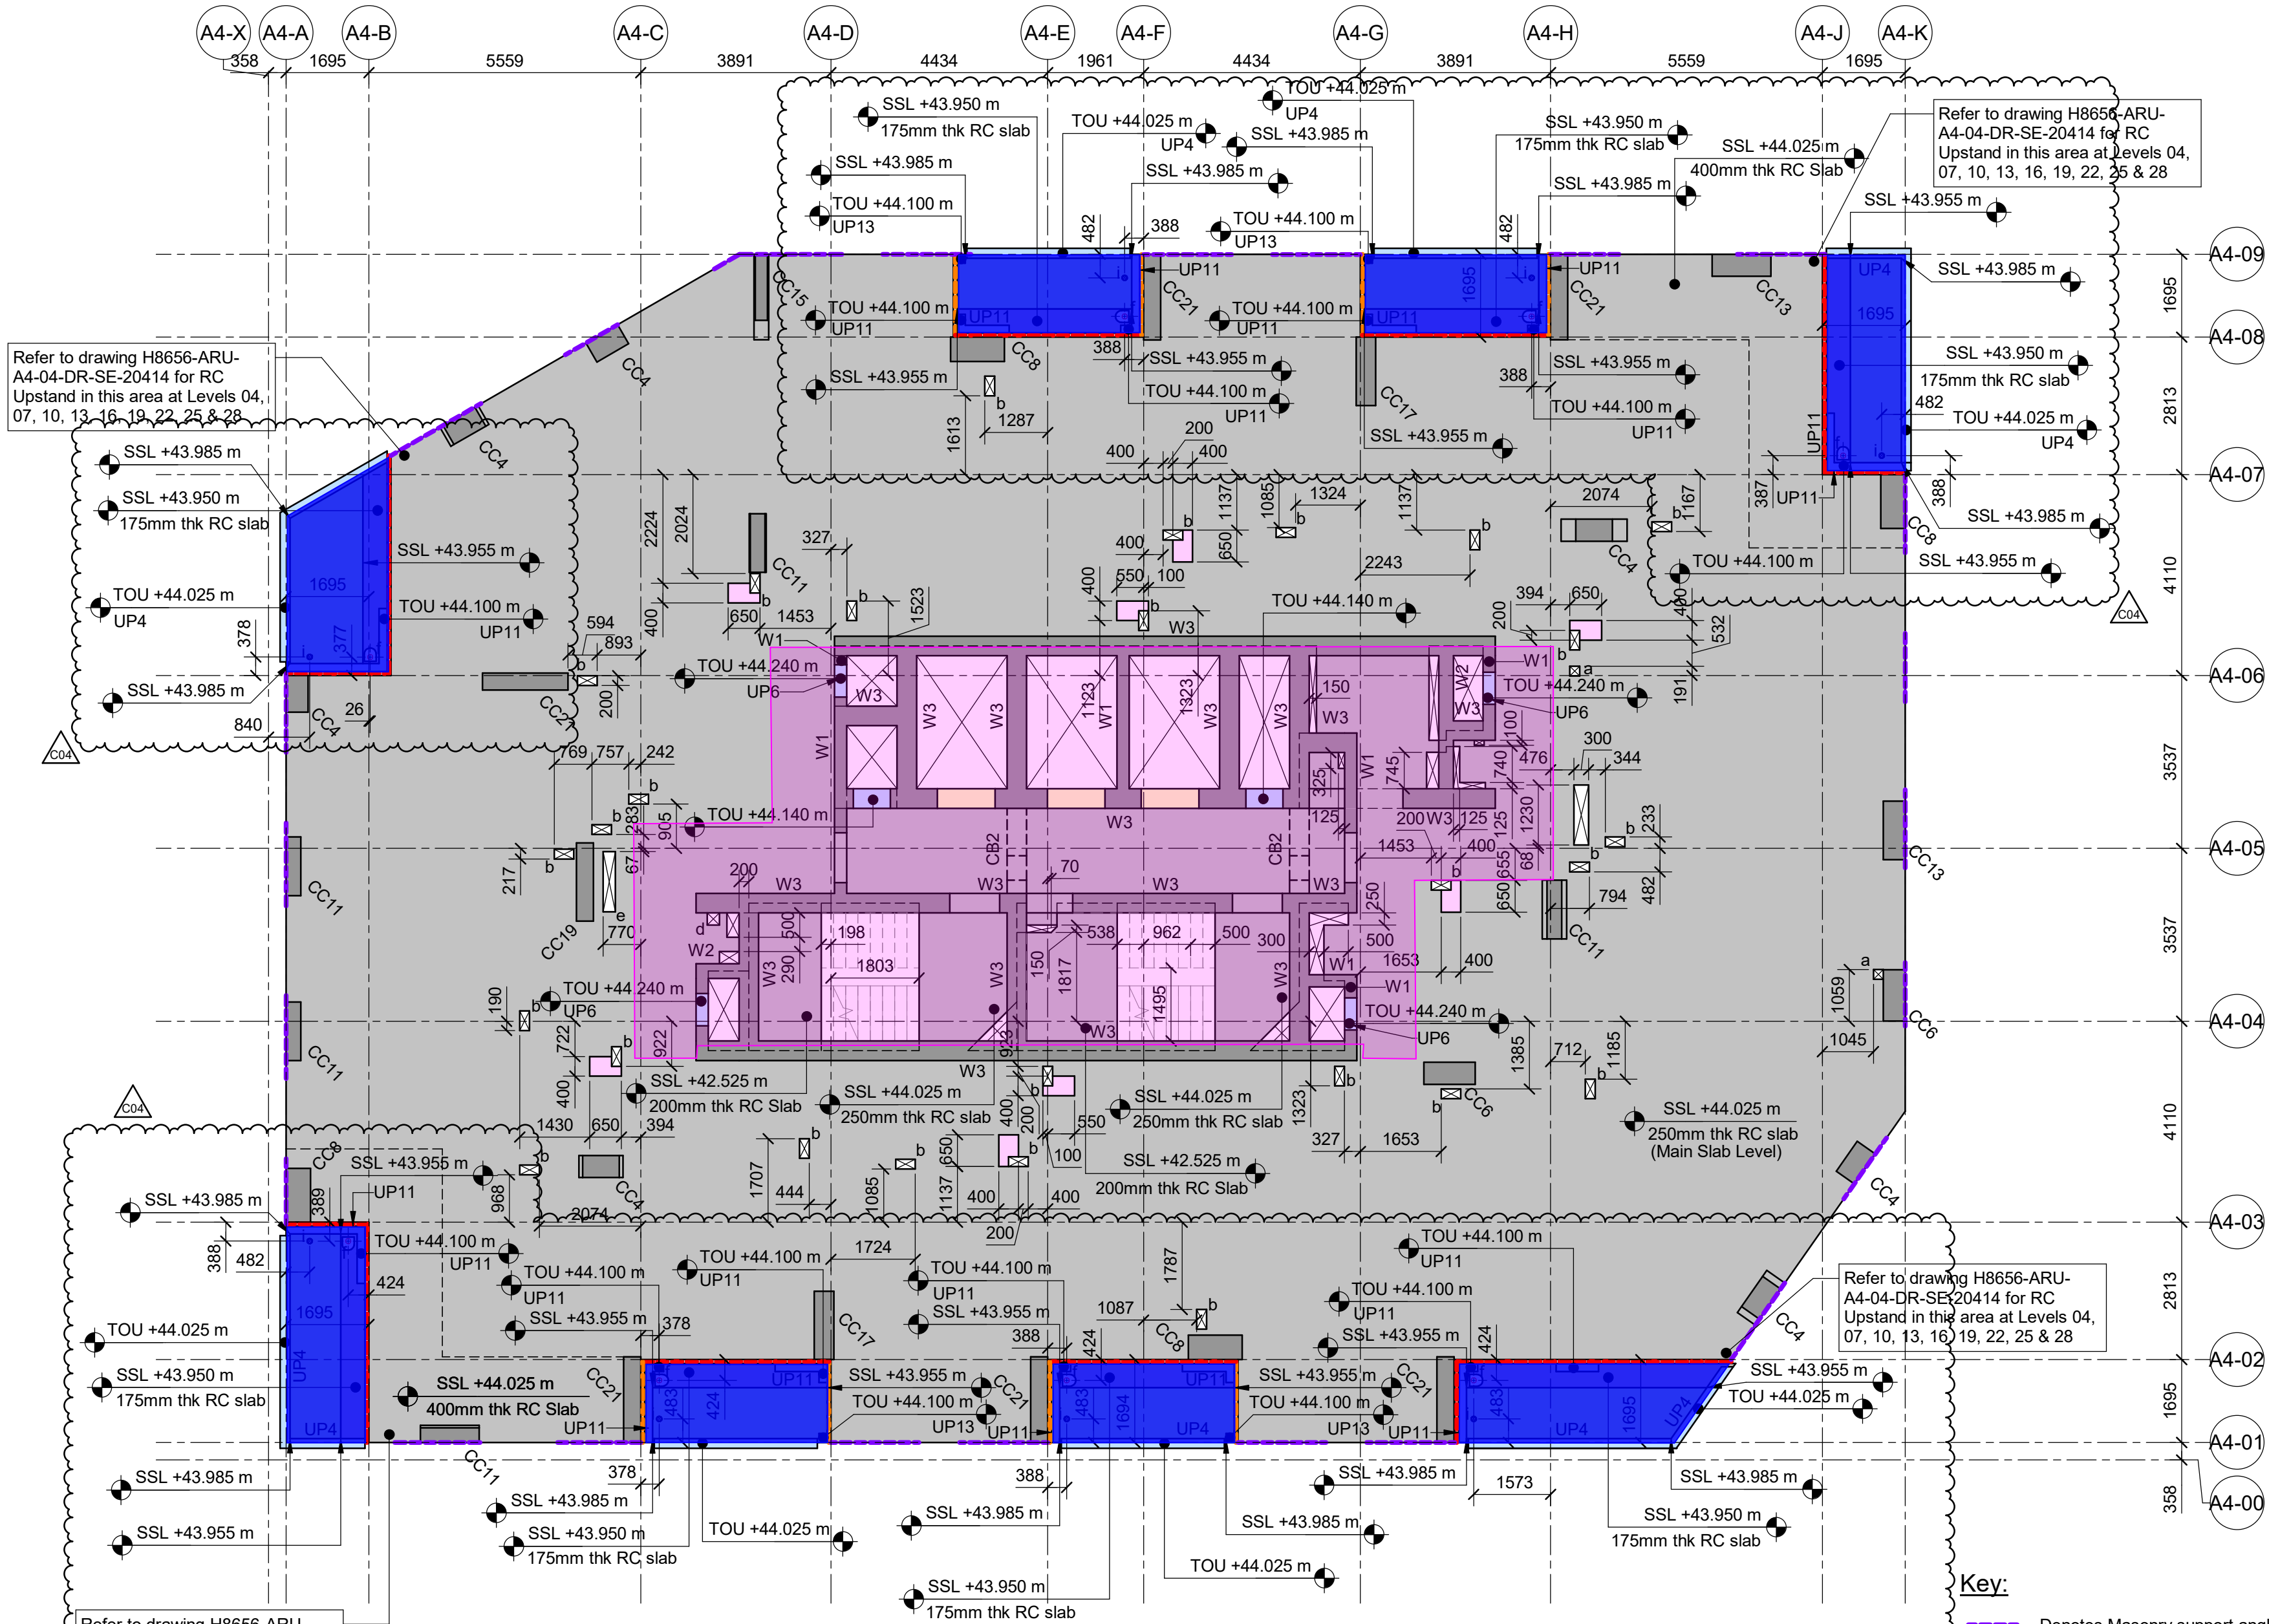

Level 12 - 17 Layout

Scale 1 : 100

Builders Work Hole Key

Refer to level below for setting out if no dimensions at current level.

- a 200x200mm Void through slab
- b 200x400mm Void through slab
- c 200x600mm Void through slab
- d 250x250mm Void through slab
- e 1230x250mm Void through slab
- f 110mm Dia. Void through slab with cast in balcony outlet above.
- g 377mm Dia. Void through slab
- h 300x300mm Void through slab
- i 100mm Dia. Void through slab

Builderswork openings for drainage pipework to be formed using Hilti fire collars except on roofs. Gullies to be cast-in. Refer to Architect and MEP consultant drawings for location and specification.

Overall opening sizes, including any provision of manifolds for offsets, must not exceed the overall size indicated on the Structural Drawings

Key:

Denotes Masonry support angles

Masonry support angles at every level.

Masonry ancillary products including but not limited to masonry support angles, lintels, wall ties and reveal supports to Specialist design specification and setting out.

Adequate allowances to be made in Specialist designers load calculations for lintel behaviour increasing line loads on support angles accordingly.

Perimeter SFS to Cladding Contractor design. Brickwork to be tied back to Specialist designers specification. Appropriate consideration to be given to additional tying requirements around openings.

Denotes Structural thermal break cantilever between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.

Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.

Denotes 60mm Dia hole U.N.O for overflow pipe (Refer to Architect's drawings for level and setting out)

Denotes 100mm recess in slab for future shower tray installation. TOC = SSL - 100mm

Denotes Slab with sloping top surface. Soffit level flat. Refer to plans for level variation.

Denotes Lift Entrance Recesses

Denotes RC Upstand

Denotes RC Upstand at Levels 04, 07, 10, 13, 16, 19, 22, 25 & 28 - Refer to drawing H8656-ARU-A4-04-DR-SE-20414 for setting out

Denotes Column partially concealed in wall. Refer to reinforcement drawings for detailing.

Denotes Manhole. Refer to underground drainage drawings for manhole setting out.

C04	07/07/2025	Construction Issue
C03	29/05/2025	Construction Issue
C02	28/01/2025	Construction Issue
C01	10/12/2024	Construction Issue
P03	29/11/2024	Construction Issue
P02	10/05/2024	Preliminary Issue
P01	06/12/2023	Suitable For Information
Issue	Date	Suitable For Information

ARUP

1 West Regent Street
Glasgow G2 1RW
Tel +44(0)141 332 8534
www.arup.com

Client

Barratt East London

Project Title

Crown Wharf Canning Town
Block A4

Drawing Title

Block A4
General Arrangement
Level 12 - 17

Scale at A1 As indicated

Dsg/Drw/Chkd/Appd
KM/AE/SB/GH

Role Structural

Status S5 - Suitable for Stage Approval

Arup Job No

288226-00

Rev

C04

ID

H8656-ARU-A4-12-DR-SE-20422


Concrete Column Schedule	
ID Type Mark	Type
CC2	375 x 375 RC Column
CC4	750 x 450 RC Column
CC5	900 x 450 RC Column
CC6	1050 x 450 RC Column
CC7	1050 x 500 RC Column
CC8	1100 x 500 RC Column
CC9	1100 x 550 RC Column
CC10	1100 x 600 RC Column
CC11	1200 x 300 RC Column
CC12	1200 x 350 RC Column
CC13	1200 x 450 RC Column
CC14	1200 x 500 RC Column
CC15	1350 x 250 RC Column
CC16	1350 x 450 RC Column
CC17	1400 x 400 RC Column
CC18	1400 x 450 RC Column
CC19	1600 x 350 RC Column
CC20	1750 x 300 RC Column
CC21	1750 x 350 RC Column
CC22	400 x 350 RC Column
CC23	450 x 250 RC Column
CC24	500 x 250 RC Column
CC25	500 x 350 RC Column
CC26	800 x 250 RC Column
CC27	1000 x 250 RC Column
CC28	As Dimensioned - Refer to Detail
CC29	650 x 350 RC Column
CC30	425 x 425 RC Column
CC31	1090 x 490 RC Column
CC32	1090 x 540 RC Column
CC33	1140 x 640 RC Column
CC34	1150 x 650 RC Column
CC35	1250 x 500 RC Column
CC36	1240 x 540 RC Column
CC37	1250 x 550 RC Column
CC38	1400 x 500 RC Column
CC39	1450 x 500 RC Column
CC40	1800 x 400 RC Column
CC41	1050 x 300 RC Column

Concrete Beam Schedule	
ID Type Mark	Type
CB1	240 x 640dp RC Beam
CB2	400 x 650dp RC Beam
CB3	400 x 890dp RC Beam
CB4	475 x 750dp RC Beam

Note - CB2 to be C50/60 concrete (including slab zone at top of beam) and to be formed as part of RC walls

Wall Schedule	
ID Type Mark	Wall Type
W1	250mm thick wall
W2	300mm thick wall
W3	400mm thick wall

Upstand Schedule	
ID Type Mark	Wall Type
UP1	140mm thick upstand
UP2	150mm thick upstand
UP4	200mm thick upstand
UP5	215mm thick upstand
UP6	250mm thick upstand
UP7	400mm thick upstand
UP8	100mm thick upstand
UP9	175mm thick upstand
UP10	330mm thick upstand
UP11	163mm thick upstand
UP12	300mm thick upstand



Column CC28
Scale 1 : 50

Concrete Column Schedule	
ID Type Mark	Type
CP1	450 x 450 RC Plinth

Loading Key:


- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
- Balconies > SDL = 1.0kPa, IL = 2.5kPa
- Roof > SDL = 3.0kPa, IL = 1.5kPa
- Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
- Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
- Podium >SDL = 14.5kPa, IL = 5.0kPa
- Gym > SDL = 1.5kPa, IL = 5.0kPa
- Office > SDL = 1.5kPa, IL = 3.0kPa
- Lounge >SDL 1.5kPa, IL = 3.0kPa
- Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
- Storage > SDL = 1.5kPa, IL = 7.5kPa
- Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
- ASHP Roof Load > SDL = 3.0kPa, IL = 4 kPa

Notes :

- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
- internal blockwork walls as per Arch. drawings

Level 31 Layout

Scale 1 : 100

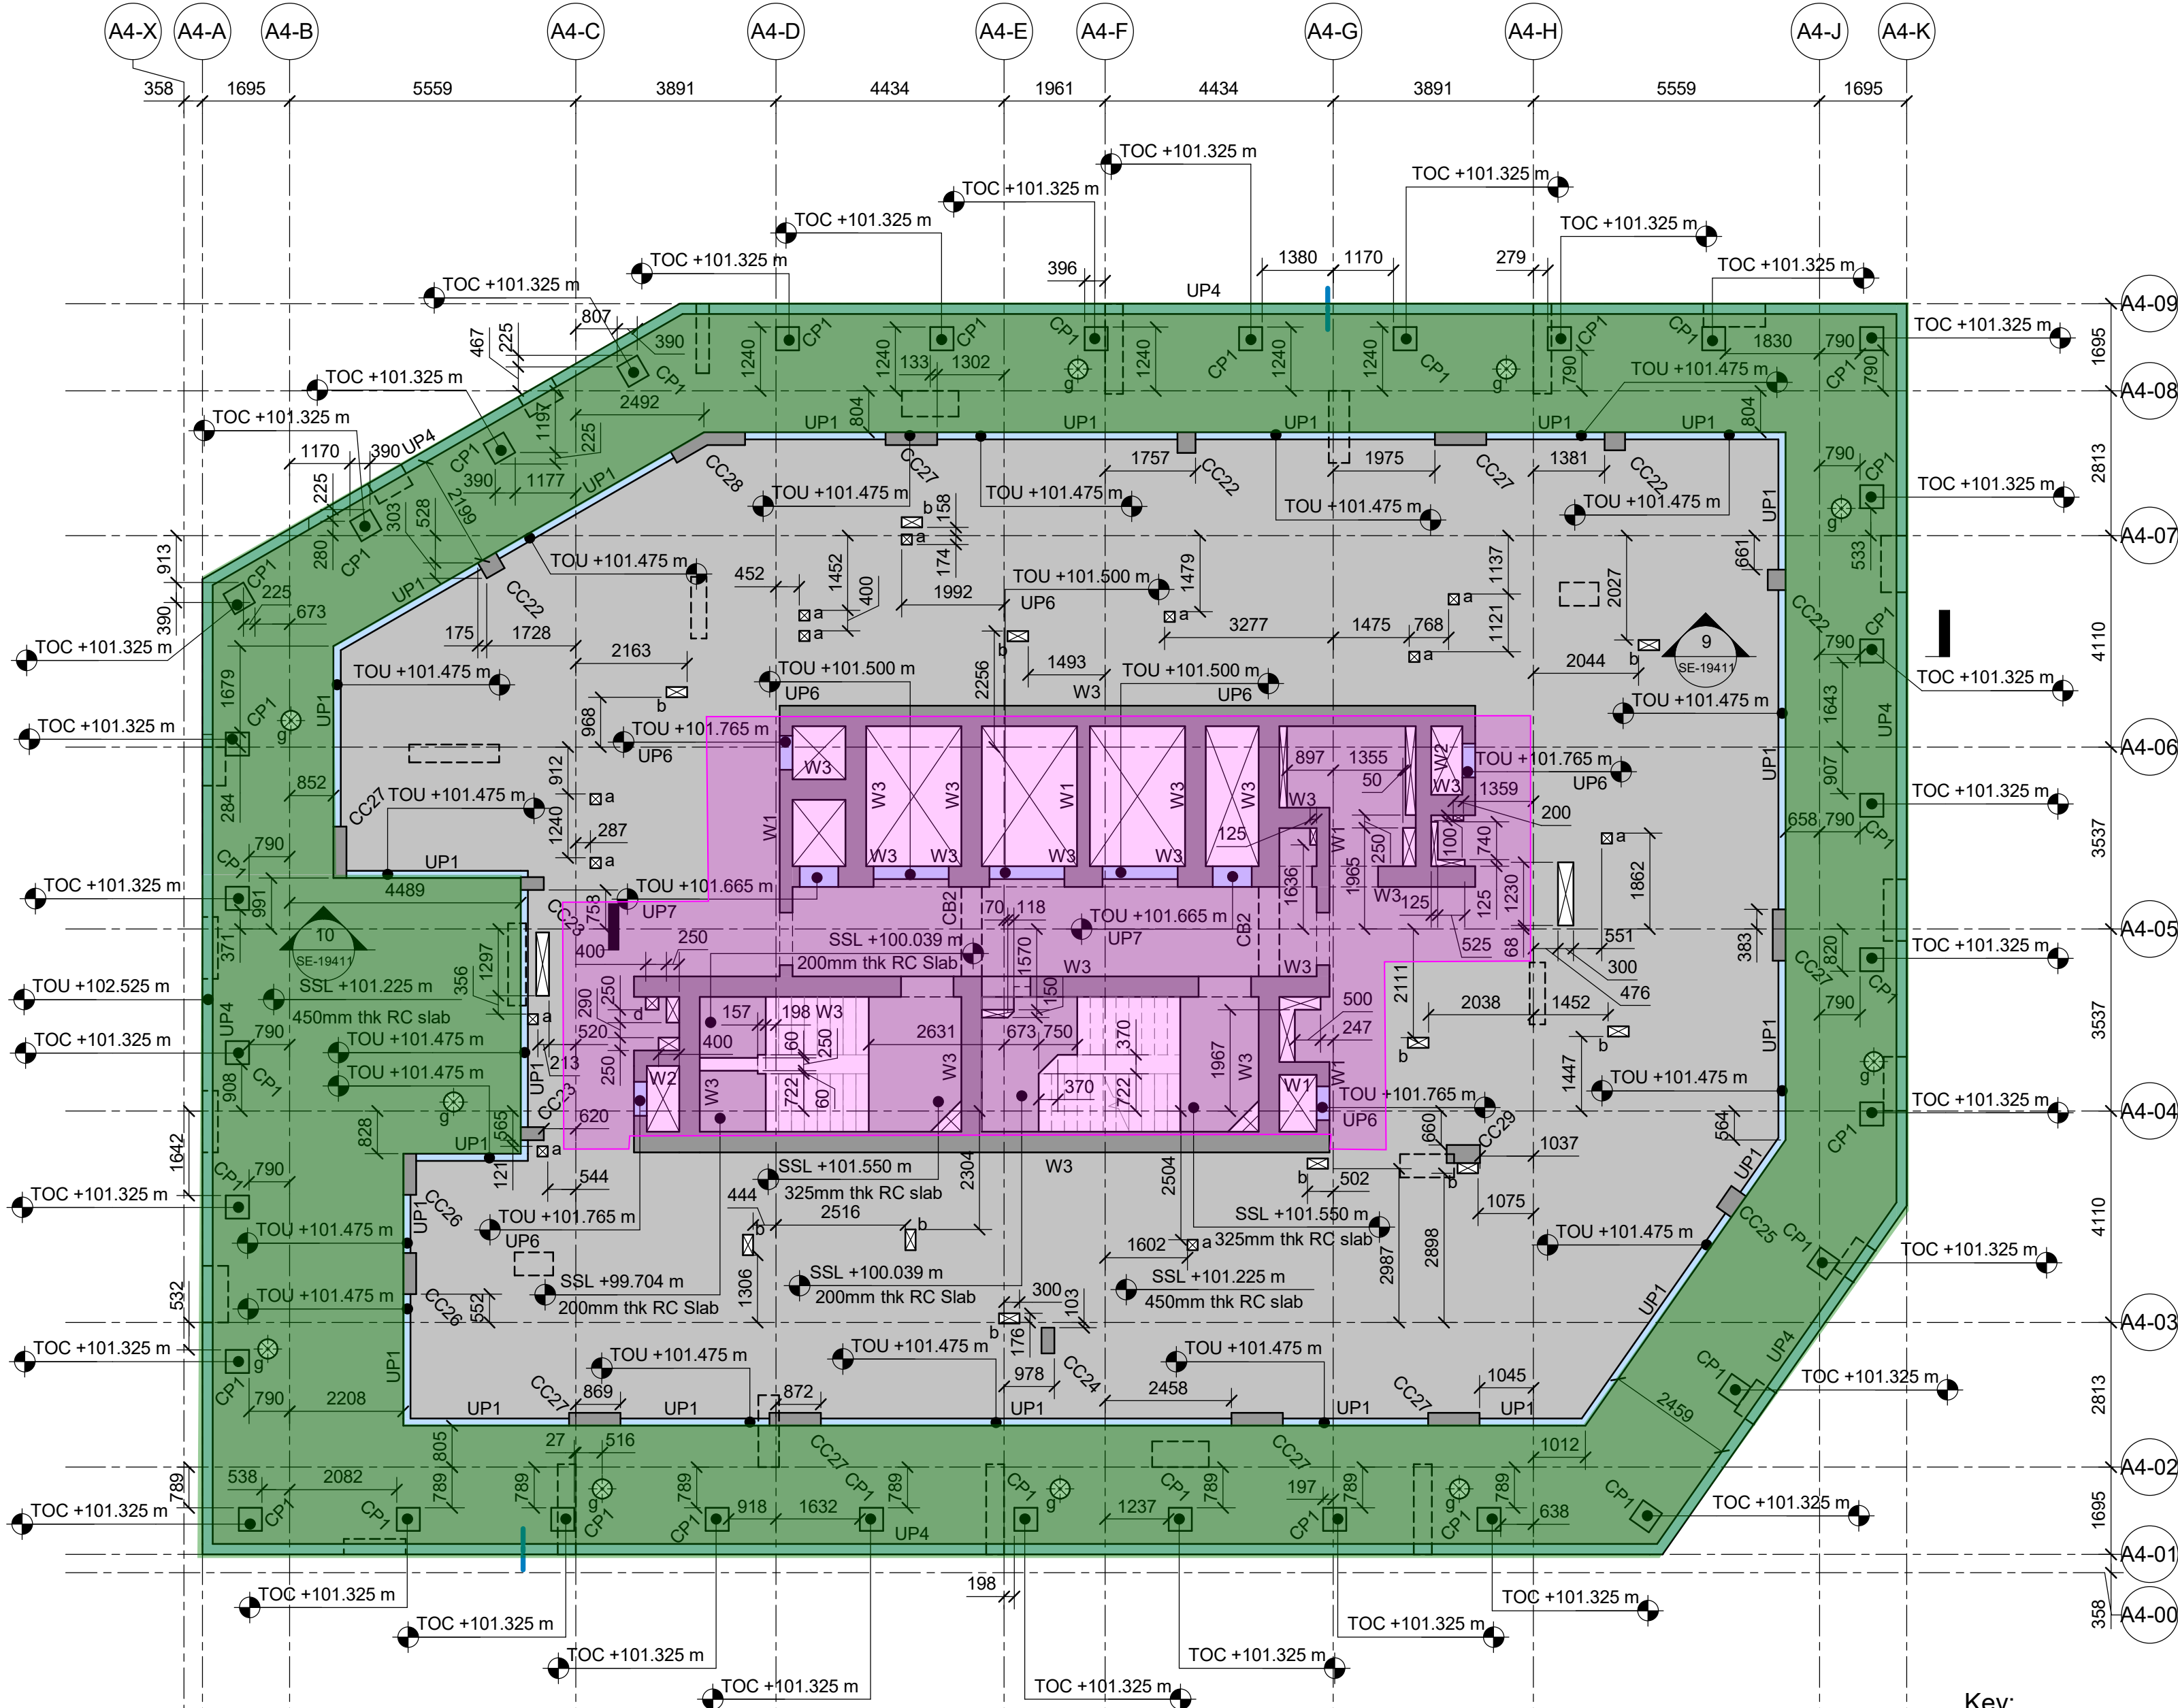

Loading Key:

- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
- Balconies > SDL = 1.0kPa, IL = 2.5kPa
- Roof > SDL = 3.0kPa, IL = 1.5kPa
- Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
- Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
- Podium >SDL = 14.5kPa, IL = 5.0kPa
- Gym > SDL = 1.5kPa, IL = 5.0kPa
- Office > SDL = 1.5kPa, IL = 3.0kPa
- Lounge >SDL 1.5kPa, IL = 3.0kPa
- Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
- Storage > SDL = 1.5kPa, IL = 7.5kPa
- Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
- ASHP Roof Load > SDL = 3.0kPa, IL = 4 kPa

Notes :

- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
- internal blockwork walls as per Arch. drawings

Builders Work Hole Key

Refer to level below for setting out if no dimensions at current level.

- a 200x200mm Void through slab
- b 200x400mm Void through slab
- c 200x600mm Void through slab
- d 250x250mm Void through slab
- e 1230x250mm Void through slab
- f 110mm Dia. Void through slab with cast in balcony outlet above.
- g 377mm Dia. Void through slab
- h 300x300mm Void through slab

Builderswork openings for drainage pipework to be formed using Hilti fire collars except on roofs. Gullies to be cast-in. Refer to Architect and MEP consultant drawings for location and specification.

Overall opening sizes, including any provision of manifolds for offsets, must not exceed the overall size indicated on the Structural Drawings

Key:

- Denotes Masonry support angles

Masonry support angles at every level.

Masonry ancillary products including but not limited to masonry support angles, lintels, wall ties and reveal supports to Specialist design specification and setting out.

Adequate allowances to be made in Specialist designers load calculations for lintel behaviour increasing line loads on support angles accordingly.

Perimeter SFS to Cladding Contractor design. Brickwork to be tied back to Specialist designers specification. Appropriate consideration to be given to additional tying requirements around openings.

- Denotes Structural thermal break cantilever between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
- Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
- Denotes 60mm Dia hole U.N.O for overflow pipe (Refer to Architect's drawings for level and setting out)

- Denotes 100mm recess in slab for future shower tray installation. TOC = SSL - 100mm
- Denotes Slab with sloping top surface. Soffit level flat. Refer to plans for level variation.
- Denotes Lift Entrance Recesses
- Denotes RC Upstand
- Denotes RC Upstand at Levels 04, 07, 10, 13, 16, 19, 22, 25 & 28 - Refer to drawing H8656-ARU-A4-04-DR-SE-20414 for setting out
- Denotes Column partially concealed in wall. Refer to reinforcement drawings for detailing.
- Denotes Manhole. Refer to underground drainage drawings for manhole setting out.

Notes:

- Drawings to be read in conjunction with all relevant architects and engineers drawings and specifications.
- For structural notes refer to drawings: H8656-ARP-ZZ-ZZ-DR-SE-00001.
- All dimensions are in mm unless noted otherwise.
- Do not scale this drawing.
- RC columns and walls to be grade C50/60 U.N.O.
- RC pile caps to be grade C40/50 U.N.O.
- RC slabs to be grade C32/40 U.N.O.
- RC retaining walls to be grade C32/40 U.N.O.
- Layout based on Architectural layouts and models as at 16/05/2025

CO1	29/05/2025	Construction Issue
Issue	Date	

ARUP

1 West Regent Street
Glasgow G2 1RW
Tel +44(0)141 332 8534
www.arup.com

Client
Barratt East London

Project Title
**Crown Wharf Canning Town
Block A4**

Drawing Title
**Block A4
General Arrangement
Levels 31**

Scale at A1	As indicated	Dsg/Drw/Chkd/Appd KM/LH/SB/GH
Role	Structural	
Status	S5 - Suitable for Stage Approval	
Arup Job No	288226-00	Rev C01
ID	H8656-ARU-A4-31-DR-SE-20441	

A1

A

B

C

D

E

F

G

H

I

J

K

L

M

N

1

2

3

4

5

6

7

8

9

10

Concrete Column Schedule	
ID Type Mark	Type
CC2	375 x 375 RC Column
CC4	750 x 450 RC Column
CC5	900 x 450 RC Column
CC6	1050 x 450 RC Column
CC7	1050 x 500 RC Column
CC8	1100 x 500 RC Column
CC9	1100 x 550 RC Column
CC10	1100 x 600 RC Column
CC11	1200 x 300 RC Column
CC12	1200 x 350 RC Column
CC13	1200 x 450 RC Column
CC14	1200 x 500 RC Column
CC15	1350 x 250 RC Column
CC16	1350 x 450 RC Column
CC17	1400 x 400 RC Column
CC18	1400 x 450 RC Column
CC19	1600 x 350 RC Column
CC20	1750 x 300 RC Column
CC21	1750 x 350 RC Column
CC22	400 x 350 RC Column
CC23	450 x 250 RC Column
CC24	500 x 250 RC Column
CC25	500 x 350 RC Column
CC26	800 x 250 RC Column
CC27	1000 x 250 RC Column
CC28	As Dimensioned - Refer to Detail
CC29	650 x 350 RC Column
CC30	425 x 425 RC Column
CC31	1090 x 490 RC Column
CC32	1090 x 540 RC Column
CC33	1140 x 640 RC Column
CC34	1150 x 650 RC Column
CC35	1250 x 500 RC Column
CC36	1240 x 540 RC Column
CC37	1250 x 550 RC Column
CC38	1400 x 500 RC Column
CC39	1450 x 500 RC Column
CC40	1800 x 400 RC Column
CC41	1050 x 300 RC Column

Concrete Beam Schedule	
ID Type Mark	Type
CB1	240 x 640dp RC Beam
CB2	400 x 650dp RC Beam
CB3	400 x 890dp RC Beam
CB4	475 x 750dp RC Beam

Note - CB2 to be C50/60 concrete (including slab zone at top of beam) and to be formed as part of RC walls

Wall Schedule	
ID Type Mark	Wall Type
W1	250mm thick wall
W2	300mm thick wall
W3	400mm thick wall


Upstand Schedule	
ID Type Mark	Wall Type
UP1	140mm thick upstand
UP2	150mm thick upstand
UP4	200mm thick upstand
UP5	215mm thick upstand
UP6	250mm thick upstand
UP7	400mm thick upstand
UP8	100mm thick upstand
UP9	175mm thick upstand
UP10	330mm thick upstand
UP11	163mm thick upstand
UP12	300mm thick upstand

Loading Key:

- Residential (U.N.O.) > SDL = 1.5kPa, IL 1.5kPa + 1.0kPa (partitions)
- Balconies > SDL = 1.0kPa, IL = 2.5kPa
- Roof > SDL = 3.0kPa, IL = 1.5kPa
- Plant rooms > SDL = 1.5kPa, IL = 7.5kPa
- Stairs and corridors > SDL 1.5kPa, IL = 4.0kPa
- Podium >SDL = 14.5kPa, IL = 5.0kPa
- Gym > SDL = 1.5kPa, IL = 5.0kPa
- Office > SDL = 1.5kPa, IL = 3.0kPa
- Lounge >SDL 1.5kPa, IL = 3.0kPa
- Car Parking & Cycle Store > SDL = 1.5kPa, IL = 5.0kPa
- Storage > SDL = 1.5kPa, IL = 7.5kPa
- Plant rooms with Sprinkler tanks > SDL = 1.5 kPa, IL = 35.5 kPa
- ASHP Roof Load > SDL = 3.0kPa, IL = 4 kPa


Notes :

- SFS + 100mm brickwork for facade [refer to Arch. drawings for extent]
- internal blockwork walls as per Arch. drawings

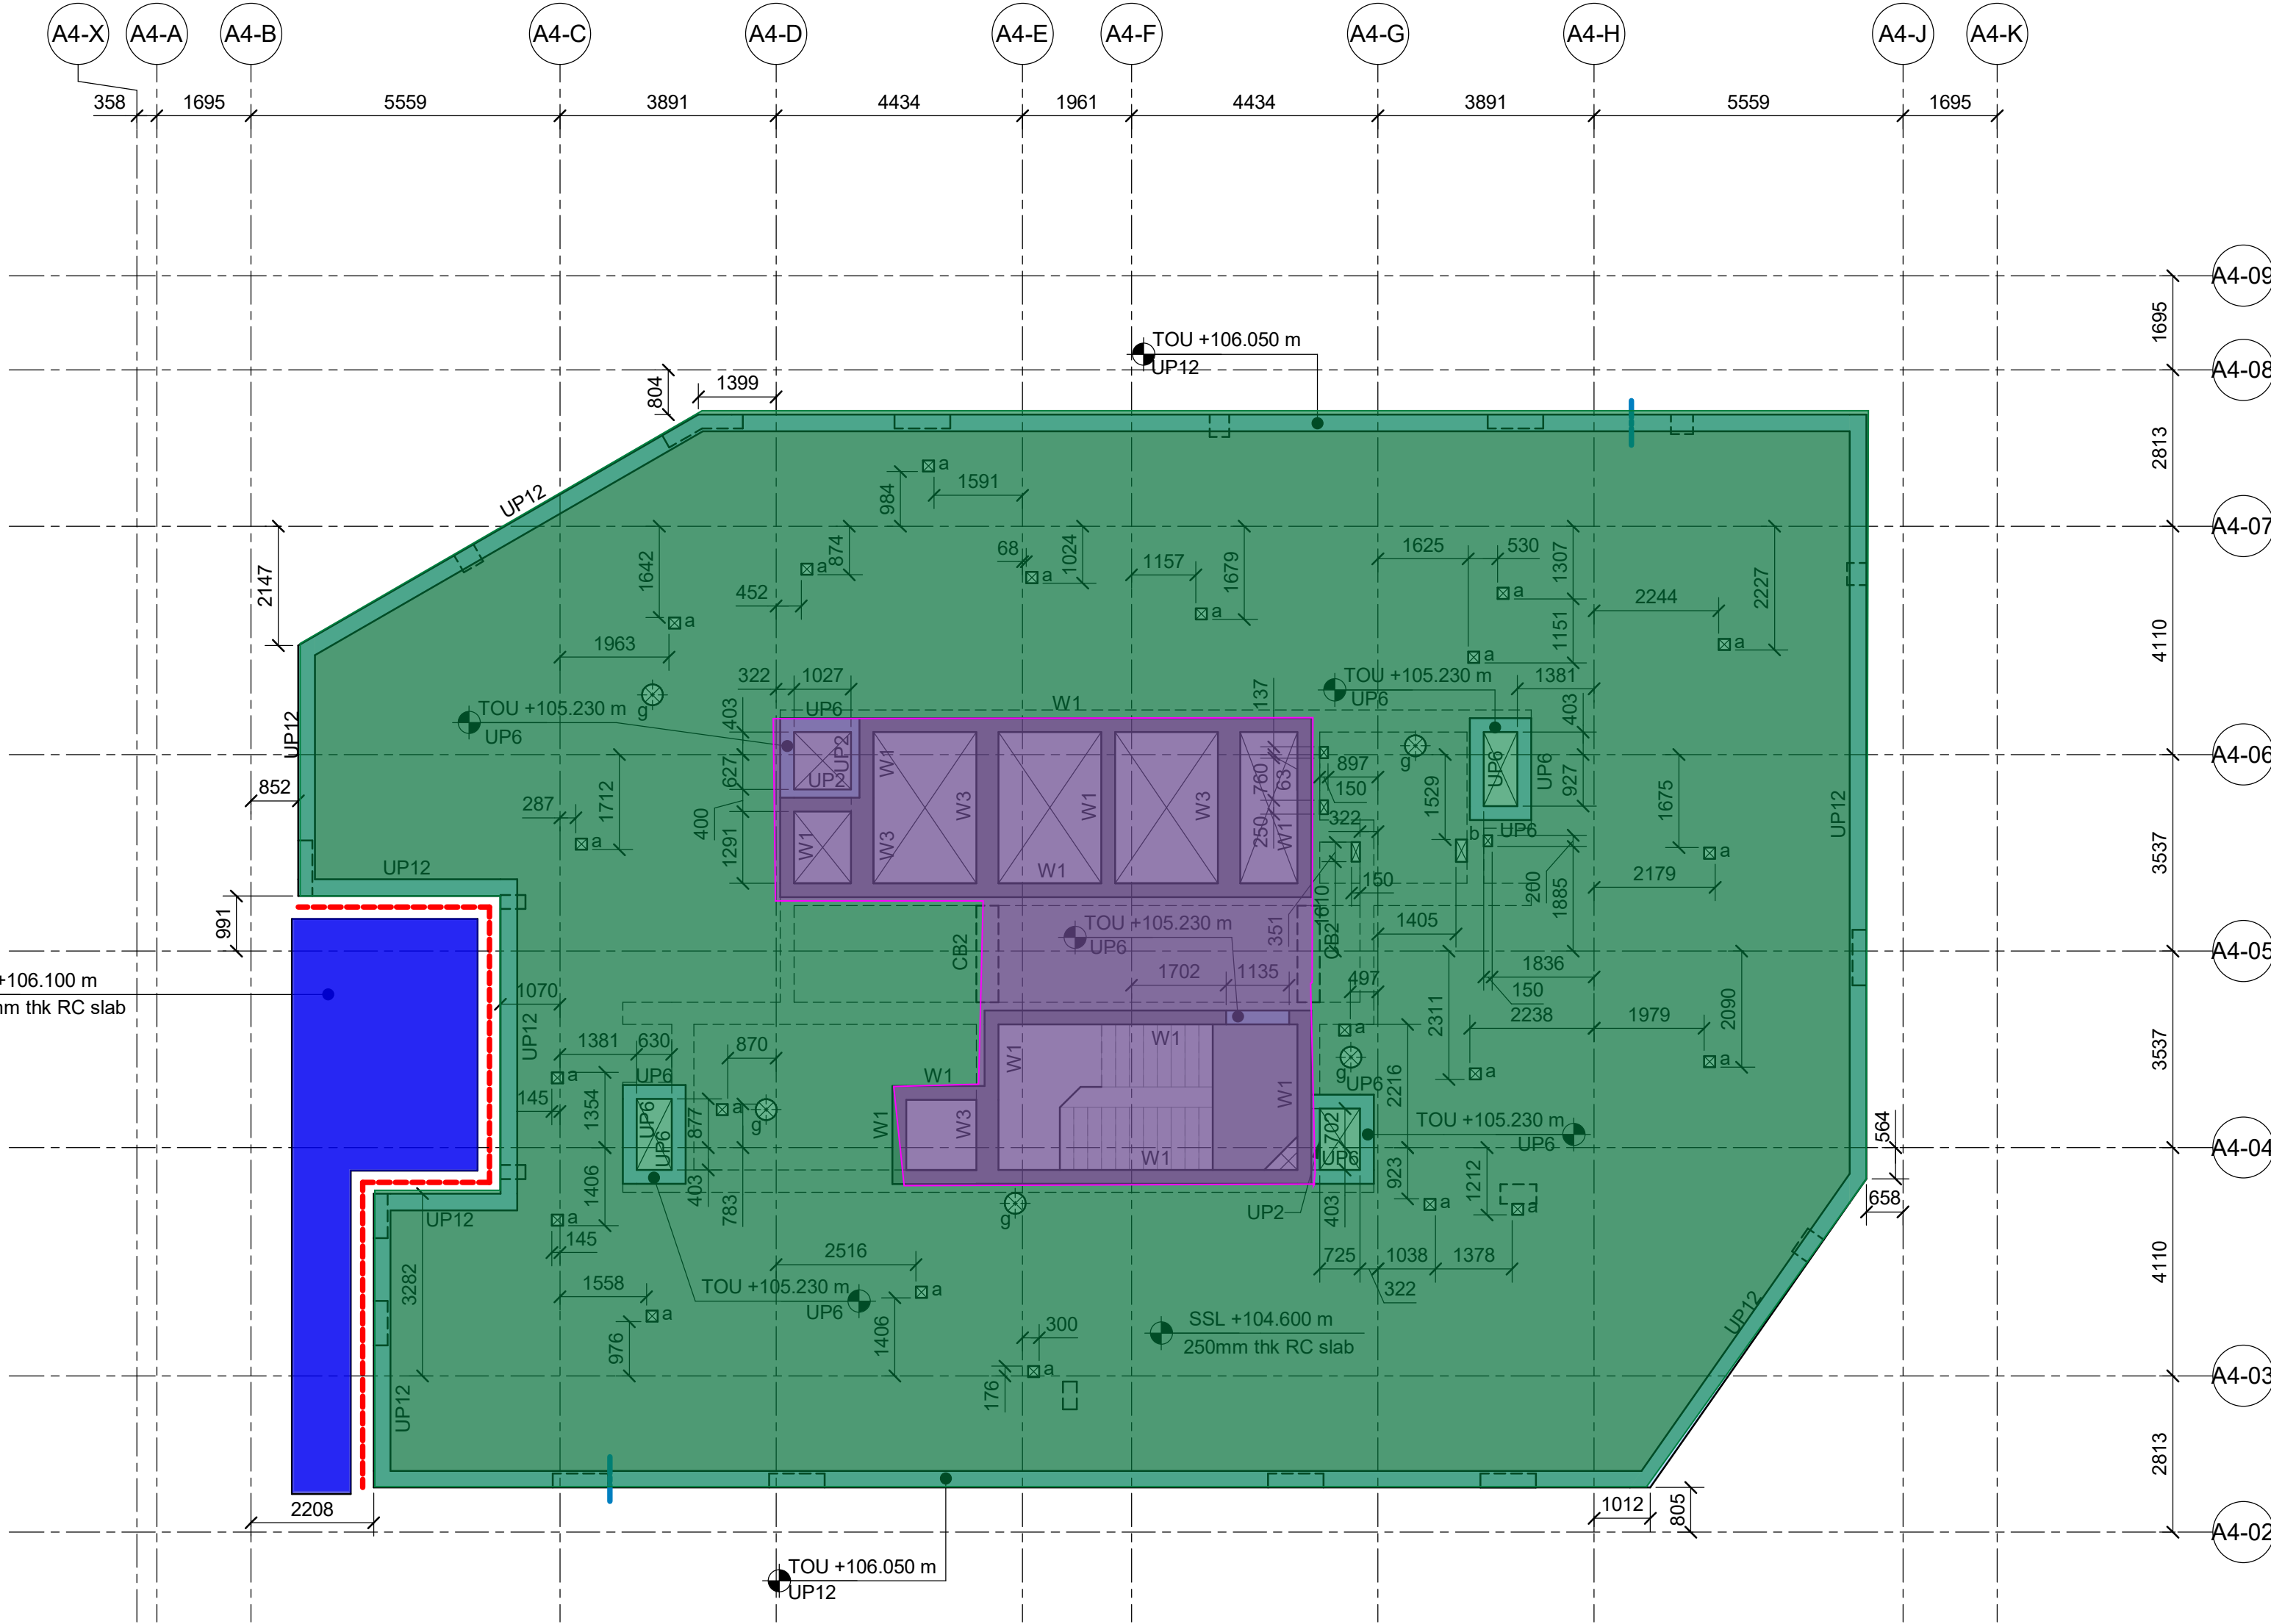

Roof Layout

Scale 1 : 100

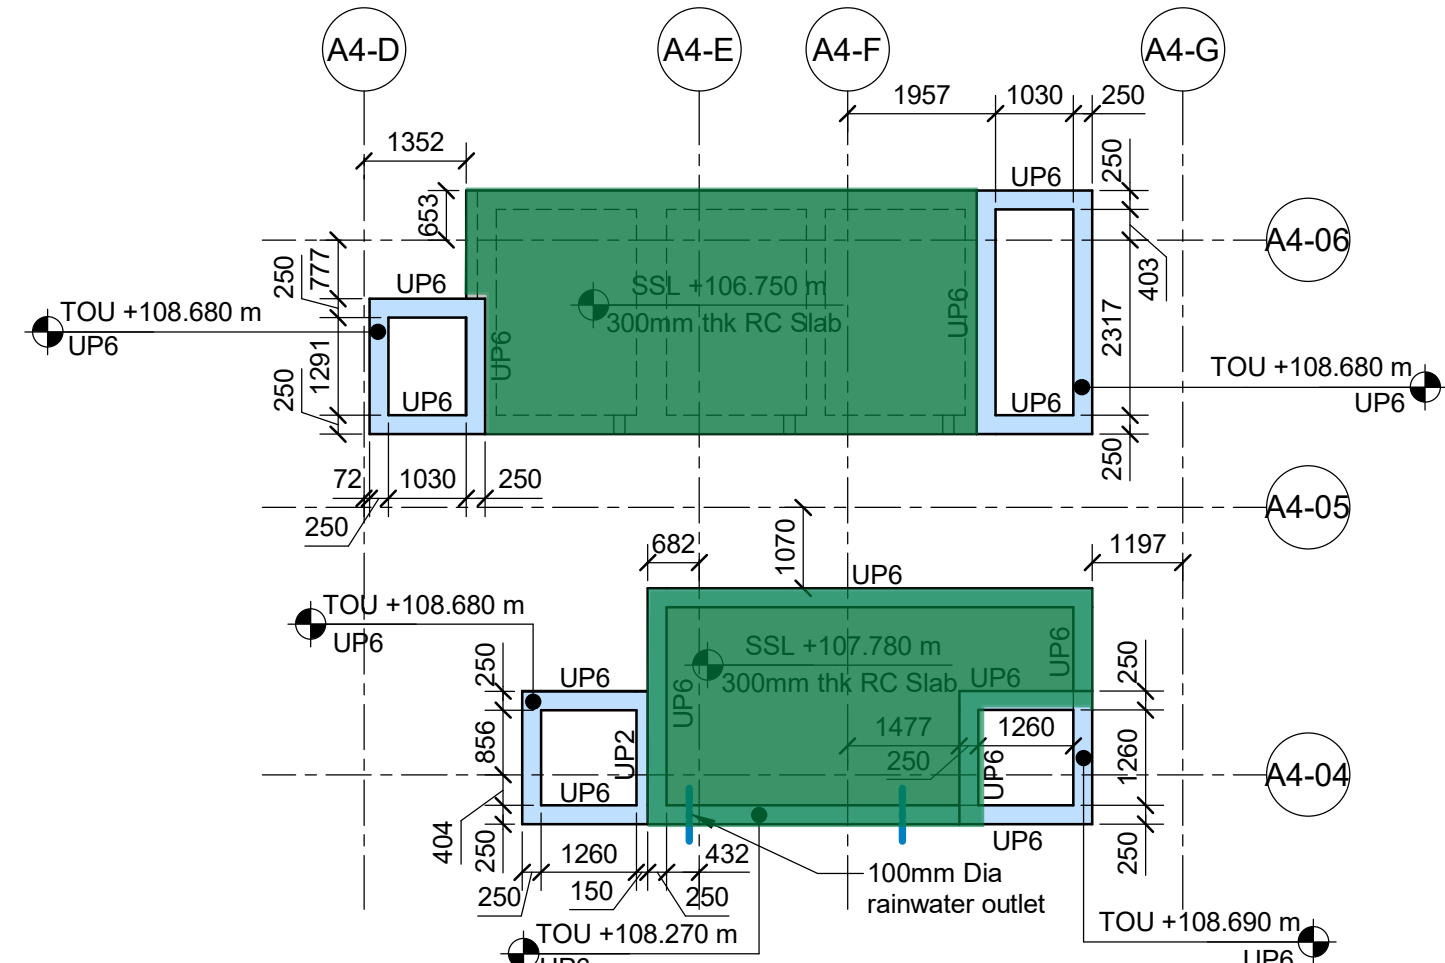

Roof Parapet Level

Scale 1 : 100

Key:

- Denotes Masonry support angles

Masonry support angles at every level.

Masonry ancillary products including but not limited to masonry support angles, lintels, wall ties and reveal supports to Specialist design specification and setting out.

Adequate allowances to be made in Specialist designers load calculations for lintel behaviour increasing line loads on support angles accordingly.

Perimeter SFS to Cladding Contractor design. Brickwork to be tied back to Specialist designers specification. Appropriate consideration to be given to additional tying requirements around openings.

- Denotes Structural thermal break cantilever between balcony slab and internal RC slab.

- Denotes Structural thermal break simply supported between balcony slab and internal RC slab. Thermal breaks to specialist balcony designers specification.
- Denotes 60mm Dia hole U.N.O for overflow pipe (Refer to Architect's drawings for level and setting out)

Builders Work Hole Key

Refer to level below for setting out if no dimensions at current level.

- a 200x200mm Void through slab
- b 200x400mm Void through slab
- c 200x600mm Void through slab
- d 250x250mm Void through slab
- e 1230x250mm Void through slab
- f 110mm Dia. Void through slab with cast in balcony outlet above.
- g 377mm Dia. Void through slab
- h 300x300mm Void through slab

Builderswork openings for drainage pipework to be formed using Hilti fire collars except on roofs. Gullies to be cast-in. Refer to Architect and MEP consultant drawings for location and specification.

Overall opening sizes, including any provision of manifolds for offsets, must not exceed the overall size indicated on the Structural Drawings

- Denotes 100mm recess in slab for future shower tray installation. TOC = SSL - 100mm
- Denotes Slab with sloping top surface. Soffit level flat. Refer to plans for level variation.
- Denotes Lift Entrance Recesses
- Denotes RC Upstand
- Denotes RC Upstand at Levels 04, 07, 10, 13, 16, 19, 22, 25 & 28 - Refer to drawing H8656-ARU-A4-04-DR-SE-20414 for setting out
- Denotes Column partially concealed in wall. Refer to reinforcement drawings for detailing.
- Denotes Manhole. Refer to underground drainage drawings for manhole setting out.

Notes:

- Drawings to be read in conjunction with all relevant architects and engineers drawings and specifications.
- For structural notes refer to drawings: H8656-ARP-ZZ-ZZ-DR-SE-00001.
- All dimensions are in mm unless noted otherwise.
- Do not scale this drawing.
- RC columns and walls to be grade C50/60 UNO.
- RC pile caps to be grade C40/50 U.N.O.
- RC slabs to be grade C32/40 U.N.O.
- RC retaining walls to be grade C32/40 U.N.O.
- Layout based on Architectural layouts and models as at 16/05/2025

CO1	29/05/2025	Construction Issue
Issue	Date	

ARUP

1 West Regent Street
Glasgow G2 1RW
Tel +44(0)141 332 8534
www.arup.com

Client
Barratt East London

Project Title
Crown Wharf Canning Town
Block A4

Drawing Title
Block A4
General Arrangement
Roof

Scale at A1	As indicated	Dsg/Drw/Chkd/Appd KM/LH/SB/GH
Role	Structural	
Status	S5 - Suitable for Stage Approval	
Arup Job No	288226-00	Rev C01
ID	H8656-ARU-A4-RF-DR-SE-20442	